

## MTS SINGLE-PHASE SAFETY TRANSFORMER



P:30VA IN:230VAC OUT :24VAC max. 26,3VAC


Single-phase - Control and Isolation Transformers  
30 VA  
Isolation class T 40/B

Other voltages on request.

### [Link to Product](#)

#### Illustration

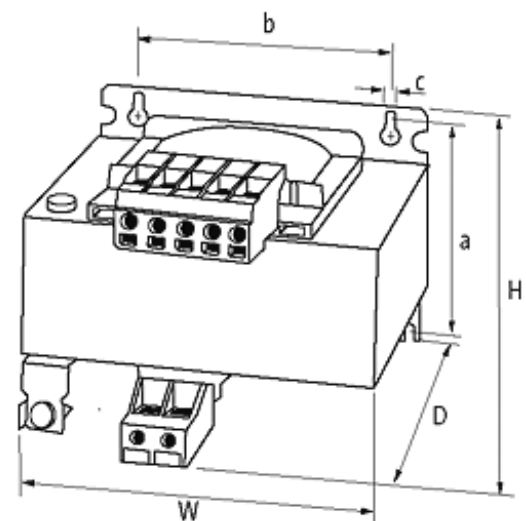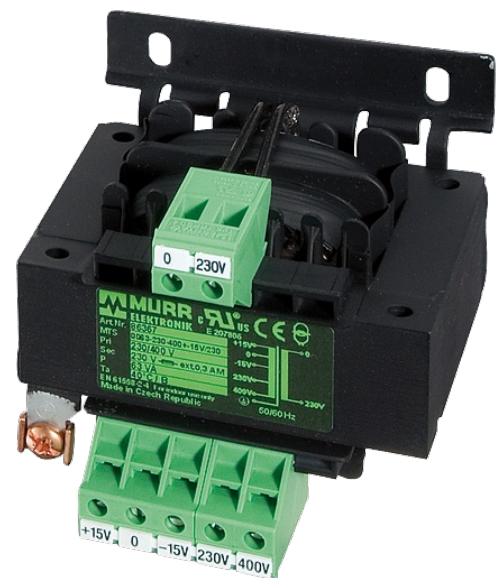

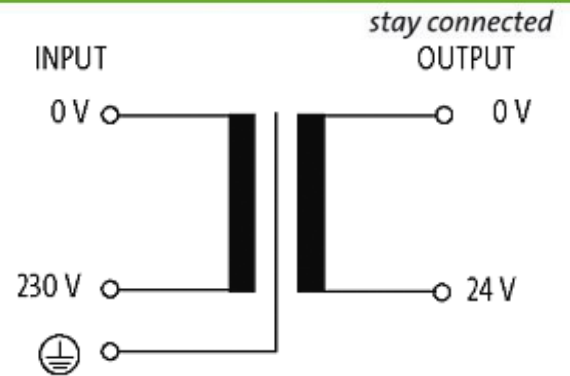

Product may differ from Image

### Input

Input voltage	230 V AC
Input current	0.15 A (230 V AC)
Inrush current	0.8 A (230 V AC)
Short-circuit current	3.1 A (230 V AC)
Frequency	50...60 Hz

### General data

Standards	EN 61558-2-6, EN 62041 category 0
Test isolation voltage	3.8 kV
Mounting method	Long-hole mounting or DIN-rail mountable TH35 (EN 60715)
Dimensions H x W x D	92x79x93 mm
Fixing centers a x b x c	56x56x4.8 mm
Drill hole Ø	4.8x10 mm
Temperature range	-20...+35 °C (storage temperature -40...+80 °C)

### Output

Output voltage	24 V AC
Output rating	30 VA

### Commercial data

country of origin	CZ
customs tariff number	85043180
EAN	4048879328807
eClass	27031202
Packaging unit	1