

MEN POWER SUPPLY 1/2-PHASE, SMOOTHED


IN: 115/230+/-15VAC OUT: :24V/1ADC


Current: 1 A
Output rating: 24 W
with MES DIN-rail adapter

This power supply units meet the (EN 61000-3-2) standard for harmonic current. For any mounting position at vertical wall.

[Link to Product](#)

Illustration

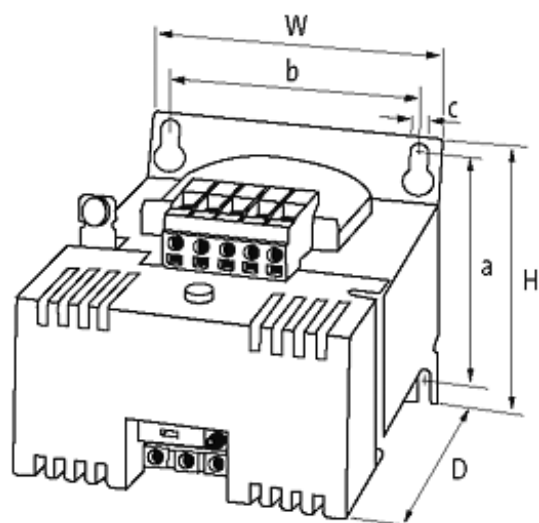

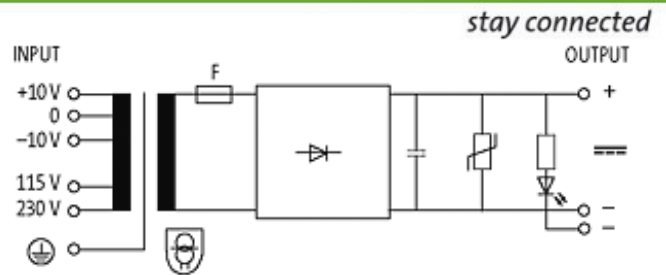

Product may differ from Image

Approvals



Input

Input fuse (external)	0.8 A (T) (115 V AC); 0.4 A (T) (230 V AC)
Frequency	50...60 Hz
Input voltage	115/230 V AC \pm 10 V AC
Input current	0.54 A (115 V AC); 0.27 A (230 V AC)

General data

Standards	EN 61558-2-6, EN 62041 category I, EN 55011 B, EN 61000-3-2
Mounting method	DIN-rail mountable TH35-15 (EN 60715) or for key-hole mounting
Dimensions H x W x D	64x78x120 mm
Fixing centers a x b x c	47.5x56x4.8 mm
Temperature range	-20...+60 °C, no condensation

Output

Output voltage	24 V DC (SELV)
Output current (T a 60/40 °C)	max. 1 A (115 V AC); 1.5 A (230 V AC)
Ripple	max. 5%rms
Output fuse	3 A (auto motive fuse FKS)
Output filter	LED, VDR and smoothing capacitor

Commercial data

country of origin	CZ
customs tariff number	85044090
EAN	4048879065726
eClass	27049002
Packaging unit	1