

## MEN POWER SUPPLY 1/2-PHASE, SMOOTHED

IN: 115/230+/-15VAC OUT: :24V/2,5ADC

Current: 2.5 A


Output rating: 60 W


with MES DIN-rail adapter

This power supply units meet the (EN 61000-3-2) standard for harmonic current. For any mounting position at vertical wall.

### [Link to Product](#)

#### Illustration

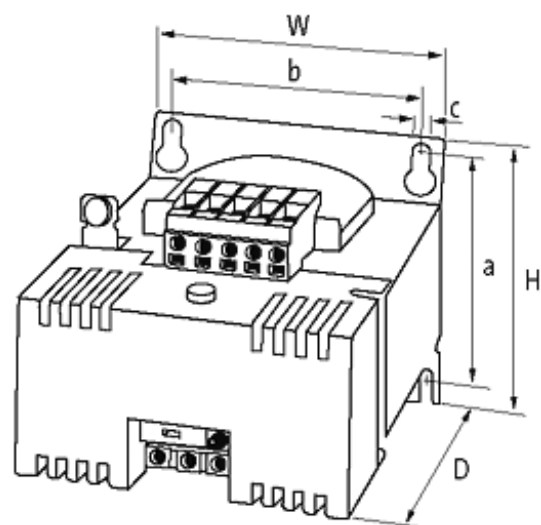

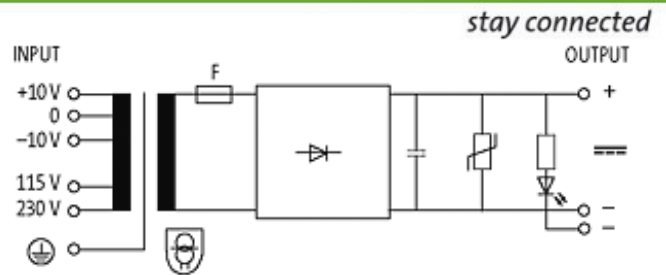

Product may differ from Image

### Approvals



### Input

Input voltage	115/230 V AC $\pm$ 10 V AC
Input current	1 A (115 V AC); 0.5 A (230 V AC)
Input fuse (external)	1.6 AT (115 V AC); 0.8 AT (230 V AC)
Frequency	50...60 Hz

### General data

Standards	EN 61558-2-6, EN 62041 category I, EN 55011 B, EN 61000-3-2
Mounting method	DIN-rail mountable TH35-15 (EN 60715) or for key-hole mounting
Dimensions H x W x D	83x84x124 mm
Fixing centers a x b x c	65.5x64x4.8 mm
Temperature range	-20...+60 °C, no condensation

### Output

Output voltage	24 V DC (SELV)
Output current (T <sub>a</sub> 60/40 °C)	max. 2.5 A (115 V AC); 3 A (230 V AC)
Ripple	max. 5%rms
Output fuse	7.5 A (automotive fuse FKS)
Output filter	LED, VDR and smoothing capacitor

### Commercial data

country of origin	CZ
customs tariff number	85044090
EAN	4048879065719
eClass	27049002
Packaging unit	1