

MEN POWER SUPPLY 1/2-PHASE, SMOOTHED


IN: 115/230+/-15VAC OUT: :24V/5ADC


Current: 5 A
Output rating: 120 W
with MES DIN-rail adapter

This power supply units meet the (EN 61000-3-2) standard for harmonic current. For any mounting position at vertical wall.

[Link to Product](#)

Illustration

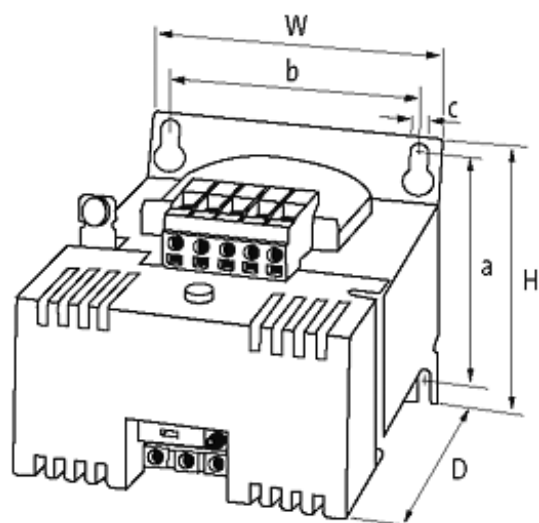

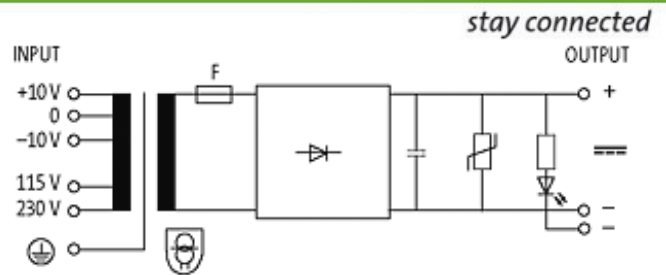

Product may differ from Image

Approvals



Input

Input voltage	115/230 V AC \pm 10 V AC
Input current	2 A (115 V AC); 1 A (230 V AC)
Input fuse (external)	3.15 AT (115 V AC); 1.6 AT (230 V AC)
Frequency	50...60 Hz

General data

Standards	EN 61558-2-6, EN 62041 category I, EN 55011 B, EN 61000-3-2
Temperature range	-20...+60 °C, no condensation
Dimensions H x W x D	95x96x136 mm
Fixing centers a x b x c	75x84x5.8 mm
Mounting method	DIN-rail mountable TH35-15 (EN 60715) or for key-hole mounting

Output

Output voltage	24 V DC (SELV)
Output current (T a 60/40 °C)	max. 5 A (115 V AC); 6 A (230 V AC)
Output fuse	10 A (automotive fuse FKS)
Output filter	LED, VDR and smoothing capacitor
Ripple	max. 5%rms

Commercial data

country of origin	CZ
customs tariff number	85044090
EAN	4048879065702
eClass	27049002
Packaging unit	1