



### Main characteristics (20 °C)

Standard process temperature	-50 ... 250 °C
Accuracy	Pt100 output as to DIN/EN/IEC 60751 Transmitter output <±0.1 °C / <±0,25 °C
Connections	Threaded

### Technical specification

Measuring principle	Resistance Temperature Detector (RTD)
Measuring ranges	-50...400 °C
Immersion tube, diameter	Ø6 mm, Ø8 mm
Immersion tube, length	Min. 20 mm - Max. 3000 mm
Immersion tube, tip	Normal response - Ø6/Ø8 mm Fast response - Ø6/Ø4 or Ø8/Ø4 mm
Process connections	See page 4

### Environment

Temperature, Ambient	-40...160 °C
- w. transmitter	-40...85 °C
- w. display	-30...80 °C
Protection rating, IEC 529	IP67 / IP69K, depending on electrical connection

Humidity, IEC 68-2-38	98%, condensing
Vibrations	DNV high vibration strain, class B 1.6 mm, 2...25 Hz IEC60068-2-6, test FC 25...100 Hz, 4.0 g

### Material

Process connection	SS 1.4404, AISI 316L
Housing	SS 1.4301, AISI 304
Sealing	See ordering table

### Approvals

Apply to	EMC directive 2004/108/CE in accordance with EN61000-6-2, EN 61000-6-3 Pressure directive 97/23/CE
----------	---

### Main features

- Pt100 sensor element, 2- or 4-wire
- HART®
- Built in graphical display, CombiView™ DFON optional
- Head mounted 4...20 mA transmitter, FlexTop type 22xx
- ATEX
- Programmable by touch screen
- Easy and full programmable with FlexProgrammer 9701

### Applications

- Oil and Gas
- Chemical
- Energy
- General Process Industrie


### Sensor element and electrical specification

Sensor type	RTD type Pt100 (acc. to DIN/EN/IEC 60751) Single or Double 2-wire or 4-wire
Accuracy	Class 1/1 B ±(0,3 + (0,005 x T)) °C Class 1/3 B ±1/3 x (0,3 + (0,005 x T)) °C Class 1/6 B ±1/6 x (0,3 + (0,005 x T)) °C Class 1/1 A ±(0,15 + (0,002 x T)) °C
Analog output	4-20 mA, 20-4 mA 4-20mA+HART® See separate data sheet, series 22xx

### Time constant, τ 0,5

Medium	Liquid	Air	Air
Velocity	0,4 m/sec.	0 m/sec.	3 m/sec.
Ø 6 mm	<6,1	<138	<27,2
Ø 6/4 mm	<1,5	<136	<21,4
Ø 8 mm	<7,6	<201	<47,7
Ø 8/4 mm	<1,5	<181	<33,6

### Temperature curve

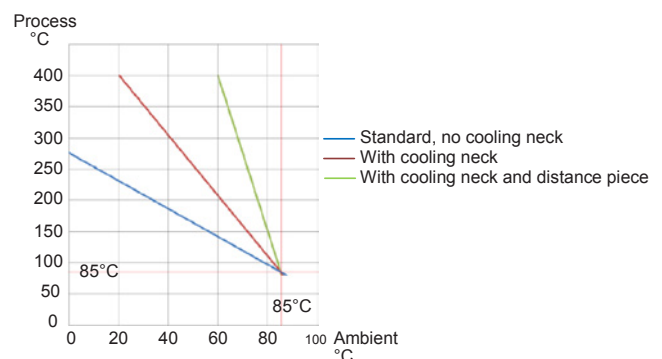

## Technical Data

### Transmitter, type FlexTop 2202 - Standard

Input	Pt100
Output	4...20 mA
Accuracy	
Input	< ±0.25°C
Output	< ±0.1% of output span (16mA)
Range	-200...850°C
Minimum span	25°C
Supply	8...35 VDC
Programmability	By FlexProgrammer 9701
For further information please see data sheet for FlexTop 2202	

### Transmitter, type FlexTop 2211 - Performance

Input	Pt100 / Pt1000 (universal)
Output	4...20 mA
Accuracy	
Input	< ±0.1°C
Output	< ±0.1% of output span (16mA)
Range	-200...850°C
Minimum span	25°C
Supply	8...35 VDC
Programmability	By FlexProgrammer 9701
For further information please see data sheet for FlexTop 2211	

### Display DFON

Type	Graphically LCD
Front glass	Polycarbonate
Display modes	8 modes, programmable, e.g. value, bar graph, analogue, tank illustration
Background	White, green, red - programmable
Measuring range	-9999...99999
Digit height	Max. 22 mm
Accuracy	0,1% @ ambient -10...70 °C
Voltage drop	4V...6.5 V
Output	2 configurable relay output, 60 Vp, 75 mA
Programming	Touch screen or FlexProgrammer 9701

Further information can be found in separate data sheet for DFON

### Transmitter, type FlexTop 2221 - Performance, HART®

Input	Pt100 / Pt1000 (universal)
Output	4...20 mA / HART®
Accuracy	
Input	< ±0.1°C
Output	< ±0.1% of output span (16mA)
Range	-200...850°C
Minimum span	25°C
Supply	8...35 VDC
Programmability	By FlexProgrammer 9701 By HART® terminal/modem
For further information please see data sheet for FlexTop 2221	

### Transmitter, type FlexTop 2212 - Performance


Input	Pt100 / Pt1000 (universal)
Output	4...20 mA / 20...4 mA
Accuracy	
Input	≤ ±0.06°C
Output	< ±0.025% of output span (16mA)
Range	-200...850°C
Minimum span	10°C
Supply	7...40 VDC
Programmability	By FlexProgram
For further information please see data sheet for FlexTop 2212	

### Transmitter, type FlexTop 2222 - Performance, HART®

Input	Pt100 / Pt1000 (universal)
Output	4...20 mA / 20...4 mA / HART®
Accuracy	
Input	≤ ±0.06°C
Output	< ±0.025% of output span (16mA)
Range	-200...850°C
Minimum span	10°C
Supply	7...40 VDC
Programmability	By FlexProgram By HART® terminal/modem
For further information please see data sheet for FlexTop 2222	

## Electrical connections

### M12, 5-wire




#### 4...20 mA

RTD Single	Double	1	+ supply, 4...20 mA
1+2	Pt100-1	2	Common for relays
3+4	Pt100-1	3	- supply, 4...20 mA
1	Pt100 - 1	4	Relay 2
2	Pt100 - 1	5	Relay 1
3	Pt100 - 2		
4	Pt100 - 2		
5	N.C.		



#### 2 x 4...20 mA

1	+ supply, FlexTop 1
2	- supply, FlexTop 1
3	- supply, FlexTop 2
4	+ supply, FlexTop 2
5	N.C.

### M12, 8-wire



1	N.C.
2	+ supply, 4...20 mA
3	Relay 2
4	Relay 2
5	Relay 1
6	Relay 1
7	- supply, 4...20 mA
8	N.C.




### Cable gland

<b>Transmitter</b>	
1	+24VDC / - 4...20mA
2	- 24VDC / +4...20mA
1	Red clip (FlexProgrammer)
2	Black clip (FlexProgrammer)

#### Display

1	+ 4...20 mA
2	- 4...20 mA
3	Relay 2
4	Relay 2
5	Relay 1
6	Relay 1
Com 1	Red clip (FlexProgrammer)
Com 2	Black clip (FlexProgrammer)



**ATEX data for temperature transmitters and displays**
**Transmitter, type FlexTop 2202 - ATEX**

Approval	Ex ia IIC T5/T6, ATEX II 1G Ex nA II T5, ATEX II 3G
Supply	8...28 VDC
Internal inductivity	$L_i \leq 10 \mu\text{H}$
Internal capacity	$C_i \leq 10 \text{nF}$
Temperature class	T1...T5: $-40 < T_{\text{amb}} < 85^\circ\text{C}$ T6: $-40 < T_{\text{amb}} < 50^\circ\text{C}$
Barrier data	U: $\leq 28 \text{VDC}$ I: $\leq 0.1\text{A}$ P: $\leq 0.75 \text{W}$



**Transmitter, type FlexTop 2221 - ATEX**

Approval	Ex ia IIC T5/T6, ATEX II 1G Ex nA II T5, ATEX II 3G
Supply	8...30 VDC (Ex nA: 12...30 VDC)
Internal inductivity	$L_i \leq 15 \mu\text{H}$
Internal capacity	$C_i \leq 5 \text{nF}$
Temperature class	T1...T5: $-40 < T_{\text{amb}} < 85^\circ\text{C}$ T6: $-40 < T_{\text{amb}} < 50^\circ\text{C}$
Barrier data	U: $\leq 30 \text{VDC}$ I: $\leq 0.1\text{A}$ P: $\leq 0.75 \text{W}$


**Transmitter, type FlexTop 2211 - ATEX**

Approval	Ex ia IIC T5/T6, ATEX II 1G Ex nA II T5, ATEX II 3G
Supply	6.5...30 VDC
Internal inductivity	$L_i \leq 1.5 \mu\text{H}$
Internal capacity	$C_i \leq 5 \text{nF}$
Temperature class	T1...T5: $-40 < T_{\text{amb}} < 85^\circ\text{C}$ T6: $-40 < T_{\text{amb}} < 50^\circ\text{C}$
Barrier data	U: $\leq 30 \text{VDC}$ I: $\leq 0.1\text{A}$ P: $\leq 0.75 \text{W}$

**Display DFON - ATEX**
**ATEX Gas ia and for ATEX Dust ia**


Approval	Gas Zone 0/1 Dust Zone 20/21	 II 1 G, Ex ia IIC T5 Ga  II 1 D, Ex ia IIIC T100°C Da
Voltage drop	$U_{\text{Disp}}$	4.5 ... 6.5 VDC
Temperature class	$L_i \leq 1.5 \mu\text{H}$ $C_i \leq 5 \text{nF}$	
Temperature class	T1...T5	Zone 0 and 20 $-20 \dots 60^\circ\text{C}$ Zone 1/2 and 21/22 $-40 \dots 65^\circ\text{C}$
Internal inductivity	$L_i$	$< 10 \mu\text{H}$
Internal capacity	$C_i$	$< 15 \text{nF}$
Barrier data	$U_i$ $I_i$ $P_i$	$< 30 \text{VDC}$ $< 0.1 \text{A}$ $< 0.75 \text{W}$

**ATEX Gas nA**


Approval	Gas Zone 2	 II 3 G, Ex nA II T5
Voltage drop	$U_{\text{Disp}}$	4.5 ... 6.5 VDC
Temperature class	T1...T5	$-30 < T_{\text{amb}} < 65^\circ\text{C}$
Internal inductivity	$L_i$	$< 10 \mu\text{H}$
Internal capacity	$C_i$	$< 15 \text{nF}$
Maximum voltage	$U_{\text{max}}$	$< 35 \text{VDC}$
Maximum current	$U_{\text{max}}$	$< 35 \text{VDC}$

**Dimensions (mm)**





Ø80 mm housing front view

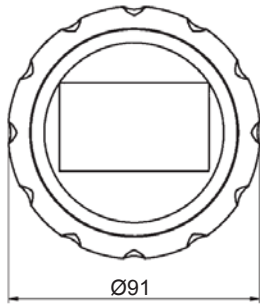

Ø80 mm housing bottom connection

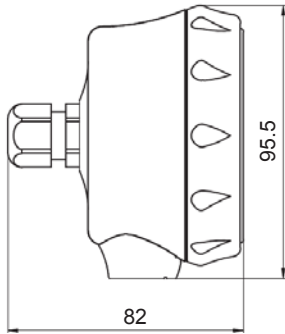

Ø80 mm housing rear connection

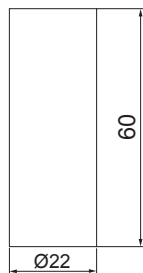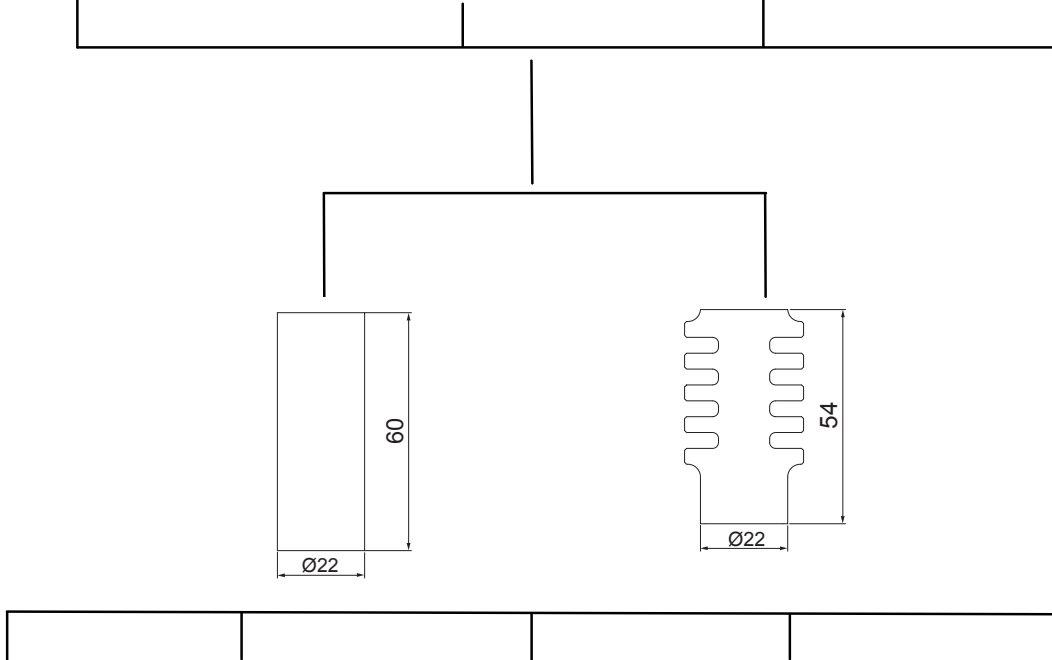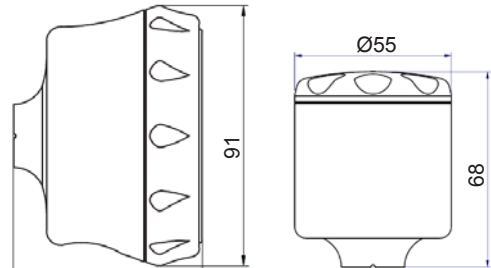

Tube without connection  
Code 10

G1/2A DIN 3852-E  
Code 11

G1/2A DIN 3852-A  
Code 12

R1/2  
Code 13

1/2" NPT  
Code 30

