



Main features

- Graphical display with backlight
- Showing errors and limits by steady or flashing colours
- Fits Baumer *CombiSeries*[™] (Ø80 mm FlexHousing)
- Hygienic design
- Option: Two configurable relay outputs
- Programmable by touch screen
- Easy and fully programmable with FlexProgrammer 9701
- ATEX
- UL

Applications

- Remote display fits for all 4 - 20 mA transmitter
- Wall mounting, panel mounting and pipe mounting

Technical Data

Input		Relay	
Measuring range	3.5...23 mA (normal working range 4...20 mA)	Contacts	2 solid state relays
Connections	2 screw terminals for loop power, signal 4 screw terminals for relay outputs	Voltage	60 Vp
Accuracy	≤ ±0.1% of input span within -10...70 °C ≤ ±0.2% of input span within -30...-10 °C / 70...80 °C	Load Current	75 mA
Loop voltage drop	Two levels depending on chosen backlight brightness @ 20 mA : - Low bright backlight (<40%) : Max. 4V @23 °C - High bright backlight (>40%) : Max. 6.5V @23 °C	Max On resistance	10 Ohm The built in relays are not activated as standard. They can be activated at purchase or SW activation code can be purchased later.
Sample time	≤ 1 second. Typical 0.3 second	Display	
Start-up time	≤ 5 second	Type	FSTN Graphically LCD
User-configurable data		Measuring range	-9999...99999
Measuring range	4...20 mA	Digit height	Max. 22 mm
Error/warning indication	Individually configurable display and backlight indication in white, green or red colour, steady or flashing light. Configurable limits between 3.5 and 23 mA	EMC data	
Zoom on range	Minimum 2 mA of input span	Immunity	EN 61326
Damping	0...30 seconds	Emission	EN 61326
Linearization table	2 to 30 points	EMC immunity Influence	≤ ±1% of input FS
Measuring unit (standard selectable)	°C, °F, K bar, mbar, kPa, MPa, psi, kg/cm ² , mmHg, mH ₂ O, atm, "Hg, mHg, "H ₂ O, %, l/h, Ton, m ³ , m ³ /h, Hz, mS, mV, V, ohm, Hz, sec, %, mA, or user defined (programmable with FlexProgrammer)	Communication	
User defined unit	8 x 20 pixels matrix	FlexProgrammer 2-way communication for configuration.	
Dec. point position	xxxxx, xxxx.x, xxx.xx, xx.xxx, x.xxxx, .xxxxx, AUTO	Test conditions	
		Operating temperature	23°C ± 2 °C
		Compliance and approvals	
		Approvals	cULus listed, E491206 IEC 61010-1:2010 IEC 61010-2-201:2013

Technical Data

Environmental conditions

Optimal readability	-10...70 °C
Operating temperature	-30...80 °C
Storage temperature	-40...85 °C
Humidity	max. 98% RH, condensing
Vibrations	IEC60068-2-6, test FC 25...100 Hz, 4.0g DNV high vibration strain, class B 1.6mm, 2...25 Hz
Mechanical tolerances	ISO 2768-m

Mechanical data

Dimensions	See dimensional drawing
Material	Polycarbonate plastic
Enclosure	FlexHousing and front ring stainless steel, AISI 304
Protection class	IP 10 on terminals IP 67 in FlexHousing
Weight	100 g - display alone 170 g - display incl. front ring 475 g - display in FlexHousing for wall mounting

Other data

Temperature drift	≤ 0,001%/10K (inside optimal readability temperature range) ≤ 0,0015%/10K (outside optimal readability temperature range)
Power up time	≤ 15 sec.

Disposal of product and packing

According to national laws or by returning to Baumer.


ATEX Gas ia and for ATEX Dust ia

Approval	Gas Zone 0/1	II 1 G, Ex ia IIC T5 Ga
	Dust Zone 20/21	II 1 D, Ex ia IIIC T100°C Da
Voltage drop	U_{Disp}	4.5 ... 6.5 VDC
Temperature class	T1...T5	Zone 0 and 20 -20 ... 60 °C Zone 1/2 and 21/22 -30 ... 65 °C
Internal inductivity	L_i	<10 µH
Internal capacity	C_i	<15 nF
Barrier data	U_i	<30 VDC
	I_i	<0.1 A
	P_i	<0.75 W

ATEX Gas nA

Approval	Gas Zone 2	II 3 G, Ex nA II T5
Voltage drop	U_{Disp}	4.5 ... 6.5 VDC
Temperature class	T1...T5	-30 < T_{amb} < 65 °C
Internal inductivity	L_i	<10 µH
Internal capacity	C_i	<15 nF
Maximum voltage	U_{max}	<35 VDC
Maximum current	I_{max}	<0.1 A


Electrical connections



- Terminal 1 - Supply +
- Terminal 2 - Supply -
- Terminal 3 - Relay 2
- Terminal 4 - Relay 2
- Terminal 5 - Relay 1
- Terminal 6 - Relay 1

Programming

Connect the FlexProgrammer to the *CombiView*, DFON as per below.



It is not necessary to disconnect the power to the *CombiView*, DFON display

The FlexProgrammer 9701 is a dedicated tool to Configure all Baumer configurable products.



FlexProgrammer, No. : 9701.0001

The FlexProgrammer interface unit will be delivered complete including


- CD with FlexProgram software
- Product drivers (DTM-files)
- cables

The *CombiView*, DFON can also be programmed by the touch bottoms on the display. Please see "Operating instructions for *CombiView*, DFON".


Electrical connections

ATEX Gas ia and for ATEX Dust ia


Display in the zone, transmitter outside the zone

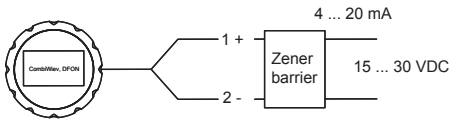


Display and transmitter in the zone

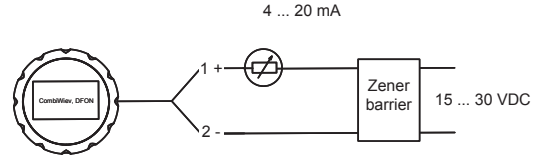

Display in the zone/transmitter outside the zone

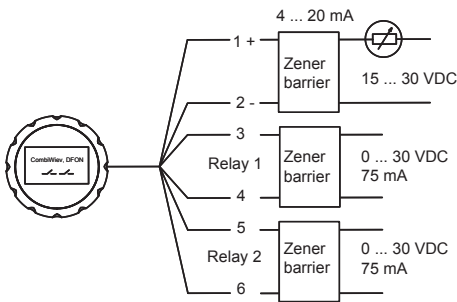


Display and transmitter in the zone

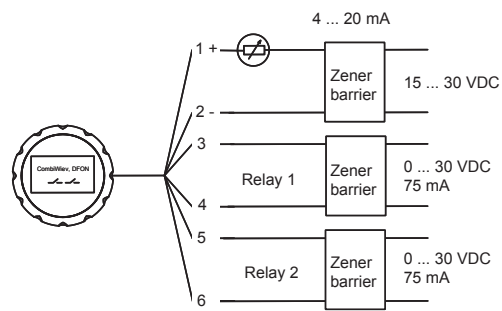


ATEX Gas nA

Display without relay output



Display with relay output

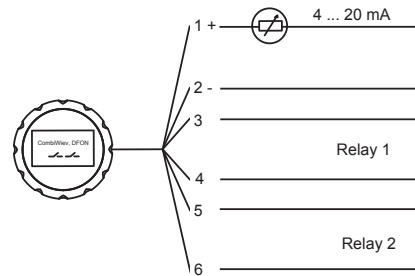

Selectable views



Value
Small / Large



Analog
w. Bar graph / Value



Bar graph
Vertical / horizontal



Tank illustration
Tank / Bottle

Visual alert




Status ok



Alert status

Drawings / Dimensions in mm

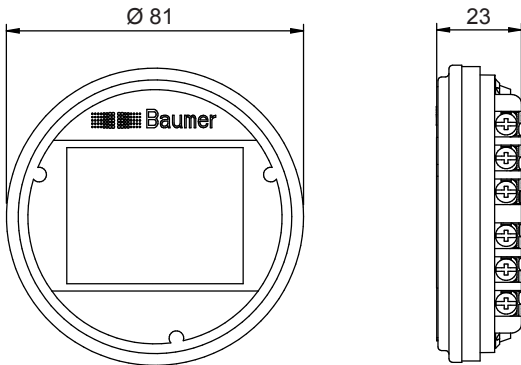


Mounting for stand alone instrument

Wall mounting, DFON-xxx2.2x




FlexHousing with Ø110 mm rear flange with 3 x Ø4 mm holes for screws



Panel mounting, DFON-xxx2.30




Ø110 mm front flange with 3 x Ø4 mm holes for screws

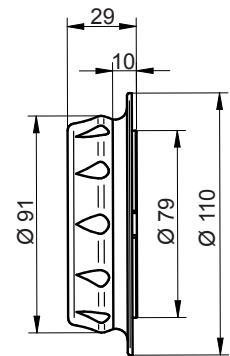

Pipe mounting, DFON-xxx2.4x / ...2.5x / ...2.6x



FlexHousing with pipe bracket for Ø38, Ø51, Ø64 mm stand pipe

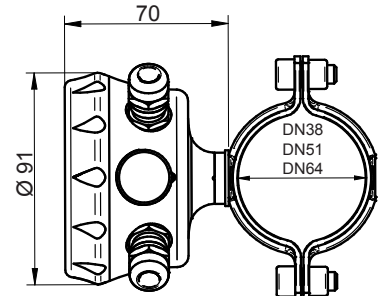

Ordering details

	DFON	-							
Model	DFON								
<i>CombiView</i>									
Safety									
Standard									1
EX II 3G, Ex nA II T5									3
EX II 1 G Ex ia IIC T5 Ga or EX II 1D Ex ia IIIC T100°C Da									5
Relays									
Not activated									1
Activated									2
Configuration									
None									0
Configured according to customer specification									1
Front ring									
None									0
Front ring for FlexHousing (CombiSeries)									2
Housing									
None									0
FlexHousing wall mounting									2
FlexHousing panel mounting									3
FlexHousing tube mounting DN38									4
FlexHousing tube mounting DN51									5
FlexHousing tube mounting DN64									6
Electrical connection on housing									
None									0
1 x M16 plastic cable gland									3
2 x M16 plastic cable gland									4
1 x M16 stainless steel cable gland									5
2 x M16 stainless steel cable gland									6
1 x M20 plastic cable gland									7
2 x M20 plastic cable gland									8
1 x M20 stainless steel cable gland									9
2 x M20 stainless steel cable gland									A
2 x M12, 4 pins stainless steel (female + male) for PF20x									B
2 x M12, 4 pins stainless steel (female + male) for 4...20 mA									C
1 x M16 stainless steel cable gland + 1 x M12, 4 pins stainless steel (male) for PF20x									D
1 x M16 stainless steel cable gland + 1 x M12, 4 pins stainless steel (male) for 4...20 mA									E

Accessories, Software for relays

Activation code for relays (for instruments with not activated relays)
UnitCom ribbon cable (for retrofitting of DFON on AFix and PFMx)

DFO-SW
11128715