


Incremental encoders

Blind hollow shaft $\varnothing 20$ to $\varnothing 27$ mm

200...2048 pulses per revolution

ITD 40 A 4 Y141

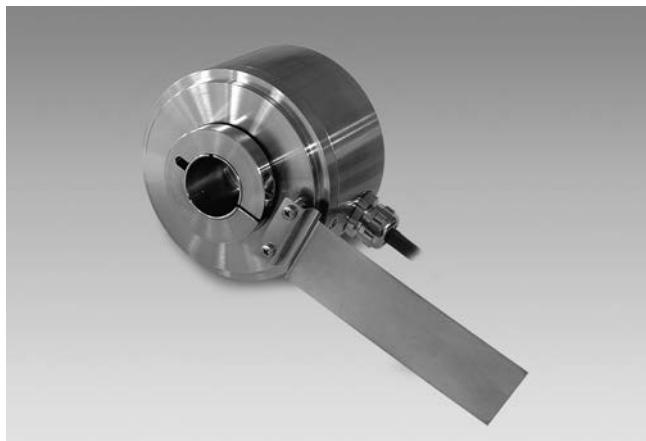

ITD 40 A 4 Y141 with blind hollow shaft

Features

- Encoder with blind hollow shaft $\varnothing 20$... $\varnothing 27$ mm
- Max. 2048 pulses per revolution
- Optical sensing method
- Stainless steel design (1.4305)
- Mounting by torque support
- TTL or HTL output signals
- Cable output radial
- High protection

Optional

- Cable with connector

Technical data - electrical ratings

Voltage supply	5 VDC ± 5 % 8...30 VDC
Reverse polarity protection	Yes
Consumption w/o load	≤ 100 mA
Pulses per revolution	200...2048
Reference signal	Zero pulse, width 90°
Sensing method	Optical
Output frequency	≤ 120 kHz
Output signals	A, B, N + inverted
Output stages	TTL linedriver (short-circuit proof) HTL push-pull (short-circuit proof)
Interference immunity	DIN EN 61000-6-2
Emitted interference	DIN EN 61000-6-3

Technical data - mechanical design

Size (flange)	$\varnothing 89$ mm
Shaft type	$\varnothing 20$ mm (blind hollow shaft) $\varnothing 22$ mm (blind hollow shaft) $\varnothing 25$ mm (blind hollow shaft) $\varnothing 27$ mm (blind hollow shaft)
Mounting kit	081
Protection DIN EN 60529	IP 66
Operating speed	≤ 2500 rpm
Starting torque	≤ 0.02 Nm ($+20$ °C)
Materials	Housing: stainless steel Shaft: stainless steel
Operating temperature	-20 ... $+70$ °C
Relative humidity	90 % non-condensing
Resistance	DIN EN 60068-2-6 Vibration 10 g, 55-2000 Hz DIN EN 60068-2-27 Shock 100 g, 11 ms
Connection	Cable 1 m
Weight approx.	1850 g

Incremental encoders


Blind hollow shaft $\varnothing 20$ to $\varnothing 27$ mm
200...2048 pulses per revolution

ITD 40 A 4 Y141

Part number

ITD 40 A 4 Y141

			KR1	S		IP66	081
--	--	--	-----	---	--	------	-----

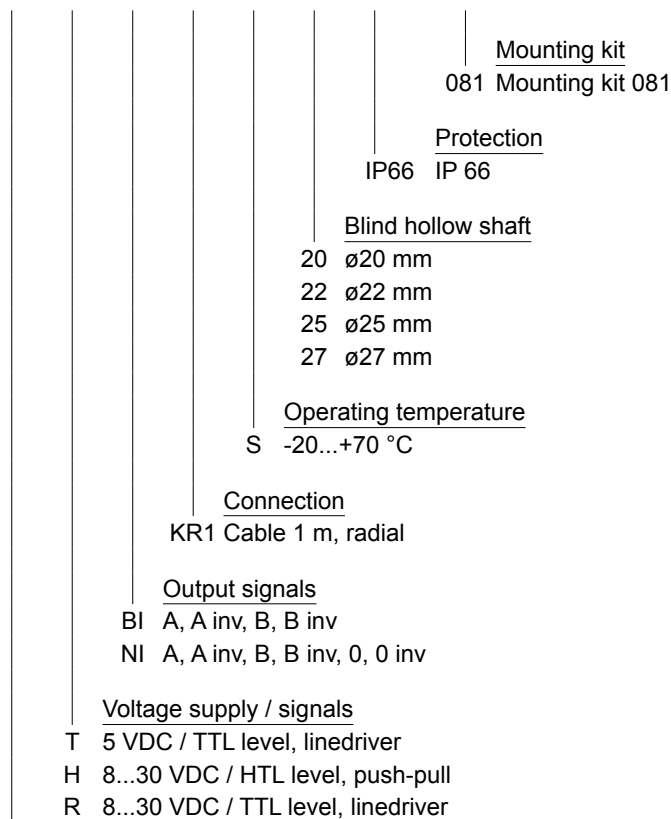

Pulse number - see table

Pulse number

200	500	720	1024
360	512	1000	2048

Incremental encoders

Blind hollow shaft $\varnothing 20$ to $\varnothing 27$ mm


200...2048 pulses per revolution

ITD 40 A 4 Y141


Output signals

Clockwise rotation when looking at the mounting side.

BI-Output signals

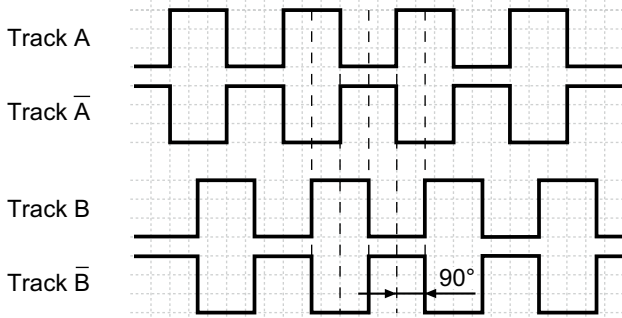

NI-Output signals

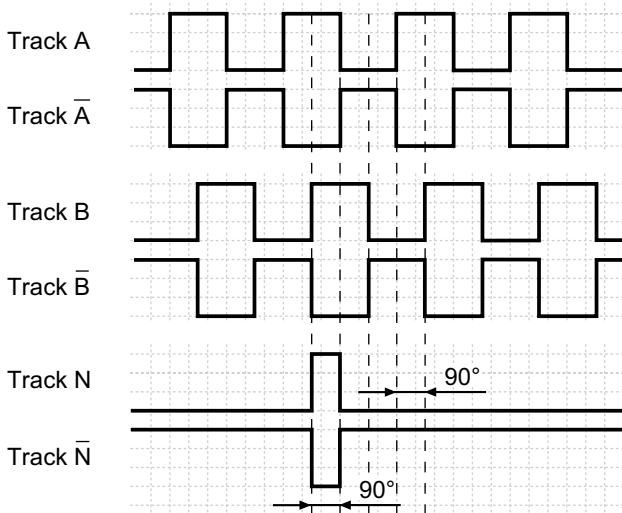

Terminal assignment

Core colour	Assignment
green	Track A
yellow	Track A inv.
grey	Track B
pink	Track B inv.
brown	Track N
white	Track N inv.
rot	UB
blue	GND
violet	UB-Sense
black	GND-Sense
transparent	Shield/Housing


Trigger level

Outputs	Linedriver
Output level High	≥ 2.4 V
Output level Low	≤ 0.5 V
Load	≤ 70 mA

Outputs	Push-pull short-circuit proof
Output level High	$\geq UB - 3$ V
Output level Low	≤ 1.5 V
Load	≤ 70 mA

Dimensions

mounting side
(proposition)

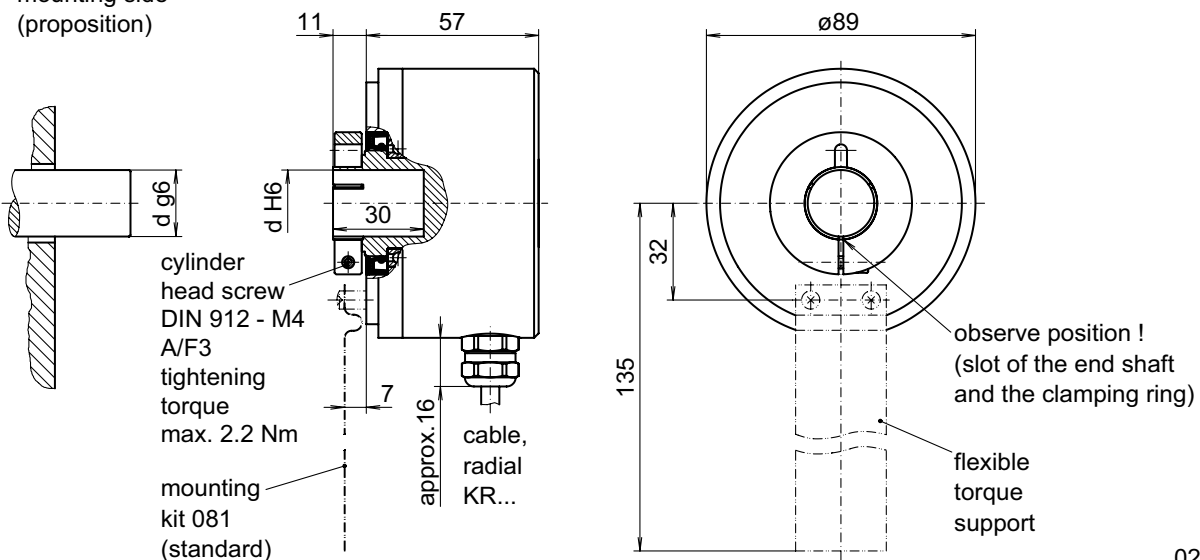

026- 5 Y141

Incremental encoders
Blind hollow shaft $\varnothing 20$ to $\varnothing 27$ mm
200...2048 pulses per revolution

ITD 40 A 4 Y141
