


Magnetic proximity switches

MFRM 08N3524/PL

dimension drawing



general data

type	magneto-resistive
nominal sensing distance S_n typ.	60 mm
output indicator	LED red
mounting type	flush
nominal operation point	2,5 mT
hysteresis	2 ... 20 % of S_r
repeat accuracy	< 1 % of S_r

electrical data

switching frequency	< 5 kHz
voltage supply range +Vs	10 ... 30 VDC
current consumption max. (no load)	20 mA
voltage drop Vd	< 3 VDC
output current	< 150 mA
output circuit	NPN break function (NC)
short circuit protection	yes
reverse polarity protection	yes, Vs to GND

mechanical data

material (sensing face)	PBT
type	cylindrical threaded
dimension	8 mm
housing material	stainless steel
housing length	30 mm
connection types	cable PUR, 2 m


ambient conditions

operating temperature	-25 ... +75 °C
protection class	IP 67

photo



connection diagram

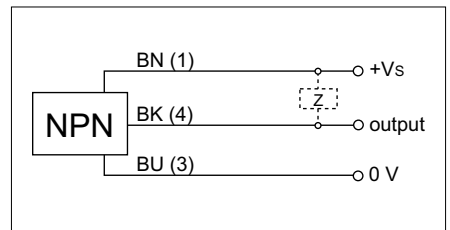

- nominal sensing distance S_n typ. in conjunction with permanent magnet 11053959 (available as an accessory)