


Passive distributor ASi/AUX as profile cable branch

2 x ASi profile cable

2 x AUX profile cable

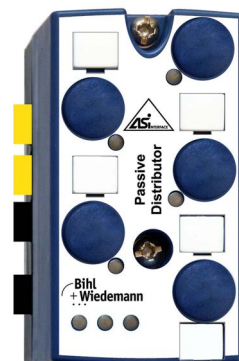


(figure similar)



Article no.	BWU4729
Connection	
Profile cable, piercing technology	2 x ASi and 2 x AUX
Operating voltage	≤ 35V
Operating current	profile cable, piercing technology: ≤ 8A
Environment	
Applied standards	EN 61000-6-2 EN 61000-6-3
Can be used in passively safe paths up to SIL3/PLe	yes ¹
Operating altitude	max. 2000 m
Ambient operating temperature	-30 °C ... +70 °C
Storage temperature	-30 °C ... +85 °C
Protection category (EN 60529)	IP67
Allowed shock and vibration stress	≤15 g, T≥11 ms 10 ... 55 Hz, 0,5 mm amplitude
Voltage of insulation	≥500 V
Dimensions (W / H / D) in mm	45 / 80 / 42

¹ The module is suitable for use in passively safe paths because an exclusion of errors can be assumed for the connection of the two potentials, ASi and AUX.

Passive Distributor ASi/AUX, IP67

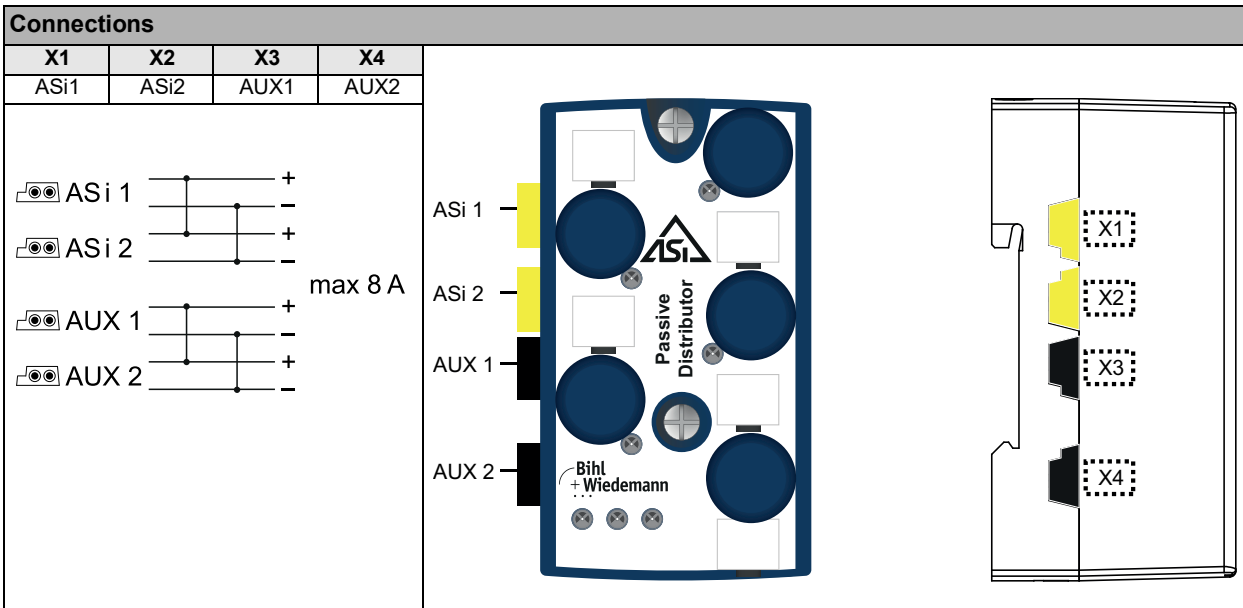

Accessories:

- ASi substructure module for 4-channel module in 45 mm-housing (art. no. BW2349)
- ASi substructure module (CNOMO) 4-channel module in 45 mm-housing (art. no. BW2350)