

Amplifiers AC/DC • Automatic adjustment

Series SKM 522

AC 85 V...AC 260 V





DC 24 V

Relay output

Programming with push-buttons

Automatic adjustment

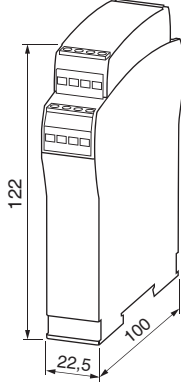
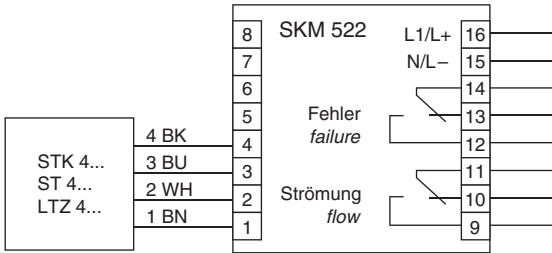
| Design | SKM 522 WR | SKM 522 GR |
|----------------------------|--|--|
| Dimensions |  | |
| ID-No. | P11336 | P11337 |
| Type | SKM 522 WR | SKM 522 GR |
| Output |  Relay |  Relay |
| Supply voltage [V] | 85 AC...260 AC | 24 DC ±20% |
| Turn off delay [s] | 0...20 programmable | |
| Output | 2x relay / change-over | |
| Switching voltage max. [V] | 250 AC / 60 DC | |
| Switching current max. [A] | 4 AC / 4 DC | |
| Switching power max. | 1000 VA / 60 W | |
| Ambient temperature | -20...+60 | |
| Additional functions | cable break monitoring, turn off delay, supply voltage monitoring | |
| Protection [EN 60529] | terminal: IP 20 / housing: IP 40 | |
| Connection | terminal screws | |
| Amplifier for probe | STA..., STB..., STC..., STD..., STK..., ST... (none Ex), LTZ... | |
| |  | |