




Amplifiers

Series IU

For the connection of separate sensors

LED display

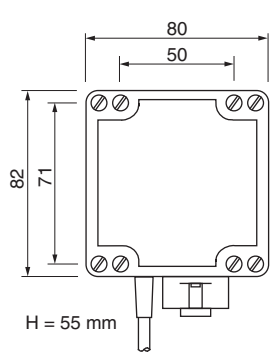

Design	IU 130...	
Dimensions		
ID-No.	P30438	P30439
Type	IU 130 WP	IU 130 GPP
Supply voltage [V]	230 AC ±10%	24 DC ±10%
Switching current [mA]	400	
Short circuit proof	-	
Current consumption [mA]	15	
Operating distance	adjustable	
Hysteresis max. [%]	adjustable	
Output	programmable	
Switching frequency [Hz]	5	15
Ambient temperature [°C]	-20...+70	
EMC-class	A	
Protection [EN 60529]	IP 67	
Function indicator	LED yellow	
Stand-by indicator	LED green	
Housing material	PBT	
Connection sensor	C 16 plug connection	
Connection amplifier	2 m PVC-cable 4x0.75 mm ²	2 m PVC-cable 3x0.50 mm ²
	<p>connection amplifier</p> 	<p>connection amplifier</p> 
Accessories	external plug C 16 (Z00039)	