

Demanding environment

Series IGM - Proximity switches

M12 / M18 / M30

Metal sleeve



DC 10...48 V

Short form

Increased EMC



Design	DC PNP • M12x1		DC PNP • M18x1		DC PNP • M30x1.5	
Dimensions						
Installation flush (f) non flush (nf)						
Operating distance sn [mm]	2 f	4 nf	5 f	8 nf	10 f	15 nf
GSP	ID-No. P31246 Type IGMU 02 GSP	ID-No. P31247 Type IGMU 04 GSP	ID-No. P31305 Type IGMU 05 GSP	ID-No. P31306 Type IGMU 08 GSP	ID-No. P31307 Type IGMU 10 GSP	ID-No. P31308 Type IGMU 15 GSP
GSOP	ID-No. - Type -	ID-No. - Type -	ID-No. P31250 Type IGMU 05 GSOP	ID-No. P31251 Type IGMU 08 GSOP	ID-No. P31254 Type IGMU 10 GSOP	ID-No. P31255 Type IGMU 15 GSOP
Supply voltage [V]	10...48 DC					
Switching current [mA]	200					
Short circuit proof	•					
Reverse protection	•					
Voltage drop max. [V]	2					
Current consumption [mA]	2.5					
Switching frequency [Hz]	500					
Ambient temperature [°C]	-25...+75					
EMC-class	A					
Protection [EN 60529]	IP 67					
LED display	•					
Housing material	Br-Ni / PBT					
Connection	M12 connector					

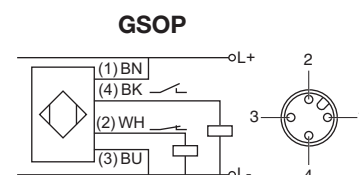

Accessories connecting cable SLG 3-2 (GSP) / SLG 4-2 (GSOP), page 3.69