

Amplifier

Series OKZ

AC-Voltage supply

DC-Voltage supply

LED indication


Cable break and short circuit monitoring




Design

OKZ 550 GWR

Dimensions



ID-No.	P50030
Type	OKZ 550 GWR
Supply voltage [V]	24 DC / 230 AC
Current consumption [mA]	60 / 10
Sensing range	adjustable
Hysteresis	max. 10%
Light on / dark on	switchable
Output	relay with change-over contact
Switching current	max. 4 A / 250 V AC
Switching power	1000 VA / $\cos \varphi > 0.7$ / L/R < 200 ms
Switching frequency [Hz]	5
Ambient temperature [°C]	-20...+60
EMC-class	A
Protection [EN60529]	screw terminals IP 20, housing IP 40
Function indicator	LED yellow
Housing material	Polycarbonate

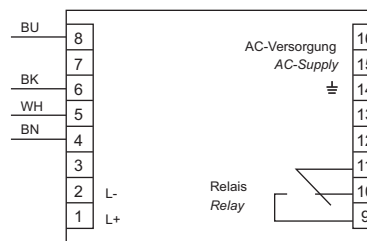

Connection

screw terminals