

High performance through beam sensors

Series ULM


Range up to 100 m




Design

M30x1.5

Dimensions



Sensing range [m]	100	
Function	Transmitter	Receiver
ID-No.	P50001	P50002
Type	ULMS 030 VS	ULME 030 VS
Ambient temperature [°C]	-20...+70	
Field of view [°]	10	
EMC-class [mm]	A	
Housing material	brass-nickel	
Protection [EN 60529]	IP 67	
Connection	5 m PVC-cable 4x0.34 mm ²	

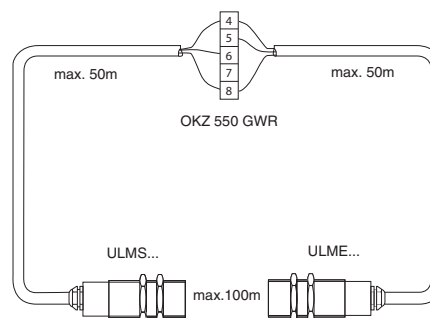

Note

required amplifier series OKZ 550 GWR, see page 5.10