

Ultrasonic thru scan

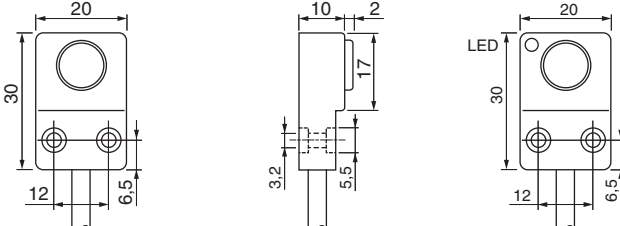

Series ARK

Rectangular housing
30x20x12 mm

DC 18...30 V

High switching frequency



Design	DC PNP • rectangular housing 30x20x12	
Dimensions		
Sensing distance max. [mm]	0...300	
Function	Transmitter	Receiver
Output		
ID-No.	P72029	
Type	ARK 300 GSP	
Supply voltage [V]	18...30 DC	
Current consumption [mA]	< 40	
Switching current [mA]	500	
Switching frequency [Hz]	150	
Ambient temperature [°C]	-15...+60	
Protection [EN 60529]	IP 67	
Housing material	PBTP	
Connection	2 m cable	

