

ITEM 100570 ZSB100570

Description	Technical data	Accessories	Downloads
-------------	----------------	-------------	-----------



Features

- › 3-stage function
- › Housing G3
- › Coiled connection cable, 7 m
- › Two illuminated buttons
- › Including holder

Switching element

220 2 NO + 2 NC ➞

Cable

The high quality connection cables (individual screening of the safety contacts) are available coiled.

3-stage function

Enabling function is active only in the second stage (middle position, actuating point). If the pushbutton is released or pushed further (panic function), the enabling is removed (dependent on the wiring, see function sequence).

+ and - buttons

These buttons can be configured individually. For example, for moving axes in positive or negative direction.

Approvals



Mechanical values and environment

Material	Housing	Plastic yellow
	Cap	Elastomer PAK arm, black
Weight		
	Net	2,5 kg
Ambient temperature		-5 ... 50 °C
Degree of protection		IP65
Mechanical life	Position 1-2-1	min.0,1 x 10 ⁶
	Position 1-2-3-1	min.0,1 x 10 ⁶
Switching principle		Slow-action contact element
Number of positively driven contacts		2
Number of NO contacts		2
Connection		Flying lead
Cable length		
	coiled	7 m

Electrical connection ratings

Rated conditional short-circuit current		100 A
Utilization category according to EN 60947-5-1		
	AC-15	2A 24V 400mA 24V
	DC-13	2A 24V 100mA 24V
Short circuit protection according to IEC 60269-1		
	at 24V	2A gG ^[1]
	Additional elements at 24V	0.1A gG ^[2]
Rated insulation voltage U _i		250 V
Rated impulse withstand voltage U _{imp}		0,8 kV
Switching voltage		
	Min. at 10mA	min.12 V

Switching current	Min. at 24 V	min.1 mA
Degree of contamination (external, according to EN 60947-1)	Industry	3
Connecting cable	8x0.5mm ² + 8x0.14mm ² [3]	

Miscellaneous

Additional feature	Version	2 illuminated buttons (+ and -)
--------------------	---------	---------------------------------

Reliability values acc. to EN ISO 13849-1


	Enabling switch
B10 _D	0,5 x 10 ⁶

--


[1, 2] In case of operating voltages other than DC 24V, the short circuit protection must be dimensioned accordingly and checked.


[3] 4x0.5mm² screened + 4x0.5mm² unscreened + 8x0.14mm² unscreened. Outer screen over everything.

Dimension drawing

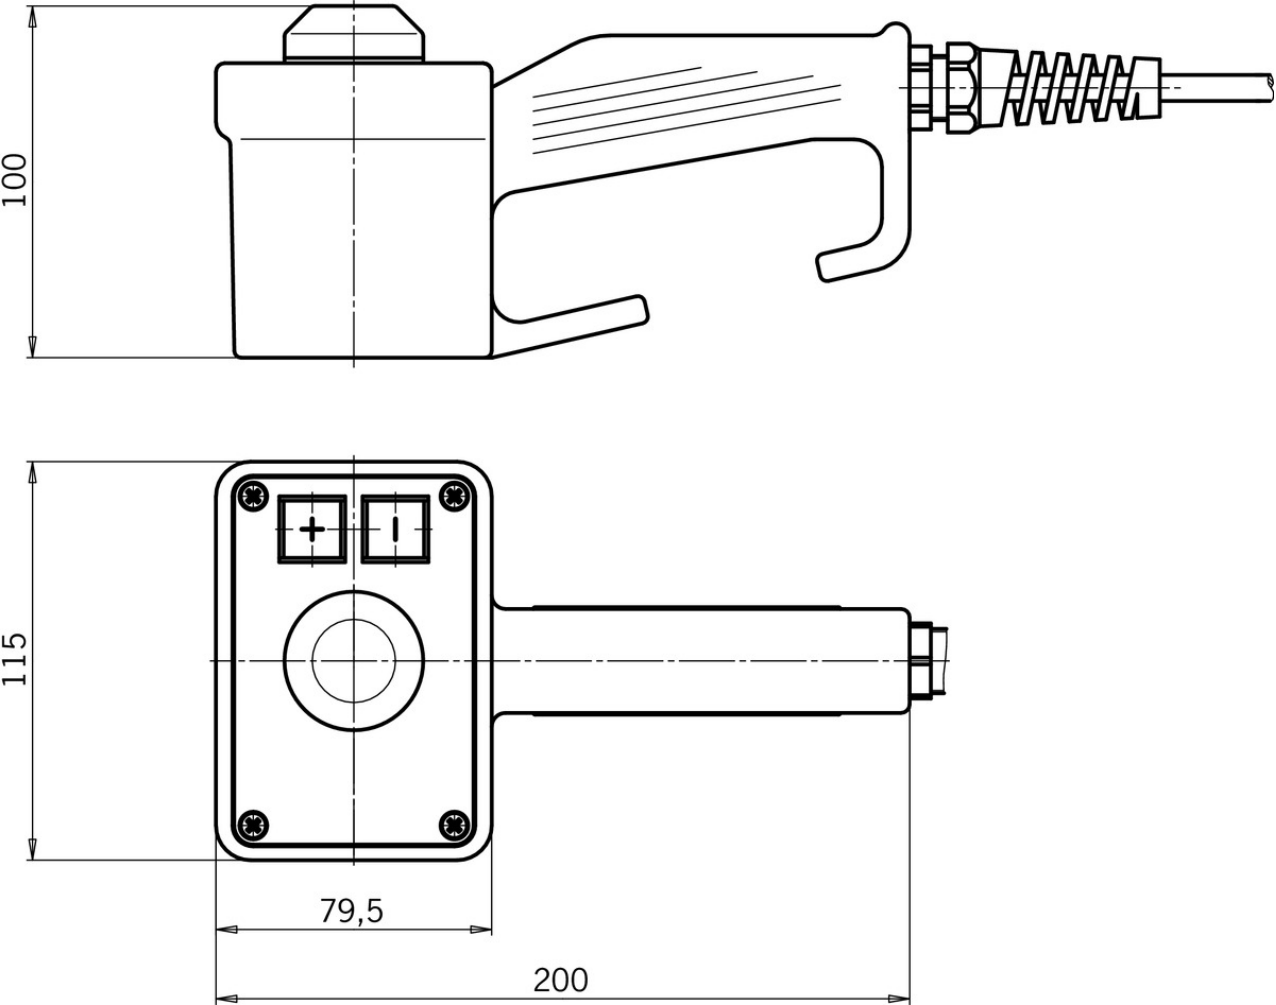


Dimension drawing

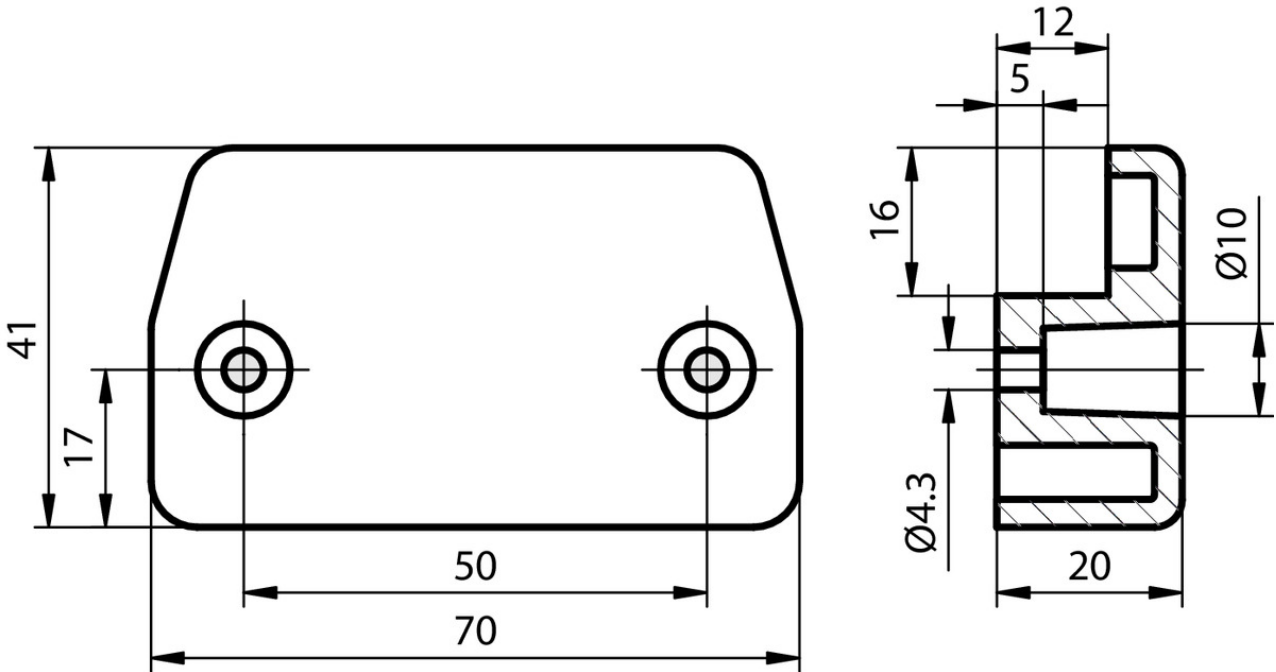

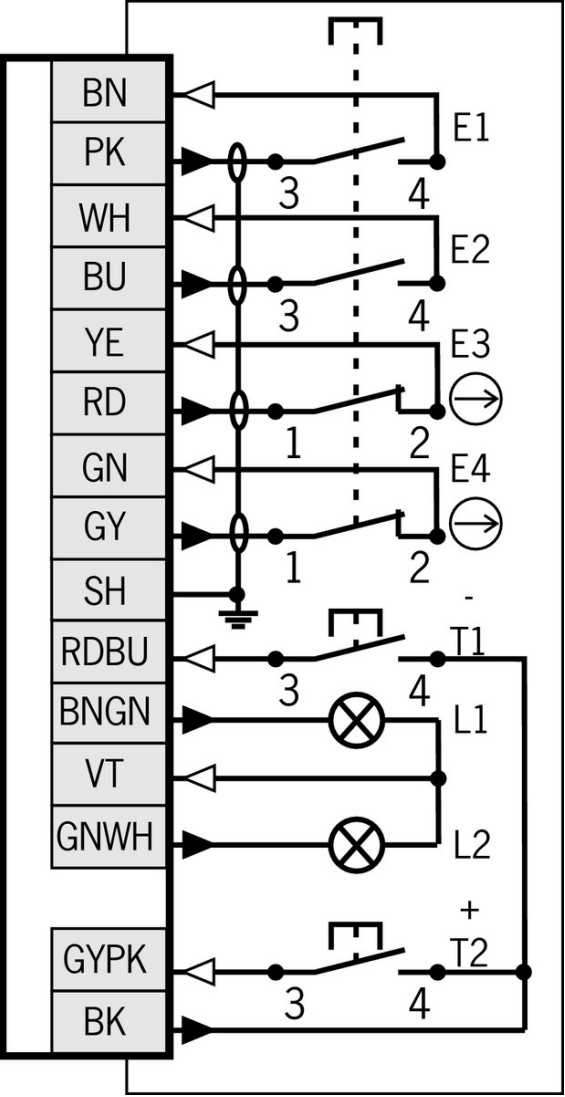



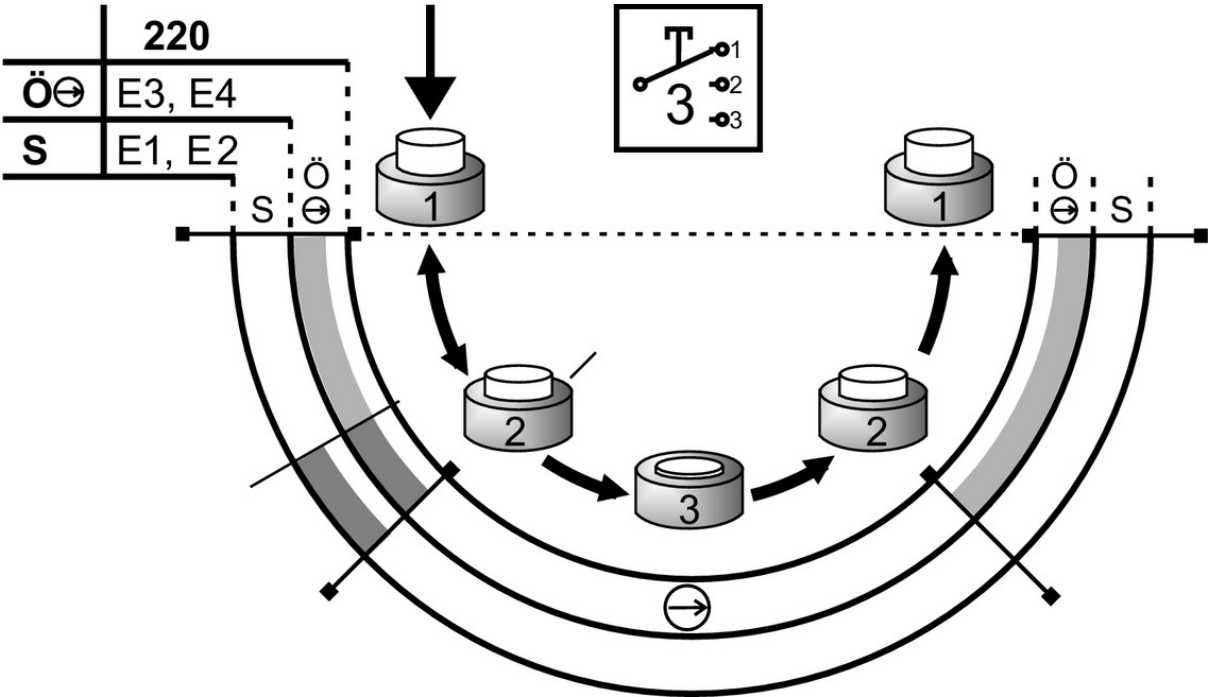


Travel diagram









Instructions

▼ Betriebsanleitung Zustimmtaster ZSB

	Doc. no.	Version	Language	Download
Betriebsanleitung Zustimmtaster ZSB	092782	06-12/13		 0.5 MB
Mode d'emploi de la commande d'assentiment ZSB				
Istruzioni di impiego del pulsante di consenso ZSB				
Operating Instructions Enabling Switch ZSB				






Catalogs

▼ Enabling switches ZS Commandes d'Assentiment ZS Zustimmtaster ZS

	Doc. no.	Version	Language	Download
Zustimmtaster ZS	095689	08-07/18		 9.1 MB
Commandes d'Assentiment ZS	097367	08-07/18		 4.9 MB
Enabling switches ZS	095690	08-07/18		 4.9 MB

Declaration of conformity

▼ EU-Konformitätserklärung

	Doc. no.	Version	Language	Download
EU-Konformitätserklärung	2109392	04-11/16		 0.2 MB
Declaración UE de conformidad				
Déclaration UE de conformité				
Dichiarazione di conformità				
EU declaration of conformity			