

## ITEM 077791 CES-A-BMB

Description	Technical data	Accessories	Downloads
-------------	----------------	-------------	-----------



### Features

- › Cylindrical design M12 x 0.75

### Insertion tool

With the aid of the insertion tool, the actuator CES-A-BMB (cylindrical design) can be screwed into a prepared M12 x 0.75 thread in safety doors.

### Approvals



### Mechanical values and environment


Housing material	Sleeve	Stainless steel
	Active face	Ceramic (AL2 O3)

Weight	Net 0,002 kg
Ambient temperature	-25 ... 85 °C
Ambient pressure	max.10 bar
Only applies if the pressure acts on all sides of the actuator	
Degree of protection	IP67 / IP69 / IP69K
Mounting method	Screws, flush in steel
Installation position	Active face opposite read head

### Electrical connection ratings

Power supply	Inductive via read head
--------------	-------------------------

### Dimension drawing

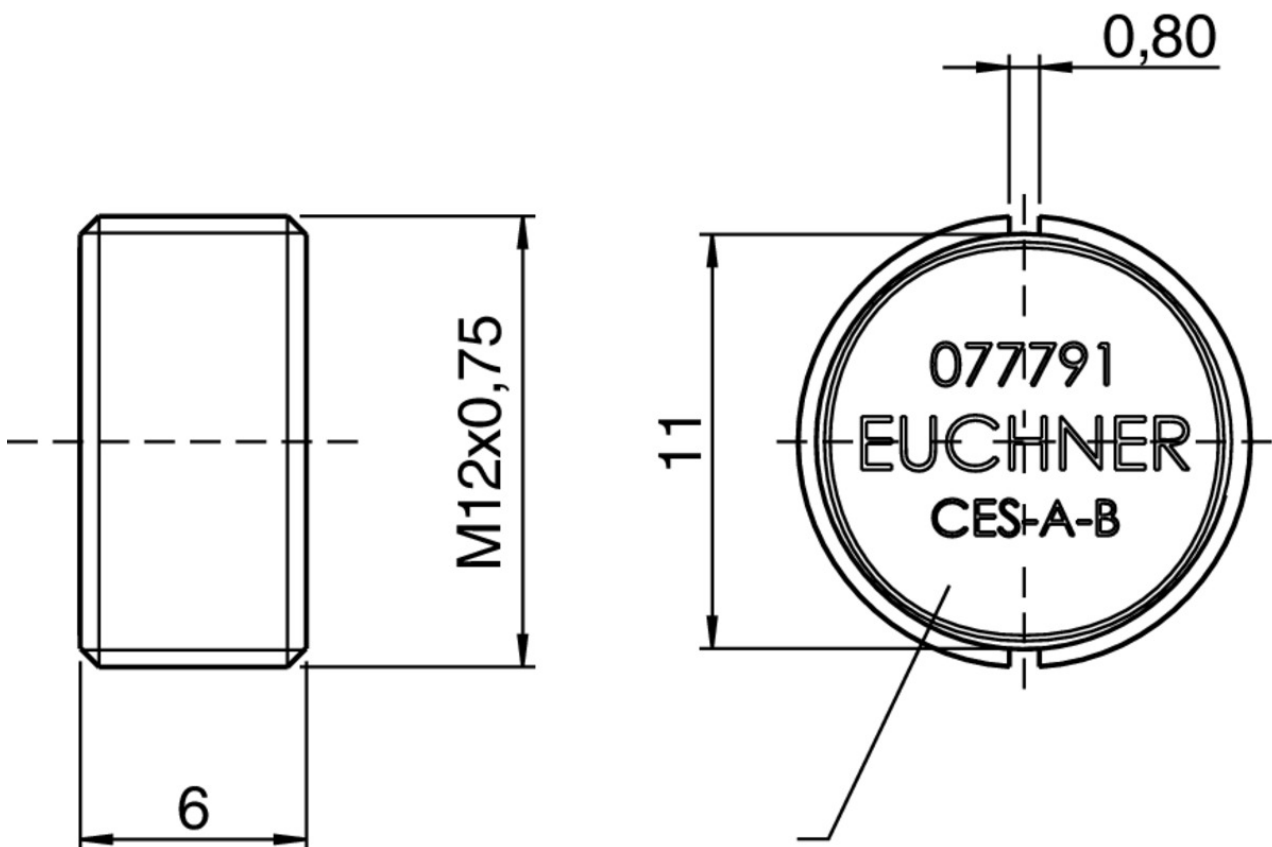

### Mounting accessories









- ✓ Insertion tool for actuator CES-A-BMB



**037662** EINDREHWERKZEUG

## Catalogs

- Transpondercodierte Sicherheitssysteme mit externer Auswertung Transponder-coded safety systems with external evaluation Sistemas de seguridad con codificación por transponder y evaluación externa Systèmes de sécurité à codage par transpondeur avec analyse externe

	Doc. no.	Version	Language	Download
Transpondercodierte Sicherheitssysteme mit externer Auswertung	127596	02-01/18		 3.1 MB
Systèmes de sécurité à codage par transpondeur avec analyse externe	137968	02-01/18		 3.0 MB
Sistemas de seguridad con codificación por transponder y evaluación externa	139969	02-01/18		 3.0 MB
Transponder-coded safety systems with external evaluation	127597	02-01/18		 3.0 MB

## CAD data

CAD data for this item on TraceParts