


ITEM 106391 SPIRALLEITG M STECKVERB 3,9M-106391

Description	Technical data	Accessories	Downloads
-------------	----------------	-------------	-----------

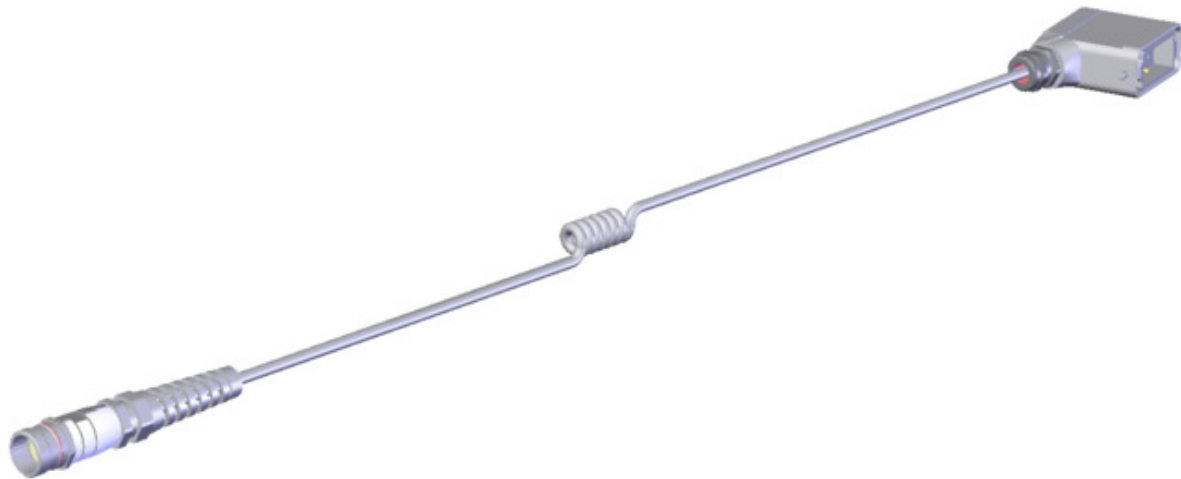

Features

- › Female plug RC17, 17-pin and male plug HAN10A, 10-pin
- › Straight plug connector
- › PUR cable
- › Coiled cable
- › Cable length 3.9 m (extended)

Mechanical values and environment

Sheath material	PUR
Drag chain suitability	No
Ambient temperature	
Dynamic	-10 ... 70 °C
static	-40 ... 80 °C
Number of conductors	12
Type of cable	coiled
Cable length	3,9 m ^[1]
Cable diameter	7,5 mm -0,3 ... +0,3
Conductor cross-section	0,14 mm ²

Conductor identification	Color code according to DIN 47100	
Sheath color		
	Cable	Matt black
Bending radius		
	static	10 x cable diameter
	Dynamic	15 x cable diameter
Connection 1		
Degree of protection	IP67 [2]	
Designation of plug connector	RC17 [3]	
Connection	Plug connector RC17	
Connection type	Socket	
Number of pins	17	
Connection 2		
Degree of protection	IP68 [4]	
Designation of plug connector	HAN10A [5]	
Connection	Plug connector HAN10A	
Connection type	Plug	
Number of pins	10	

Electrical connection ratings

Specific cable resistance	max.145 Ω/km
Cable shielding	Yes [6]

[1] Extended


[2, 4] Locked

[3] Pin 1 to 10 are wired through 1:1


[5] Cable outlet on the bush housing angled

[6] Cu thread covering, optical coverage approx. 90%

Dimension drawing

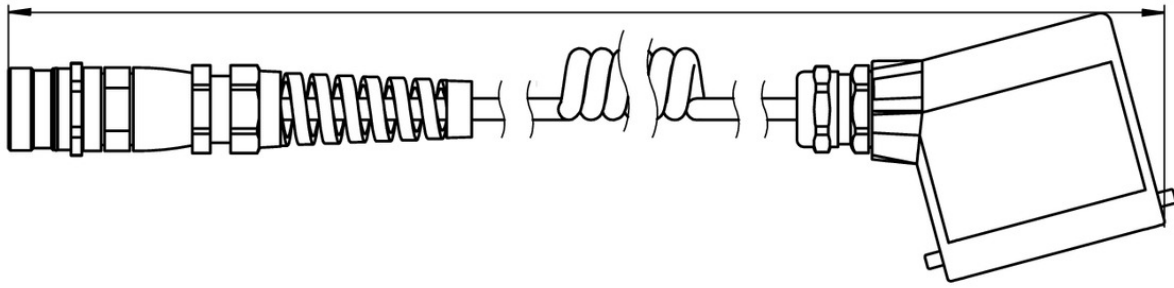

Dimension drawing

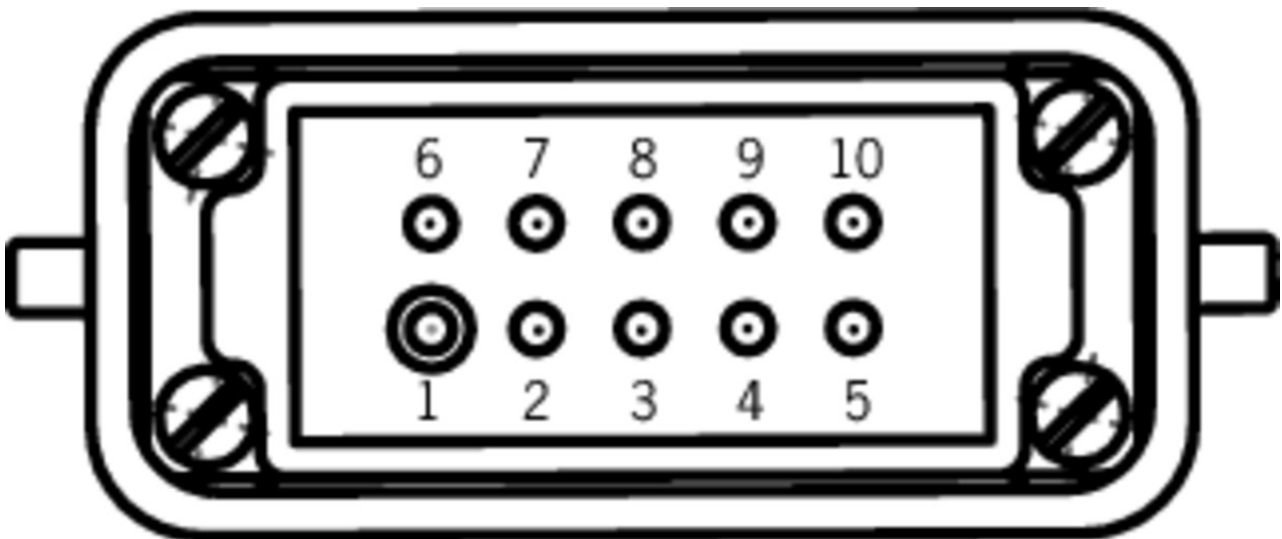

Catalogs

Enabling switches ZS Commandes d'Assentiment ZS Zustimmungstaster ZS

	Doc. no.	Version	Language	Download
Zustimmungstaster ZS	095689	08-07/18		9.1 MB
Commandes d'Assentiment ZS	097367	08-07/18		4.9 MB
Enabling switches ZS	095690	08-07/18		4.9 MB