


ITEM 106392 SPIRALLEITG M STECKVERB 9M-106392

Description	Technical data	Accessories	Downloads
-------------	----------------	-------------	-----------

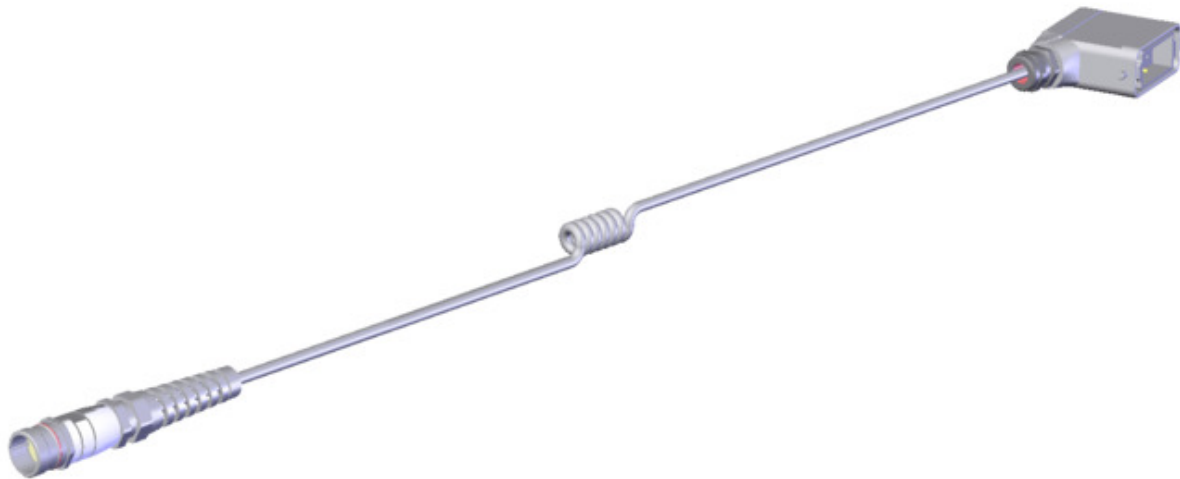

Features

- › Female plug RC17, 17-pin and male plug HAN10A, 10-pin
- › Straight plug connector
- › PUR cable
- › Coiled cable
- › Cable length 9 m (extended)

Mechanical values and environment

Sheath material	PUR
Drag chain suitability	No
Ambient temperature	
	Dynamic -10 ... 70 °C
	static -40 ... 80 °C
Number of conductors	12
Type of cable	coiled
Cable length	9,0 m ^[1]
Cable diameter	7,5 mm -0,3 ... +0,3
Conductor cross-section	0.14 mm ²

Sheath color	Cable	Matt black
Bending radius	static	10 x cable diameter
	Dynamic	15 x cable diameter
Connection 1		
Degree of protection		IP67 [2]
Designation of plug connector		RC17
Connection		Coupling plug connector
Connection type		Socket
Cable outlet		straight
Number of pins		17
Plug lock		Screw connection
Connection 2		
Degree of protection		IP68 [3]
Designation of plug connector		HAN10A
Connection		Plug connector
Connection type		Plug
Cable outlet		straight
Number of pins		10
Plug lock		Clip catch

Electrical connection ratings


Specific cable resistance	max.145 Ω/km
Cable shielding	Yes [4]

[1] Extended


[2, 3] In the locked state

[4] Cu thread covering, optical coverage approx. 90%

Dimension drawing

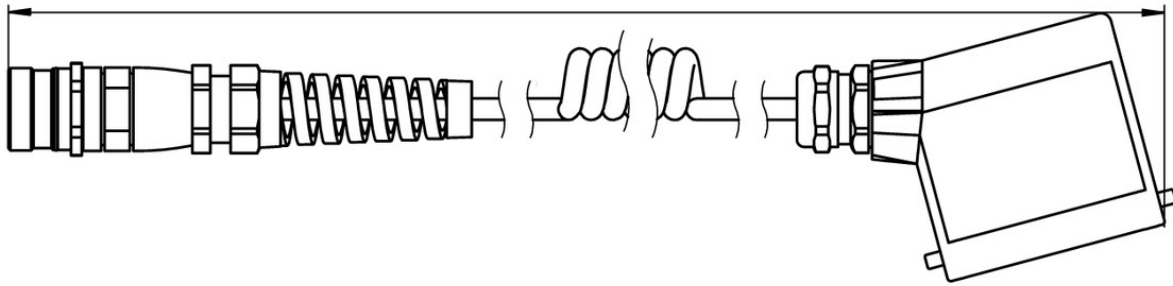


Dimension drawing

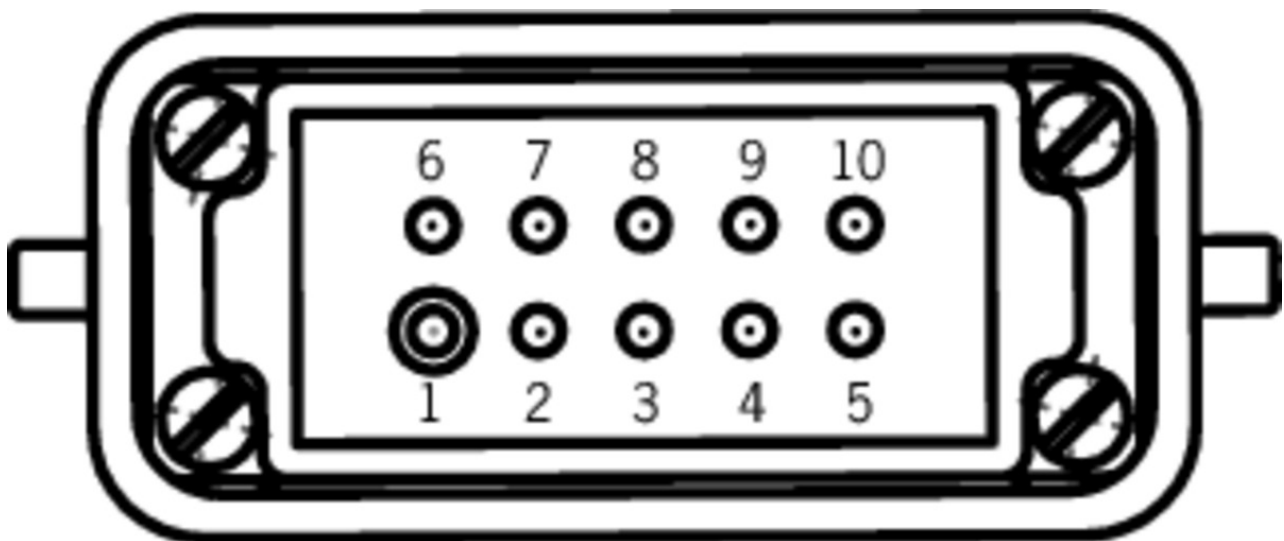

Catalogs

Enabling switches ZS Commandes d'Assentiment ZS Zustimmungstaster ZS

	Doc. no.	Version	Language	Download
Zustimmungstaster ZS	095689	08-07/18		 9.1 MB
Commandes d'Assentiment ZS	097367	08-07/18		 4.9 MB
Enabling switches ZS	095690	08-07/18		 4.9 MB