

ITEM 122369 MGB-A-TA-AR-SH-122369

Description	Technical data	Accessories	Downloads
-------------	----------------	-------------	-----------




Features

- › Teach-in adapters
- › Optional accessories for teaching-in a new handle module for safety system with M23 plug connector.

Connector assignment view X

Plug connector	Pin	Designation	Function
	2	FI1A	Enable input for channel A. For separate operation set DIP switch as per operating instructions.
	3	FI1B	Enable input for channel B. For separate operation set DIP switch as per operating instructions.
	6	UA/UB	Power supply for the guard locking solenoid (L1/L2), monitoring outputs and push button, DC 24 V must be present continuously. Power supply, DC 24 V.
	19	0V	Ground for power supply UA/UB

Connector assignment view Z

Plug connector	Pin	Designation	Function
	6	UA/UB	Power supply, DC 24 V.
	19	0V	Ground for power supply UA/UB

Approvals



Mechanical values and environment

	Connection 1
Plug lock material	CuZn, nickel-plated
Designation of plug connector	RC
Connection	Plug connector M23
Connection type	Socket
Number of pins	4 [1]
Plug lock	Screw connection
Plug housing material	CuZn, nickel-plated
	Connection 2
Plug lock material	CuZn, nickel-plated
Connection	Plug connector M23
Connection type	Plug
Number of pins	2 [2]
Plug lock	Screw connection
Plug housing material	CuZn, nickel-plated


Miscellaneous

Compatibility	For certain devices MGB-L
---------------	---------------------------

[1] 2, 3, 6, 19

[2] 6, 19

Dimension drawing

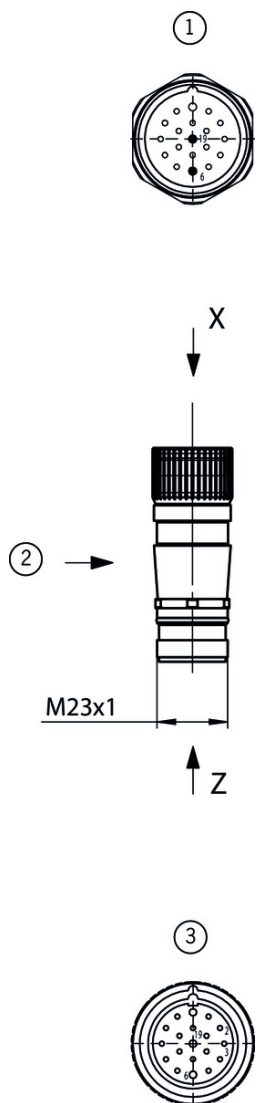

Legende

- 1 View of connection side Z
- 2 Teach-in adapter RC18 (pin)
- 3 View of connection side X