


## ITEM 115123 ANSCHLUSSLEITUNG 2M FUER ZXE-111276

Description	Technical data	Accessories	Downloads
-------------	----------------	-------------	-----------

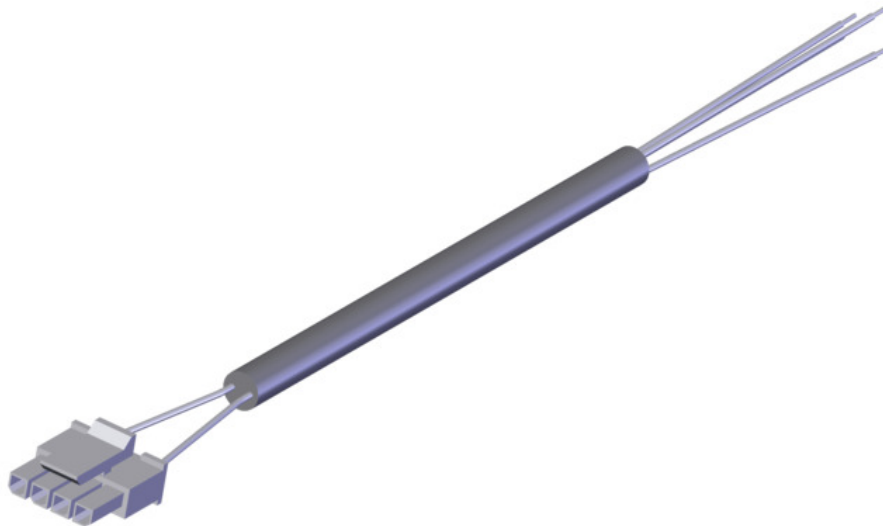

### Features


- › Connection cable for ZXE 111276
- › Plug connector Molex Microfit, 4-pin
- › PVC cable, straight
- › Cable length 2 m
- › With flying lead

### Mechanical values and environment


Sheath material	PVC
Ambient temperature	Dynamic -20 ... +105 °C static -20 ... +105 °C
Number of conductors	4
Type of cable	straight
Cable length	2,0 m
Cable diameter	4,8 mm -0,14 ... +0,14
Conductor cross-section	0.34 mm <sup>2</sup>

Sheath color	Cable	Matt black
Bending radius	static	5 x cable diameter
	Dynamic	20 x cable diameter
<b>Connection 1</b>		
Degree of protection		No
Designation of plug connector		Plug connector Molex Microfit
Connection		Plug connector
Connection type		Socket
Cable outlet		straight
Number of pins		4
Plug lock		not available
<b>Connection 2</b>		
Degree of protection		No
Conductor end		Flexible wires tinned
Connection		Flying lead
Connection type		Free
Cable outlet		straight
Number of pins		4
Plug lock		not available

## Dimension drawing

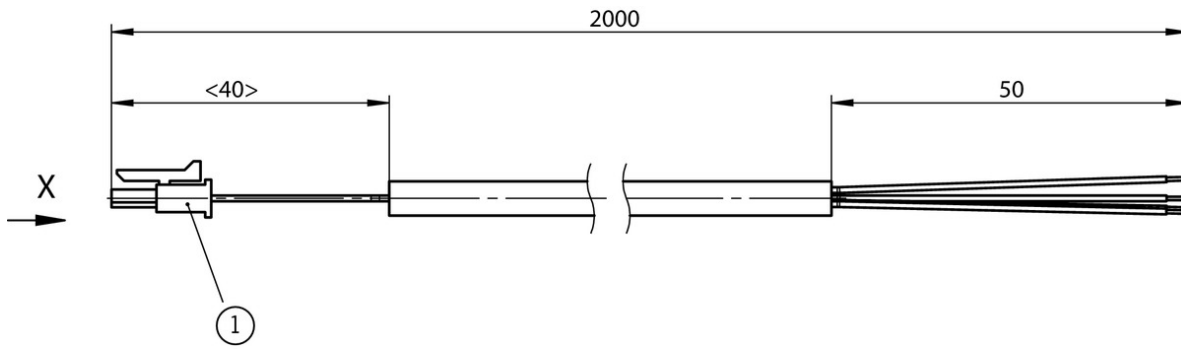

X  
2:1



②

Steckerbelegung:		
③		
Kontakt Pin	Querschnitt mm <sup>2</sup>	Adernfarbe
④	⑤	⑥
1	0,34	RD
2	0,34	BK
3	0,34	OR
4	0,34	BN

## Legende

- 1 4-pin plug connector with socket contacts
- 2 Cable: 4x0.34mm<sup>2</sup>
- 3 Connector assignment:
- 4 Contact pin
- 5 Cross-section mm<sup>2</sup>
- 6 Conductor coloring

## Catalogs

Enabling switches ZS Commandes d'Assentiment ZS Zustimmungstaster ZS

	Doc. no.	Version	Language	Download
Zustimmungstaster ZS	095689	08-07/18		9.1 MB
Commandes d'Assentiment ZS	097367	08-07/18		4.9 MB

