

## AO000528

### LED-LIGHTS • MACHINE AND BENCH LIGHTS

For any kind of inspection tasks with a camera sensor the lighting is essential, as only high-contrast images enable reproducible evaluations. Here the lighting has a decisive influence. The choice depends on different factors such as the distance to the test object, its size, the component criteria to be tested or the expected environmental conditions.



#### MECHANICAL DATA

Ambient temperature (MAX)	40 °C
Degree of protection (IP)	IP40
Front screen material	Acrylic glass
Height	20 mm
Housing design	Cuboid
Housing material	Aluminium
Length	200 mm
Width	190 mm

#### ELECTRICAL DATA

Lamp power	9.6 W
Max. current consumption	400 mA
Nominal supply voltage	24 V ... 24 V
Number of pins	4
Type of electrical connection	Connector M8
Voltage type	DC


#### OPTICAL DATA

Actual camera illumination	Yes
Color temperature	5500 K
Light source	White light
Light version	Surface area light
Radiation angle	120 °
With lamp	Yes

#### OTHER DATA

Risk groups	0
-------------	---


## CONNECTION

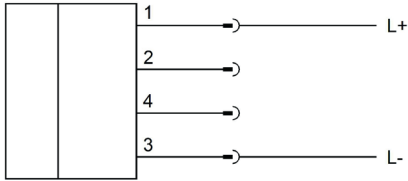

**Colors:** 1 = BN (brown), 2 = WH (white), 3 = BU (blue), 4 = BK (black)

**Functions:** 1 = L+, 2 = n. c., 3 = L-, 4 = n. c.

## DIMENSIONAL DRAWING

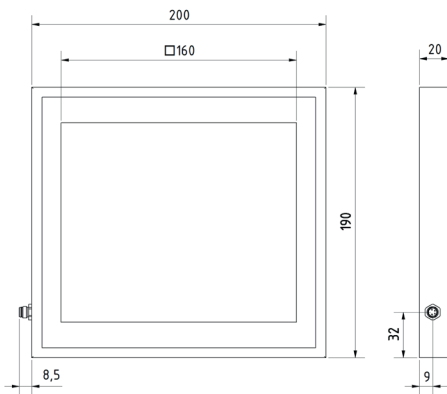

## INSTALLATION



Mounting / Installation may only be carried out by a qualified electrician!

## DISPOSAL



## SAFETY WARNINGS

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information!