


**FY98C711**

**FILLING LEVEL SENSORS • HYDROSTATIC**

Filling level and level sensors operate according to different measuring principles. The selection of the sensor depends on the medium to be detected and the ambient conditions. The material flow in a vibratory bowl can be excellently queried with inductive filling level sensors whose pendulum is moved by the material in the pot. The detection of liquid or solid media is, for instance, possible with capacitive filling level sensor technology. These work according to the principle of the condenser, the medium changes the dielectricity between two electrodes. The resulting change is converted into a digital output signal. A further alternative for the detection of filling levels of conductive media is provided by conductive filling level relays. The resistance between reference and measuring electrode is determined. If a set threshold is exceeded, a relay output switches.

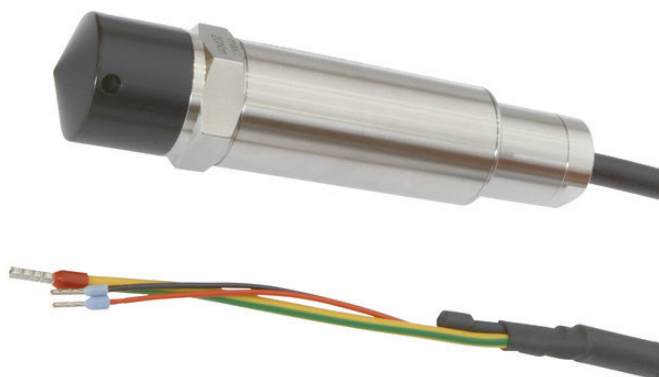

**MECHANICAL DATA**

Ambient temperature	-20 °C ... 70 °C
Degree of protection (IP)	IP68
Depth	57 mm
Height	124 mm
Housing design	Special construction
Housing material	Stainless steel 1.4404
Material of cable sheath	Other
Medium temperature	-20 °C ... 70 °C
Number of wires	3
Pressure resistance	1 bar
Probe diameter	27.5 mm
Probe length	5000 mm
Sensing element material	Stainless steel 1.4404
Sensor height	126.3 mm
Thread length	15 mm
Thread size, inches	1 inch
Type of process connection	G1 inch
Width	157 mm

**ELECTRICAL DATA**

Number of probes	1
Rated control supply voltage Us at DC	10 V ... 30 V
Type of analog output	4 mA ... 20 mA
Type of electrical connection	Clamp
Voltage drop	2 V
Voltage type for actuation	DC

**DIMENSIONAL DRAWING****INSTALLATION**

Mounting / Installation may only be carried out by a qualified electrician!

**DISPOSAL****SAFETY WARNINGS**

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information!