


KN12C606

CAPACITIVE SENSORS • ENLARGED AMBIENT TEMPERATURE

Capacitive proximity switches are contact-free sensors. They detect metallic and non-metallic objects, regardless of whether they move or not. The achievable sensing range of the devices depends on the object material, its dimensions and the response sensitivity, which is set via a potentiometer. The vibration-resistant sensors can be approached laterally or frontally. Capacitive proximity switches are used for presence detection (e.g. sealing detection), positioning (e.g. PET bottles), counting (e.g. plastic caps), level detection (e.g. lubricant) or distance measurements (e.g. thickness measurement) of solid and liquid materials.

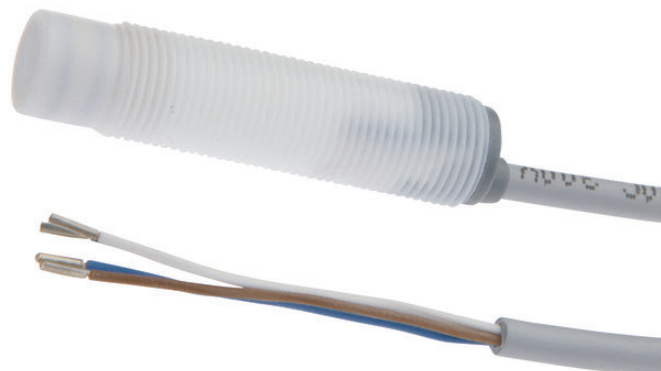

MECHANICAL DATA

Active area material of sensor	PTFE
Ambient temperature	-25 °C ... 100 °C
Cable length	2 m
Degree of protection (IP)	IP67
Housing design	Cylinder, screw-thread
Housing material	PTFE
Increased ambient temperatures > 80°C	Yes
Material of cable sheath	Silicone
Mechanical mounting condition for sensor	Non-flush
Number of wires	4
Pressure-proof	No
Sensor length	50 mm
Teflon housing	Yes
Thread pitch	1 mm
Thread size, metric	12
Wire cross section	0.14 mm ²

ELECTRICAL DATA

Cascadable	No
Max. output current	250 mA
Reverse polarity protection	Yes
Setting procedure	Manual adjustment
Short-circuit-proof	Yes
Suitable for safety functions	No
Supply voltage	10 V ... 35 V
Switching distance	4 mm
Switching distance	0.5 mm ... 10 mm
Type of electrical connection	Cable
Type of switching function	Programmable/configurable
Type of switching output	PNP
Voltage type	DC

ELECTRICAL DATA

With monitoring function of downstream devices No

OTHER DATA

Level detection	Yes
-----------------	-----

DIMENSIONAL DRAWING

INSTALLATION



Mounting / Installation may only be carried out by a qualified electrician!

DISPOSAL



SAFETY WARNINGS

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information!