

LT060180

FIBER OPTIC SENSORS • FIBER OPTICS COLOR RECOGNITION

Fiber optics in combination with the appropriate fiber optic amplifier function as contactless and wear-free position switches that can also be used in harsh environmental conditions. They detect objects independent of their characteristics (e.g., shape, color, surface structure, material). Because the ends and heads of the fiber optics have small dimensions and the fiber optics are flexible, very elegant solutions can be created for detecting objects in places that are difficult to access. Fiber optics can be used without special precautions in potentially explosive areas and in zones with electrical and/or magnetic fields (high-voltage installations, electrical welding equipment) as their function is not thereby affected. Fiber optics are available in versions for implementing the function as through-beam sensor or diffuse reflection sensor.



MECHANICAL DATA

Ambient temperature	-40 °C ... 180 °C
Bending radius (fixed)	17.6 mm
Bending radius (flexible)	17.6 mm
Ejection control	Yes
End piece diameter	6.6 mm
End piece length	8 mm
Fiber diameter	4.4 mm
Fiber optics core material	Glass
Heavy soiling	Yes
Housing design	Cylinder plain
Increased ambient temperature ≤ 180°C	Yes
Material of cable sheath	Silicone
Number of fibers	1
Overall length	600 mm
Punching tools	Yes
Sensing head diameter	2.5 mm
Sheathing material	Metal inner helix/braided glass fibers
Strong vibration / motion	Yes
Version	Diffuse reflection sensor-color sensors

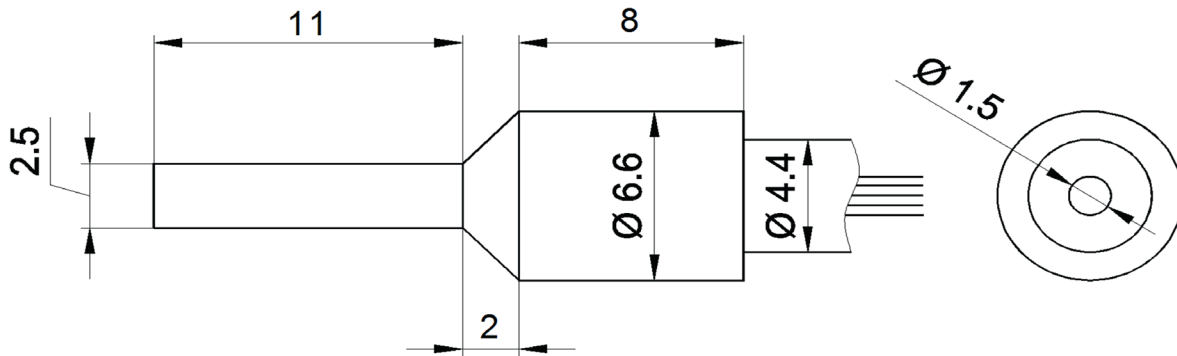
ELECTRICAL DATA

Analogue output 0 mA ... 20 mA	No
Analogue output 0 V ... 10 V	No
Analogue output -10 V ... +10 V	No
Analogue output 4 mA ... 20 mA	No
Light exit	Axial
Sensing head length	21 mm
With blanking function	Yes

OTHER DATA

Feeding technology

Yes

DIMENSIONAL DRAWING**INSTALLATION**

Mounting / Installation may only be carried out by a qualified electrician!

DISPOSAL**SAFETY WARNINGS**

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information!