


NG530002

POWER SUPPLY UNITS • SWITCHING POWER SUPPLIES 230V AC

Pulsed power supplies are used to supply electrical systems or system parts with a stabilized DC voltage. Due to the lower copper losses, pulsed power supplies in the lower power range are considerably more efficient than power transformers. Furthermore, they are more compact and are lighter weight than conventional, linear regulated power supplies, which contain a heavy transformer with iron core and cause additional losses in the linear regulator.

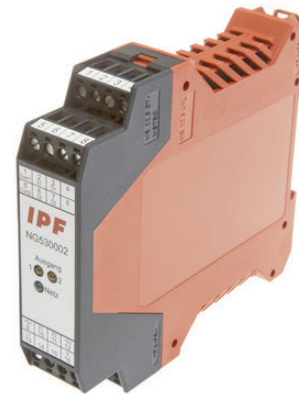

MECHANICAL DATA

Ambient temperature (MAX)	50 °C
Degree of protection (IP)	IP20
Depth	114.5 mm
Direct mounting possible	Yes
Height	99 mm
Housing material	Plastic
Rail mounting possible	Yes
Storage temperature	50 °C
Suitable for serial installation	Yes
Wall mounting possible	No
Width	22.5 mm


ELECTRICAL DATA

	Yes
1. output voltage	24 V ... 24 V
Frequency	47 Hz ... 63 Hz
Max. input current	0.05 A
Max. output current 1	0.1 A
Number of relay outputs	2
Output voltage	24 V
Output voltage, regulated	Yes
Overload protection	105 ... 160% of the output power
Power output	2.4 W
Rated supply voltage at AC 50 Hz	100 V ... 264 V
Rated supply voltage at AC 60 Hz	100 V ... 264 V
Residual ripple	1 %
Secondary voltage, adjustable	No
Suitable for safety functions	No
Type of electrical connection	Screw connection
Voltage type of supply voltage	AC
With LED display	Yes


OTHER DATA

Air humidity	90 %
Air humidity	20 %
Stabilized	Yes

CONNECTION

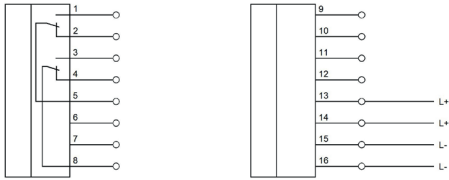

DIMENSIONAL DRAWING

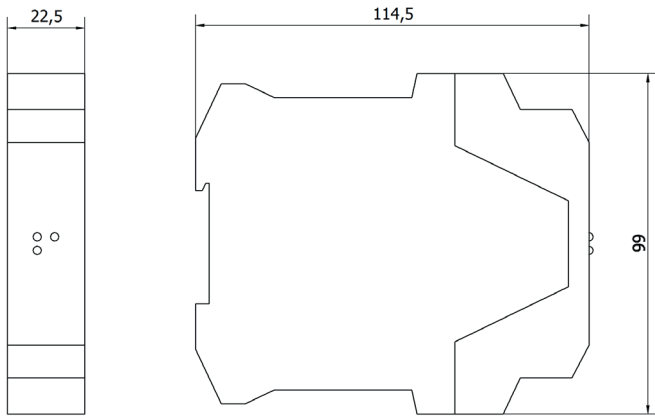

INSTALLATION



Mounting / Installation may only be carried out by a qualified electrician!

DISPOSAL



SAFETY WARNINGS

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information!