

diff. reflection sensors with background suppression

dimensions 20 x 44 x 25mm
 sensing range adjustable 120 ... 280mm
 200 ... 600mm




- ✓ solid aluminum housing
- ✓ configurable external input
- ✓ very small beam diameter
- ✓ excellent linearity
- ✓ switching output with window function
- ✓ analog output

**new: with large operating ranges
easy menu navigation, LC-display**




Technical Data	PT440303	PT440304
operating range	120 ... 280mm	200 ... 600mm
beam diameter	~300µm	~500µm
repeat accuracy	~200µm	~300µm (distance 200 ... 400mm) ~800µm (distance 400 ... 600mm)
operating voltage	12 ... 24V DC ±10%	
output current	max. 50mA	
current consumption (w/o load)	max. 40mA bei 24V DC / max. 60mA at 12V DC	
response time	switchable 1.5ms / 5ms / 10ms	
transmitting element / wavelength	laser / 655nm	
linearity	±0.2% F.S.	±0.2% F.S. (distance 200 ... 400mm) ±0.3% F.S. (distance 400 ... 600mm)
temperature dependency	0.03% of scale end value / °C	
output	pnp	
output function	NO / NC switchable	
analog output	0 ... 5V	
protection class (EN 60529)	IP67	
air humidity	35 to 85% relative air humidity	
ambient illumination	incandescent light: max 3000lx	
temperature (operating)	-10°C ... +45°C	
temperature (storage)	-20°C ... +60°C	
connection	cable 2m, 5 x 0.2mm², shielded	
material (housing)	aluminum diecast	
material (front screen)	acryl	
mounting accessories	AP000042	

connection



wire colors: 1 L+ br brown
 2 ext. input rs pink
 3 pnp no/nv bk black
 4 analog output 0-5V DC gr gray
 5 L- bl blue

dimensional drawing

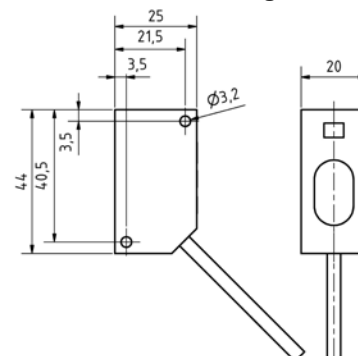

Warning: Never use these devices in applications where the safety of a person depends on their functionality.