



### Model Number


**V15-G-5M-PUR**

Female cordset, M12, 5-pin, PUR cable

### Features

- Immunity to vibration, with mechanical latching
- Knurled nut suitable for tool assembly
- Gold plated contacts
- Degree of protection IP67 / IP68 / IP69K
- Halogen-free
- Suitable for 2-, 3- and 4-wire technology

### Dimensions

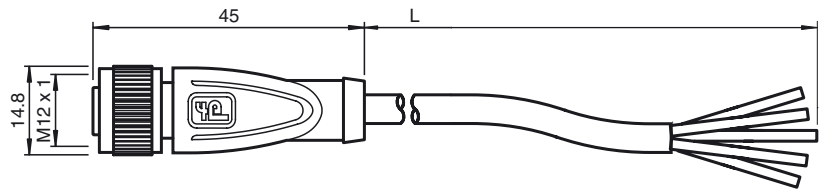

### Technical data

#### General specifications

Number of pins 5

#### Electrical specifications

Operating voltage  $U_B$  max. 60 V AC/DC  
 Operating current  $I_B$  max. 4 A  
 Volume resistance  $< 5 \text{ m}\Omega$

#### Ambient conditions

Ambient temperature Body:  $-40 \dots 90 \text{ }^\circ\text{C}$  ( $-40 \dots 194 \text{ }^\circ\text{F}$ )  
 cable, fixed:  $-40 \dots 80 \text{ }^\circ\text{C}$  ( $-40 \dots 176 \text{ }^\circ\text{F}$ )  
 cable, flexing:  $-30 \dots 80 \text{ }^\circ\text{C}$  ( $-22 \dots 176 \text{ }^\circ\text{F}$ )

Pollution degree 3

#### Mechanical specifications

Contact elements spring-loaded contact socket  
 Pin diameter 1 mm  
 Degree of protection IP67 / IP68 / IP69k

#### Material

Contacts CuSn / Au  
 Contact surface Au  
 Body TPU, black  
 Cable PUR  
 Slotted nut Diecast zinc  
 Core insulation PP

Cable fine-strand, flexible

Sheath diameter  $\text{\O} 4.8 \text{ mm}$   
 Bending radius  $> 10 \times$  cable diameter, moving  
 $> 8 \times$  cable diameter, flexible

Color grey  
 Number of cores 5  
 Core cross-section  $0.34 \text{ mm}^2$   
 Conductor construction  $19 \times 0.15 \text{ mm } \text{\O}$

Length L 5 m

Flammability  
 Contact carrier HB  
 Housing V-2

#### Compliance with standards and directives

Standard conformity  
 Degree of protection EN 60529:2000  
 Standards IEC 61076-2-101:2008 with test voltage 500 V<sub>DC</sub>  
 Flammability Grip: UL 94

### Electrical connection

