



Model Number


USBA-2M-PUR-V34-G

Connection cable, USB to 4-pin M9, PUR cable

Features

- USB 2.0
- Suitable for 12 MBit/s (full speed)
- Redundant shielding

Dimensions

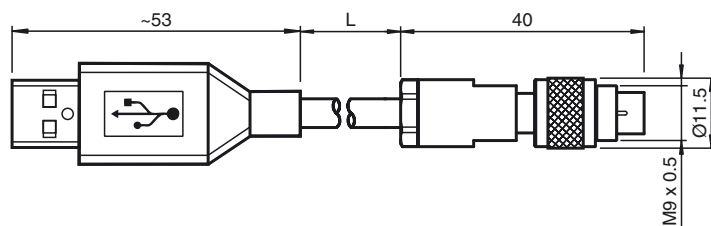

Technical data

General specifications

Number of pins 4

Electrical specifications

Operating voltage U_B max. 30 V DC
 Operating current I_B max. 100 mA


Ambient conditions

Ambient temperature -40 ... 80 °C (-40 ... 176 °F)

Mechanical specifications

Material	
Cable	PUR
Slotted nut	CuZn, nickel-plated
Cable	
Sheath diameter	Ø 4.5 mm
Color	grey
Cores	0.081 mm ² (28 AWG) 2 x 0.125 mm ² (AWG26)
Shield	Foil Around data leads, braided shield around entire cable
Length	L 2 m
Mass	approx. 73 g

Electrical connection

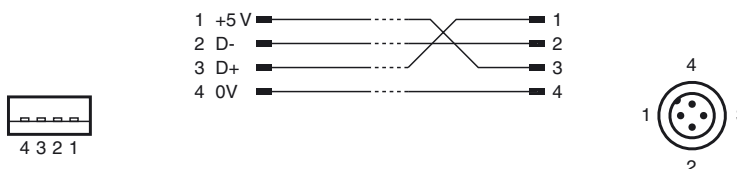

Release date: 2015-06-24 12:01 Date of issue: 2015-06-24 204957_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".