

**Features**

- 1-channel isolated barrier
- 24 V DC supply (Power Rail)
- Output 70 mA at 12.5 V DC
- Logic input, non-polarized
- Fault indication output
- Line fault detection (LFD)
- Up to SIL 2 acc. to IEC 61508

**Function**

This isolated barrier is used for intrinsic safety applications. The device supplies power to solenoids, LEDs and audible alarms located in a hazardous area.

It is controlled via a logic signal. The input has two defined states: 1-Signal = 16 V DC ... 30 V DC, 0-Signal = 0 V DC ... 5 V DC. The current consumption of the input is about 3 mA.


At full load, 12.5 V at 70 mA is available for the hazardous area application.

If the field impedance is > 10 kΩ for lead breakage or < 50 Ω for short circuits a line fault is detected.


During an error condition, the fault indication output de-energizes.

A fault is signaled by LEDs and a separate collective error message output.

**Assembly**

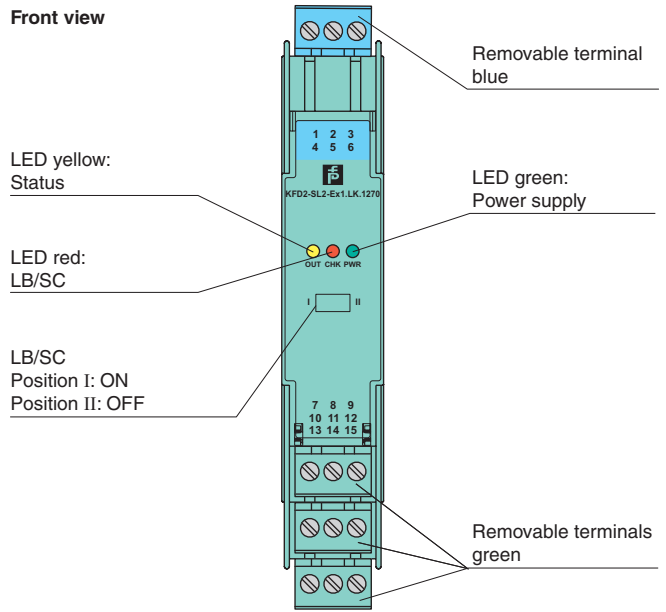

**Connection**

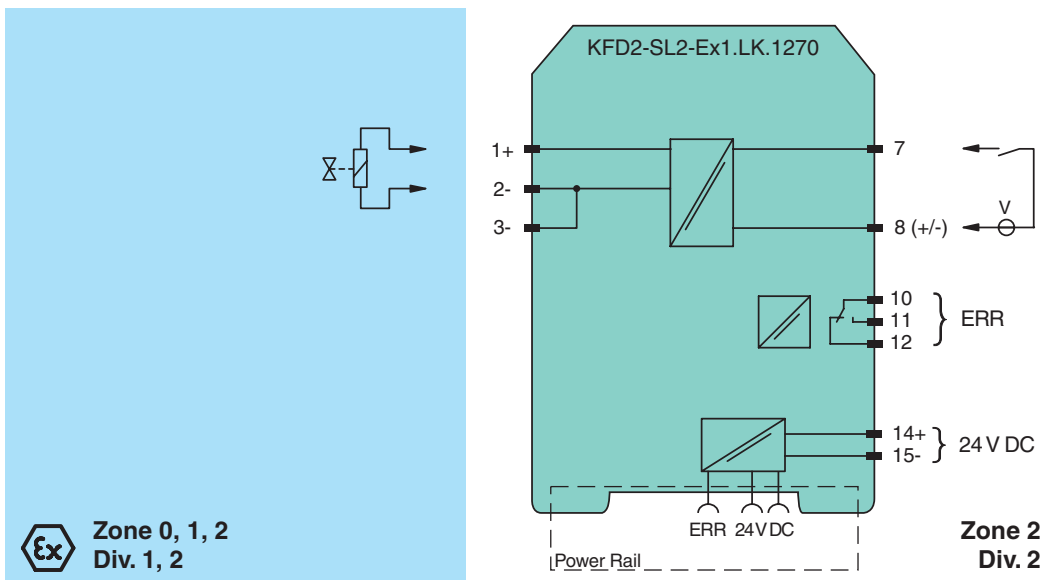

Release date 2019-01-25 09:38 Date of issue 2019-01-25 213130\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

|  |       |  |
|--|-------|--|
| <b>General specifications</b>                                  |       |  |
| Signal type  |       | Digital Output   |
| <b>Functional safety related parameters</b>                    |       |  |
| Safety Integrity Level (SIL)                                   |       | SIL 2  |
| <b>Supply</b>  |       |  |
| Connection   |       | Power Rail or terminals 14+, 15-   |
| Rated voltage  | $U_r$ | 19 ... 30 V DC   |
| Power dissipation  |       | max. 1.4 W   |
| Power consumption  |       | ≤ 2.3 W at 70 mA output current  |
| <b>Input</b>   |       |  |
| Connection side  |       | control side   |
| Connection   |       | terminals 7, 8   |
| Input current  |       | approx. 3 mA   |
| Signal level   |       | 1-signal: 16 ... 30 V DC<br>0-signal: 0 ... 5 V DC   |
| <b>Output</b>  |       |  |
| Connection side  |       | field side   |
| <b>Output I</b>  |       |  |
| Connection   |       | terminals 1+, 2- or 3-   |
| Internal resistor  | $R_i$ | 92 Ω   |
| Current  | $I_e$ | ≤ 70 mA  |
| Voltage  | $U_e$ | ≥ 12.5 V   |
| Open loop voltage  | $U_s$ | ≥ 19.2 V   |
| Output signal  |       | These values are valid for the rated operating voltage 19 ... 30 V DC.   |
| Energized/De-energized delay                                   |       | ≤ 20 ms / ≤ 20 ms  |
| Line fault detection   |       | signal at short-circuit $R_B < 50 \Omega$ , lead breakage $R_B > 10 \text{ k}\Omega$ ; test current < 650 μA   |
| <b>Output II</b>   |       |  |
| Connection   |       | terminals 10, 11, 12, non-intrinsically safe   |
| Contact loading  |       | 253 V AC/2 A/cos φ > 0.7; 40 V DC/2 A resistive load   |
| Mechanical life  |       | 2 x 10 <sup>7</sup> switching cycles   |
| Energized/De-energized delay                                   |       | ≤ 20 ms / ≤ 20 ms  |
| <b>Galvanic isolation</b>                                      |       |  |
| Input/power supply   |       | basic insulation according to IEC/EN 61010-1, rated insulation voltage 50 V <sub>eff</sub>   |
| Output I, II against each other                                |       | reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V <sub>eff</sub>   |
| Output II/power supply   |       | reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V <sub>eff</sub>   |
| <b>Indicators/settings</b>                                     |       |  |
| Display elements   |       | LEDs   |
| Control elements   |       | DIP-switch   |
| Configuration  |       | via DIP switches   |
| Labeling   |       | space for labeling at the front  |
| <b>Directive conformity</b>                                    |       |  |
| <b>Electromagnetic compatibility</b>                           |       |  |
| Directive 2014/30/EU   |       | EN 61326-1:2013 (industrial locations)   |
| <b>Low voltage</b>   |       |  |
| Directive 2014/35/EU   |       | EN 61010-1:2010  |
| <b>Conformity</b>  |       |  |
| Electromagnetic compatibility                                  |       | NE 21:2007   |
| Degree of protection   |       | IEC 60529:2001   |
| <b>Ambient conditions</b>                                      |       |  |
| Ambient temperature  |       | -20 ... 60 °C (-4 ... 140 °F)  |
| <b>Mechanical specifications</b>                               |       |  |
| Degree of protection   |       | IP20   |
| Connection   |       | screw terminals  |
| Mass   |       | approx. 150 g  |
| Dimensions   |       | 20 x 119 x 115 mm (0.8 x 4.7 x 4.5 inch), housing type B2  |
| Mounting   |       | on 35 mm DIN mounting rail acc. to EN 60715:2001   |
| <b>Data for application in connection with hazardous areas</b> |       |  |
| <b>EU-Type Examination Certificate</b>                         |       |  |
| Marking  |       | ZELM 99 ATEX 0015<br><br><br> |
| Output I   |       | Ex ia  |
| Voltage  | $U_o$ | 22.1 V   |
| Current  | $I_o$ | 248 mA   |


Release date 2019-01-25 09:38 Date of issue 2019-01-25 213130\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".


|                                 |       |   |
|---------------------------------|-------|---|
| Power                           | $P_o$ | 1.38 W (linear characteristic)  |
| <b>Supply</b>                   |       |   |
| Maximum safe voltage            | $U_m$ | 40 V (Attention! The rated voltage can be lower.)   |
| <b>Input</b>                    |       |   |
| Maximum safe voltage            | $U_m$ | 60 V (Attention! The rated voltage can be lower.)   |
| <b>Collective error message</b> |       |   |
| Maximum safe voltage            | $U_m$ | 40 V (Attention! The rated voltage can be lower.)   |
| <b>Certificate</b>              |       |   |
| Marking                         |       | TÜV 02 ATEX 1820 X  |
|                                 |       | ⊕ II 3G Ex nA nC IIC T4 Gc  |
| <b>Output II</b>                |       |   |
| Contact loading                 |       | 50 V AC/2 A/cos $\phi > 0.7$ ; 40 V DC/2 A resistive load   |
| <b>Galvanic isolation</b>       |       |   |
| Output I/other circuits         |       | safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V   |
| <b>Directive conformity</b>     |       |   |
| Directive 2014/34/EU            |       | EN 60079-0:2012+A11:2013 , EN 60079-11:2012 , EN 60079-15:2010 , EN 60079-26:2007 , EN 50303:2000   |
| <b>International approvals</b>  |       |   |
| <b>CSA approval</b>             |       |   |
| Control drawing                 |       | 116-0362  |
| <b>IECEX approval</b>           |       |   |
| IECEX certificate               |       | IECEX ZLM 14.0001   |
| IECEX marking                   |       | [Ex ia Ga] IIC, [Ex ia Da] IIIC, [Ex ia Ma] I   |
| <b>General information</b>      |       |   |
| Supplementary information       |       | Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> . |
| <b>Accessories</b>              |       |   |
| Optional accessories            |       | - power feed module KFD2-EB2(.R4A.B)(.SP)<br>- universal power rail UPR-03(-M)(-S)<br>- profile rail K-DUCT-BU(-UPR-03)   |

**Output characteristics**

Output circuit diagram



Output characteristic

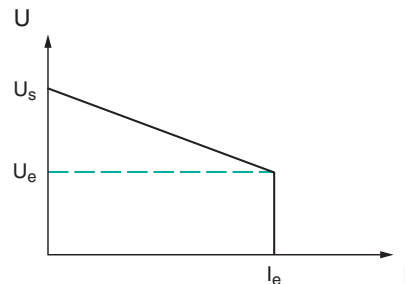

Release date 2019-01-25 09:38 Date of issue 2019-01-25 213130\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".