

Features

- Standard enclosure for FB-System
- Max. 5 slots for I/O modules
- For FOUNDATION Fieldbus H1
- Impact resistance enclosure, IP66/NEMA 4X
- Packaged certified solution
- Installation in Zone 1

Function


This field unit is designed to meet the requirements of the most demanding hazardous area and industrial environmental applications.

Glass fiber-reinforced polyester provides corrosion resistance. It is easy to modify and light weight. The surface resistance avoids electrostatic charge.


It is equipped with plug-in slots for 5 dual width I/O modules.

Any I/O module can be inserted into any slot, enabling a mixture of I/O types in one field unit.

Assembly

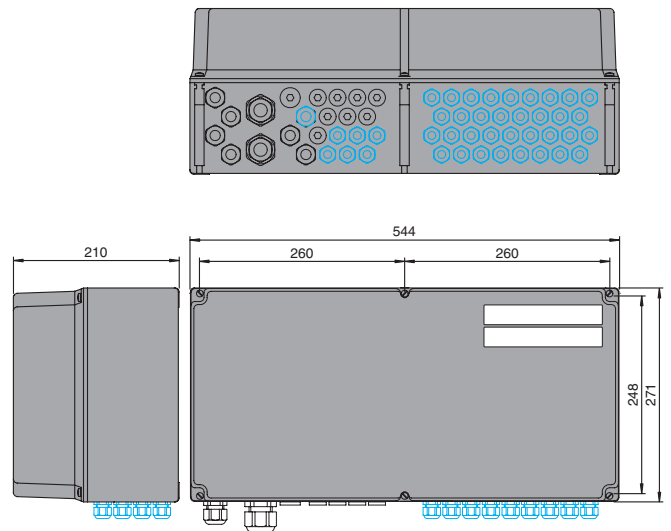

Connection

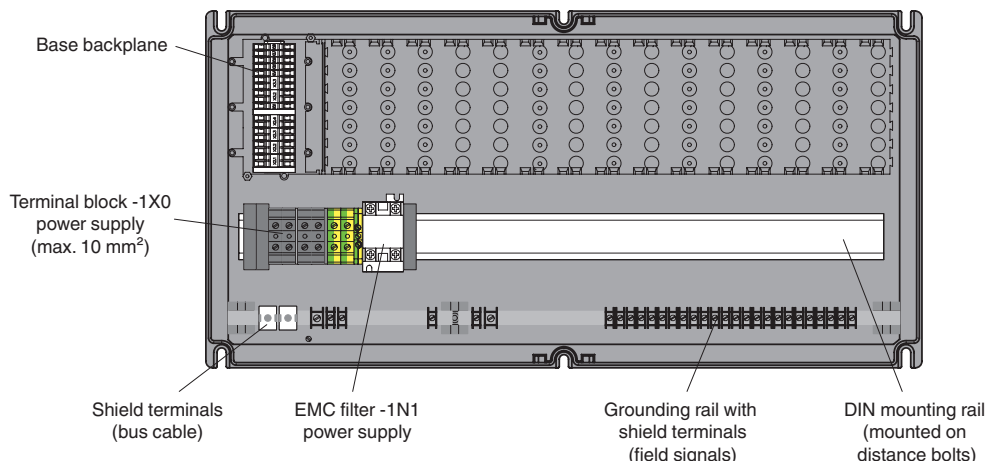

Drawn without cover and cable glands!

Release date 2017-10-23 11:27 Date of issue 2017-10-23 213225_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

Slots	
Bus coupler	1
Bus termination	1
Supply	1
I/O modules (single width)	-
I/O modules (dual width)	max. 5
Supply	
Connection	screw terminals, max. 10 mm ²
Rated voltage U_r	24 V DC/115 V AC/230 V AC , depends on power supply
Redundancy	no
Fieldbus interface	
Fieldbus type	FOUNDATION Fieldbus H1
Connection	spring terminal, max. 2.5 mm ²
Redundancy	no
Directive conformity	
Electromagnetic compatibility	
Directive 2014/30/EU	EN 61326-1
Conformity	
Degree of protection	EN 60529
Impact resistance	EN 60079-0
Ambient conditions	
Ambient temperature	-20 ... 40 °C (-4 ... 104 °F) higher temperature range possible by individual assessment of the module assembly
Storage temperature	-25 ... 70 °C (-13 ... 158 °F)
Relative humidity	< 75 % (annual mean) < 95 % (30 d/year), no moisture condensation
Shock resistance	shock type I, shock duration 11 ms, shock amplitude 15 g, number of shocks 18
Vibration resistance	frequency range 10 ... 150 Hz; transition frequency: 57.56 Hz, amplitude/acceleration \pm 0.075 mm/1 g; 10 cycles frequency range 5 ... 100 Hz; transition frequency: 13.2 Hz amplitude/acceleration \pm 1 mm/0.7 g; 90 minutes at each resonance
Impact resistance	7J
Mechanical specifications	
Enclosure cover	detachable cover with retaining screws
Degree of protection	IP66, NEMA 4X
Cable entry	power supply (Ex e): 2 x M25 system (Ex e): 3 x M20 and 1 x stopping plug bus (Ex e): 4 x M20 field signals (Ex i): 40 x M16 and 8 x stopping plugs
Material	
Housing	polyester , impact resistant, glass fiber reinforced
Surface	black molded finish (RAL 9005)
Cable gland	Polyamide (PA)
Seal	- housing: silicon, one piece - cable glands: polychloroprene nitril rubber CR/NBR
Material thickness	enclosure body: 4 mm enclosure cover: 3 mm
Mass	approx. 10 kg , without modules
Dimensions	(W x H x D) 544 x 271 x 210 mm (21.4 x 10.7 x 8.3 inch)
Mounting	thru-holes \varnothing 6.5 mm
Data for application in connection with hazardous areas	
EU-Type Examination Certificate	PTB 97 ATEX 1075 X
Marking	Ex II 2(1)G Ex d e mb [ia Ga/ib] IIC T4 Gb Ex II 2(1)D Ex tb [ia Da/ib] IIIC T130°C Db
Directive conformity	
Directive 2014/34/EU	EN 60079-0:2012+A11:2013 , EN 60079-1:2007 , EN 60079-7:2007 , EN 60079-11:2012 , EN 60079-18:2009 , EN 60079-31:2014
International approvals	
INMETRO	TÜV 13.1140
Marine approval	
Lloyd Register	15/20021
DNV GL Marine	TAA0000034
American Bureau of Shipping	T1450280/UN
General information	

Release date 2017-10-23 11:27 Date of issue 2017-10-23 213225_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

Supplementary information	EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see www.pepperl-fuchs.com .
---------------------------	--

Release date 2017-10-23 11:27 Date of issue 2017-10-23 213225_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com