




Model Number

NBN8-12GM50-E2-0,2M-V3

Features

- 8 mm not embeddable
- Increased operating distance
- Pigtail quick disconnect

Connection



Pinout




Wire colors in accordance with EN 60947-5-2

1	BN
3	BU
4	BK

Accessories

BF 12
Mounting flange, 12 mm

Dimensions

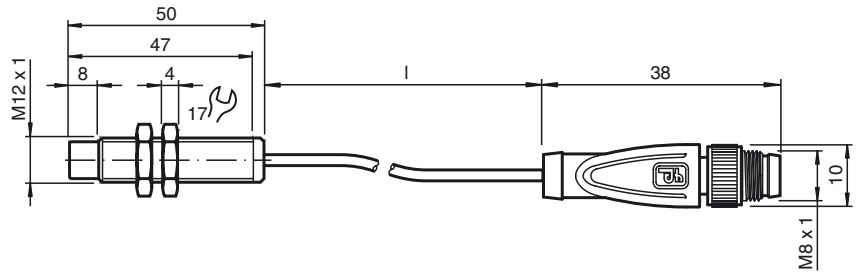

Technical Data

General specifications

Switching element function	PNP	NO
Rated operating distance	s_n	8 mm
Installation	not embeddable	
Output polarity	DC	
Assured operating distance	s_a	0 ... 6.48 mm
Reduction factor r_{Al}	0.39	
Reduction factor r_{Cu}	0.3	
Reduction factor r_{V2A}	0.7	
Reduction factor r_{Brass}	0.45	

Nominal ratings

Operating voltage	U_B	10 ... 30 V
Switching frequency	f	0 ... 1500 Hz
Hysteresis	H	typ. 5%
Reverse polarity protected	reverse polarity protected	
Short-circuit protection	pulsing	
Voltage drop	U_d	≤ 3 V
Operating current	I_L	0 ... 200 mA
No-load supply current	I_0	≤ 16 mA
Indication of the switching state	all direction LED, yellow	

Functional safety related parameters

MTTF _d	1560 a
Mission Time (T _M)	20 a
Diagnostic Coverage (DC)	0 %

Ambient conditions

Ambient temperature	-25 ... 70 °C (-13 ... 158 °F)
---------------------	--------------------------------

Mechanical specifications

Connection type	Cable connector M8 x 1 , PVC , 200 mm
Core cross-section	0.14 mm ²
Housing material	brass, nickel-plated
Sensing face	PBT
Protection degree	IP67

Compliance with standards and directives

Standard conformity	
Standards	EN 60947-5-2:2007 IEC 60947-5-2:2007

Approvals and certificates

UL approval	cULus Listed, General Purpose
CSA approval	cCSAus Listed, General Purpose
CCC approval	Products with a maximum operating voltage of ≤ 36 V do not bear a CCC marking because they do not require approval.

Release date: 2010-11-16 13:51 Date of issue: 2010-11-17 22:5165_ENG.xml