




Dimensions

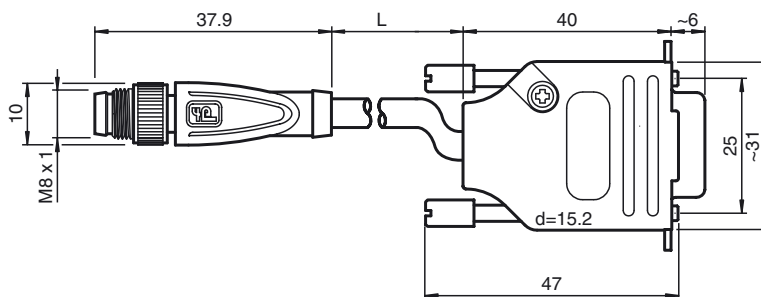

Model Number

V3S-GM-0,15M-PUR-ABG-SUBD
 Adapter M8 on Sub-D for PC connection with null modem cable

Features

- EMC shielded

Accessories

IVZ-K-R2
 Null modem cable

Technical data


General specifications

Number of pins	3
Construction type	M8 connector, straight 9-pin Sub-D connector (pin)

Mechanical specifications

Material	
Body	TPU, black
Cable	PUR
Sleeve connector	Diecast zinc
Core insulation	PP
Cable	
Cable	fine-strand, flexible
Sheath diameter	Ø4.8 mm
Bending radius	> 10 x cable diameter, moving 5 x cable diameter, single bend
Color	
Color	grey
Cores	
Cores	4 x 0.34 mm ² 1 x shield positioned over M8 connector and Sub-D housing
Conductor construction	
Conductor construction	19 x 0.15 mm Ø
Shield	
Shield	grid covering 85 %
Length	L 0.15 m

Electrical connection

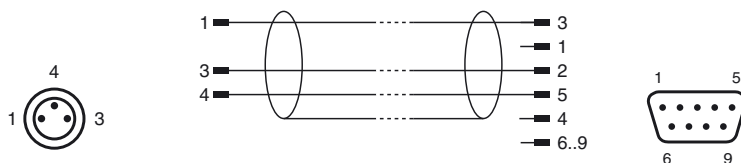

Release date: 2014-03-25 14:55 Date of issue: 2014-03-25 228636_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
 www.pepperl-fuchs.com

USA: +1 330 486 0001
 fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 4411
 fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
 fa-info@sg.pepperl-fuchs.com