

Features

- 1-channel isolated barrier
- 24 V DC supply (Power Rail)
- Input 2-wire and 3-wire SMART transmitters and 2-wire SMART current sources
- Output 0/1 V ... 5 V
- Terminals with test points
- Up to SIL 2 acc. to IEC 61508


Function

This isolated barrier is used for intrinsic safety applications. The device supplies 2-wire and 3-wire SMART transmitters, and can also be used with 2-wire SMART current sources. It transfers the analog input signal to the safe area as an isolated current value. Digital signals may be superimposed on the input signal in the hazardous or non-hazardous area and are transferred bi-directionally. If the HART communication resistance in the loop is too low, the internal resistance can be used. Test sockets for the connection of HART communicators are integrated into the terminals of the device.


Application

- The device supports the following SMART protocols:
- HART
 - BRAIN
 - Foxboro

Assembly

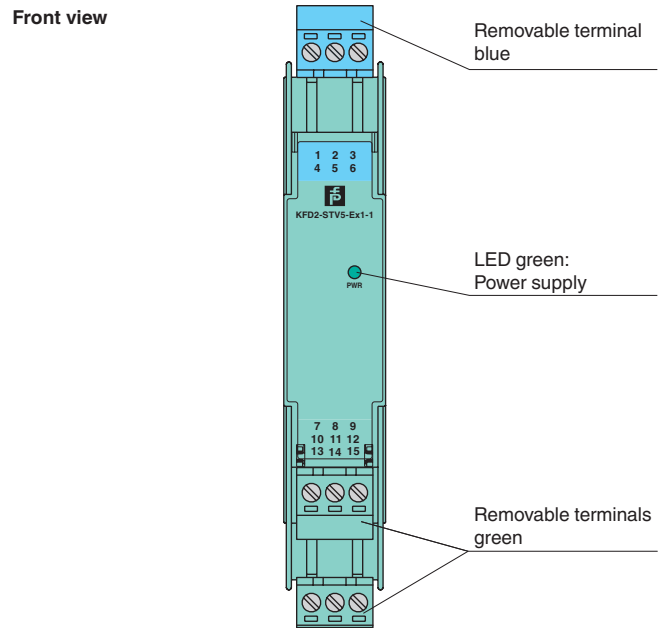

Connection

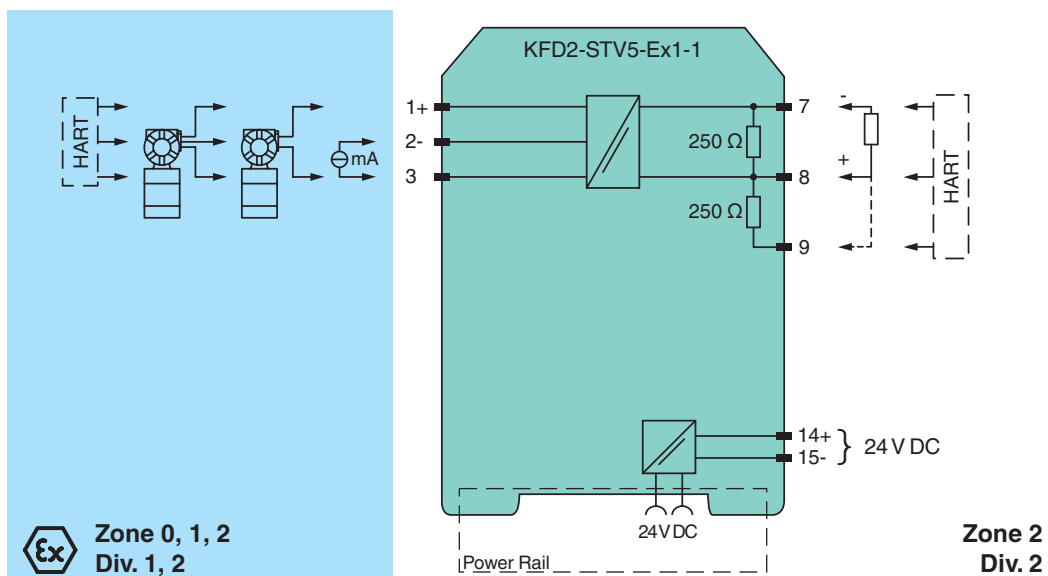

Release date 2018-10-09 15:39 Date of issue 2018-10-09 239211_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

General specifications		
Signal type		Analog input
Functional safety related parameters		
Safety Integrity Level (SIL)		SIL 2
Supply		
Connection		Power Rail or terminals 14+, 15-
Rated voltage	U_r	18 ... 30 V DC
Ripple		within the supply tolerance
Power dissipation		≤ 1 W at maximum load
Power consumption		≤ 1.6 W at maximum load
Input		
Connection side		field side
Connection		terminals 1+, 2-, 3
Input signal		0/4 ... 20 mA
Input resistance		≤ 265 Ω terminals 2-, 3 , ≤ 330 Ω terminals 1+, 3
Available voltage		≥ 16 V at 20 mA , terminals 1+, 3
Output		
Connection side		control side
Connection		terminals 7-, 8+, 9+
Output signal		0/1 ... 5 V
Ripple		≤ 12.5 mV
Output resistance		250 Ω
Transfer characteristics		
Deviation		at 20 °C (68 °F) ≤ 5 mV incl. calibration, linearity, hysteresis, loads and fluctuations of supply voltage
Influence of ambient temperature		≤ 20 ppm/K
Frequency range		field side into the control side: bandwidth with 0.5 V _{pp} signal 0 ... 7.5 kHz (-3 dB) control side into the field side: bandwidth with 0.5 V _{pp} signal 0.3 ... 7.5 kHz (-3 dB)
Settling time		200 μs
Rise time/fall time		100 μs
Galvanic isolation		
Input/Output		safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
Input/power supply		safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
Output/power supply		functional insulation, rated insulation voltage 50 V AC
Indicators/settings		
Display elements		LED
Labeling		space for labeling at the front
Directive conformity		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013 (industrial locations)
Conformity		
Electromagnetic compatibility		
		NE 21:2012 EN 61326-3-2:2008
Degree of protection		IEC 60529:2001
Protection against electrical shock		UL 61010-1:2012
Ambient conditions		
Ambient temperature		-20 ... 60 °C (-4 ... 140 °F)
Mechanical specifications		
Degree of protection		IP20
Connection		screw terminals
Mass		approx. 150 g
Dimensions		20 x 124 x 115 mm (0.8 x 4.9 x 4.5 inch) , housing type B2
Mounting		on 35 mm DIN mounting rail acc. to EN 60715:2001
Data for application in connection with hazardous areas		
EU-Type Examination Certificate		
Marking		CML 17 ATEX 2029X ⊕ Ex II (1)G [Ex ia Ga] IIC ⊕ Ex II (1)D [Ex ia Da] IIIC ⊕ Ex I (M1) [Ex ia Ma] I
Input		[Ex ia Ga] IIC, [Ex ia Da] IIIC, [Ex ia Ma] I
Supply		
Maximum safe voltage	U_m	250 V (Attention! The rated voltage can be lower.)
Equipment		
Voltage	U_o	26.2 V
Voltage	U_q	27.25 V

Release date 2018-10-09 15:39 Date of issue 2018-10-09 239211_eng.xml

Current	I_o	93 mA
Power	P_o	634 mW
Permissible connection values [EEx ia]		
Equipment		
Voltage	U_i	30 V
Current	I_i	115 mA
Power	P_i	max 1 W
Voltage	U_o	2 V
Current	I_o	8.5 mA
Power	P_o	4.3 mW
Permissible connection values [EEx ia]		
Equipment		
Voltage	U_o	26.2 V
Voltage	U_q	27.25 V
Current	I_o	115 mA
Power	P_o	784 mW
Certificate		
CML 17 ATEX 3028X		
Marking		
⊕ II 3G Ex ec IIC T4 Gc		
Galvanic isolation		
Input/Output		
safe electrical isolation acc. to IEC/EN 60079-11:2012, voltage peak value 375 V		
Input/power supply		
safe electrical isolation acc. to IEC/EN 60079-11:2012, voltage peak value 375 V		
Directive conformity		
Directive 2014/34/EU		
EN 60079-0:2012+A11:2013 , EN 60079-11:2012 , EN 60079-7:2015		
International approvals		
UL approval		
Control drawing		
116-0439 (cULus)		
IECEX approval		
IECEX CML 17.0015X		
Approved for		
[Ex ia Ga] IIC , [Ex ia Da] IIIC , [Ex ia Ma] I , Ex ec IIC T4 Gc		
General information		
Supplementary information		
Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com .		
Accessories		
Optional accessories		
- power feed module KFD2-EB2(.R4A.B)(.SP) - universal power rail UPR-03(-M)(-S) - profile rail K-DUCT-BU(-UPR-03)		

Release date 2018-10-09 15:39 Date of issue 2018-10-09 239211_eng.xml