

## Features

- 2-channel signal conditioner
- 24 V DC supply (loop powered)
- Logic input 15 V DC ... 30 V DC, non-polarized
- Relay contact output
- Up to SIL 3 acc. to IEC 61508

## Function


This signal conditioner provides the galvanic isolation between field circuits and control circuits.

The device switches circuits on the field side. Typical applications for the use of the device are remote reset, fire alarm testing or remote calibration of strain gauges.

The outputs are galvanically isolated to the inputs. The inputs are not polarized and share a common reference potential.


Each input of the device is protected by a fuse and an electronic current limiting.

## Assembly

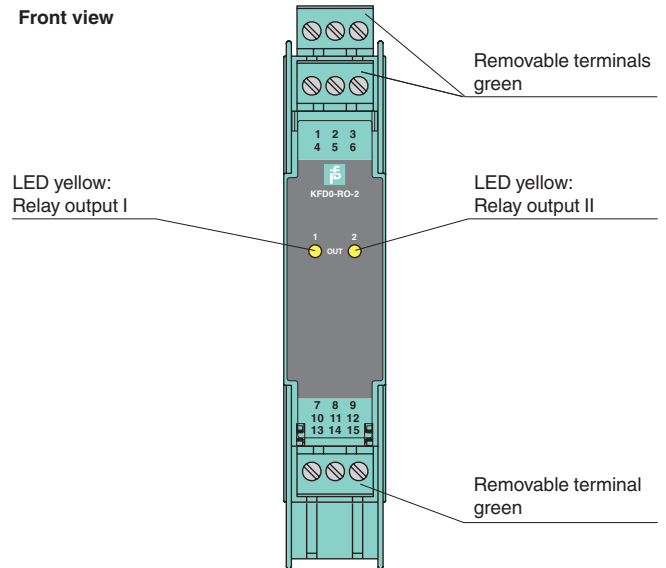


CE

## Connection

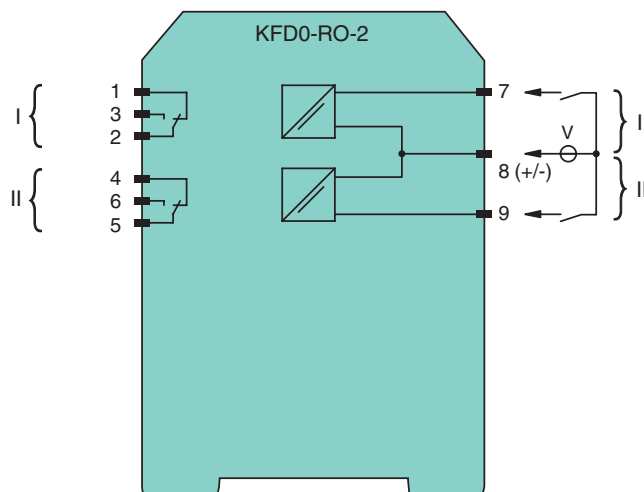

<b>General specifications</b>	
Signal type	Digital Output
<b>Functional safety related parameters</b>	
Safety Integrity Level (SIL)	SIL 3
<b>Supply</b>	
Rated voltage $U_r$	loop powered
Power dissipation	0.8 W
<b>Input</b>	
Connection side	control side
Connection	terminals 7, 8, 9
Input voltage	15 ... 30 V DC
Input current	$\leq 21$ mA per channel
<b>Output</b>	
Connection side	field side
Connection	terminals 1, 2, 3; 4, 5, 6
Contact loading	230 V AC/4 A/cos $\phi > 0.7$ ; 30 V DC/4 A resistive load
Energized/De-energized delay	approx. 10 ms / approx. 5 ms
Mechanical life	$5 \times 10^6$ switching cycles
Electrical life	$10^5$ switching cycles , at maximum load
<b>Transfer characteristics</b>	
Switching frequency	$< 10$ Hz
<b>Galvanic isolation</b>	
Input/Output	reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V <sub>eff</sub>
Output/Output	basic insulation according to IEC/EN 61010-1, rated insulation voltage 300 V <sub>eff</sub>
<b>Indicators/settings</b>	
Display elements	LEDs
Labeling	space for labeling at the front
<b>Directive conformity</b>	
Electromagnetic compatibility	
Directive 2014/30/EU	EN 61326-1:2013 (industrial locations)
Low voltage	
Directive 2014/35/EU	EN 61010-1:2010
<b>Conformity</b>	
Electromagnetic compatibility	NE 21:2006
Degree of protection	IEC 60529:2001
<b>Ambient conditions</b>	
Ambient temperature	-20 ... 65 °C (-4 ... 149 °F)
<b>Mechanical specifications</b>	
Degree of protection	IP20
Connection	screw terminals
Mass	approx. 100 g
Dimensions	20 x 119 x 115 mm (0.8 x 4.7 x 4.5 inch) , housing type B2
Mounting	on 35 mm DIN mounting rail acc. to EN 60715:2001
<b>General information</b>	
Supplementary information	Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .

## Maximum switching power of output contacts

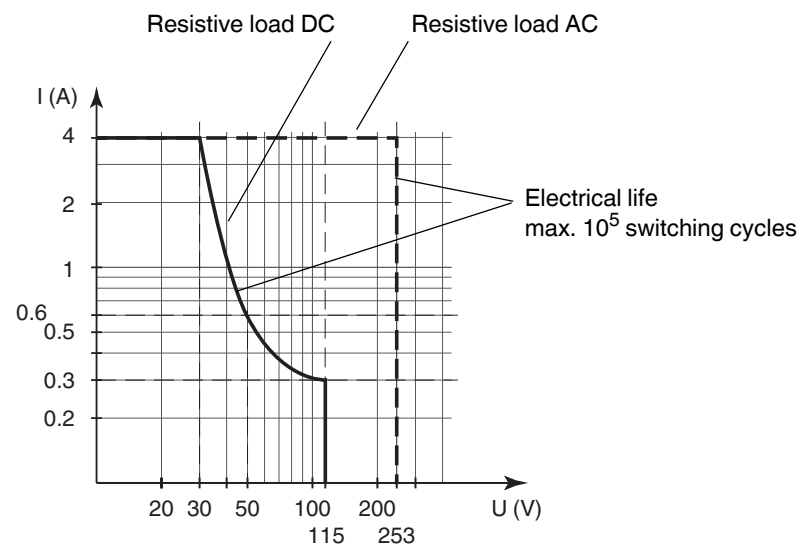

The maximum number of switching cycles is depending on the electrical load and may be higher when reduced currents and voltages are applied.