

Features


- 1-channel
- Fully compatible replacement for FB3201B
- Input Ex ia
- Installation in suitable enclosures in Zone 1
- Module can be exchanged under voltage (hot swap)
- Power supply for 2- or 3-wire transmitters with 4 mA ... 20 mA
- Supply circuit 15 V (20 mA)
- Input from active signals of 4-wire transmitters
- Simulation mode for service operations (forcing)
- Line fault detection (LFD) and Live Zero monitoring
- Permanently self-monitoring

Function


The transmitter power supply feeds 2- and 3-wire transmitters. Active signals from separately powered field devices and 4-wire transmitters can be connected. Open-circuit, short-circuit, and Live Zero status are detected. The intrinsically safe input is galvanically isolated from the bus and the power supply.

Assembly

Front view

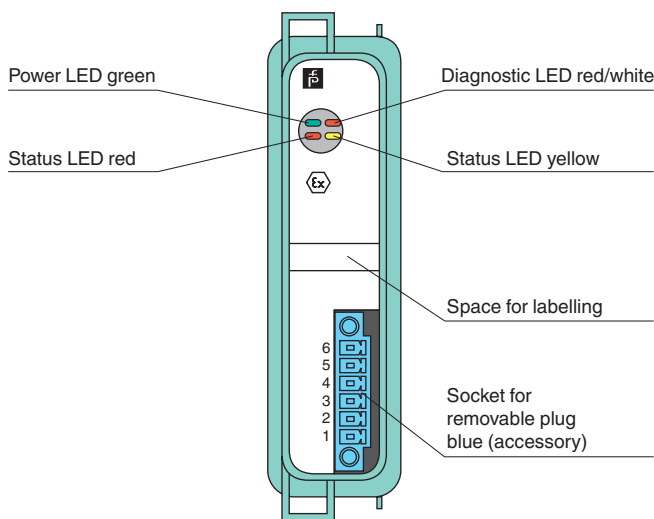

Connection

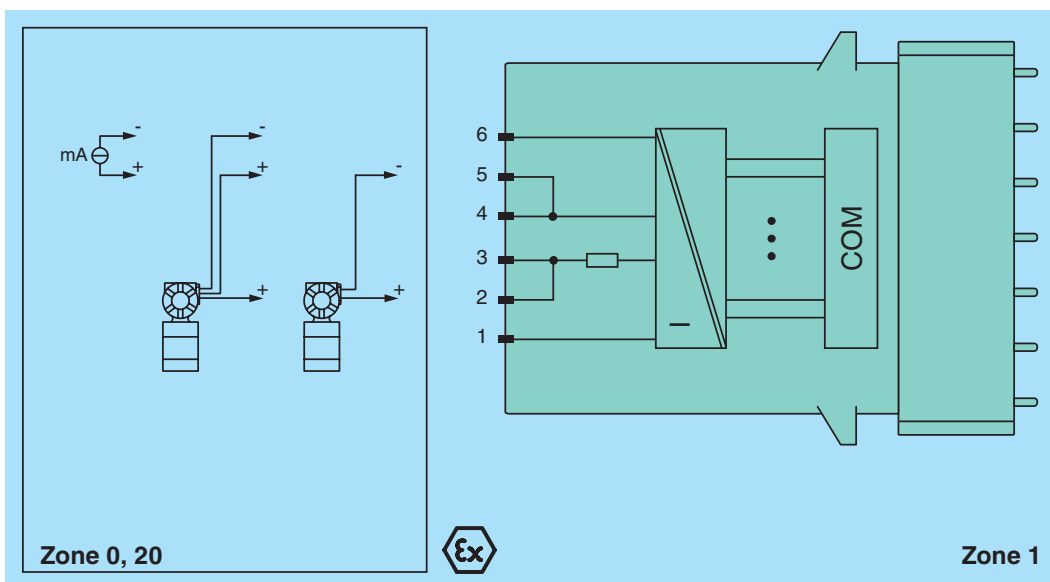

Release date 2018-09-13 14:46 Date of issue 2018-09-13 270476_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Slots		
Occupied slots		1
Supply		
Connection		backplane bus
Rated voltage	U_r	12 V DC , only in connection with the power supplies FB92**
Power dissipation		0.75 W
Power consumption		1.05 W
Internal bus		
Connection		backplane bus
Interface		manufacturer-specific bus to standard com unit
Analog input		
Number of channels		1
Suitable field devices		
Field device		pressure converter
Field device [2]		flow converter
Field device [3]		level converter
Field device [4]		Temperature Converter
Field device interface		
Connection		2-wire transmitter
Connection [2]		3-wire transmitter
Connection [3]		4-wire transmitter
Connection		2-wire transmitter: supply circuit: 2/3+, 4/5- 3-wire transmitter: supply circuit: 2/3+, 6- measuring circuit: 4/5+, 6- 4-wire transmitter (separately powered): measuring circuit: 4/5+, 6-
Transmitter supply voltage		≥ 15 V at 20 mA ; 21.5 V at 4 mA
Input resistance		15 Ω (terminals 5, 6)
Line fault detection		
Short-circuit		factory setting: > 22 mA configurable between 0 ... 26 mA
Open-circuit		factory setting: < 1 mA configurable between 0 ... 26 mA
HART communication		no
HART secondary variable		no
Analog output		
HART communication		no
HART secondary variable		no
Transfer characteristics		
Deviation		
After calibration		0.1 % of the signal range at 20 °C (68 °F)
Influence of ambient temperature		0.1 %/10 K of the signal range
Resolution		12 Bit (0 ... 26 mA)
Refresh time		100 ms
Indicators/settings		
LED indication		Power LED (P) green: supply Diagnostic LED (I) red: module fault , red flashing: communication error , white: fixed parameter set (parameters from com unit are ignored) , white flashing: requests parameters from com unit Status LED (1) red: line fault (lead breakage or short circuit) Status LED (2) yellow: Live Zero monitoring
Coding		optional mechanical coding via front socket
Directive conformity		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2006
Conformity		
Electromagnetic compatibility		
Degree of protection		IEC 60529:2000
Environmental test		EN 60068-2-14:2009
Shock resistance		EN 60068-2-27:2009
Vibration resistance		EN 60068-2-6:2008
Damaging gas		EN 60068-2-42:2003
Relative humidity		EN 60068-2-78:2001
Ambient conditions		
Ambient temperature		-20 ... 60 °C (-4 ... 140 °F)
Storage temperature		-25 ... 85 °C (-13 ... 185 °F)
Relative humidity		95 % non-condensing

Release date 2018-09-13 14:46 Date of issue 2018-09-13 270476_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Shock resistance	shock type I, shock duration 11 ms, shock amplitude 15 g, number of shocks 18	
Vibration resistance	frequency range 10 ... 150 Hz; transition frequency: 57.56 Hz, amplitude/acceleration ± 0.075 mm/1 g; 10 cycles frequency range 5 ... 100 Hz; transition frequency: 13.2 Hz amplitude/acceleration ± 1 mm/0.7 g; 90 minutes at each resonance	
Damaging gas	designed for operation in environmental conditions acc. to ISA-S71.04-1985, severity level G3	
Mechanical specifications		
Degree of protection	IP20 (module) , a separate housing is required acc. to the system description	
Connection	removable front connector with screw flange (accessory) wiring connection via spring terminals (0.14 ... 1.5 mm ²) or screw terminals (0.08 ... 1.5 mm ²)	
Mass	approx. 350 g	
Dimensions	28 x 107 x 132 mm (1.1 x 4.2 x 5.2 inch)	
Data for application in connection with hazardous areas		
EU-Type Examination Certificate	BVS 13 ATEX E 050 X	
Marking	Ex II 2(1) G Ex d [ia Ga] IIC T4 Gb Ex II (1) D [Ex ia Da] IIIC	
Supply		
Voltage	U _o	23.8 V
Current	I _o	90 mA
Power	P _o	533 mW (linear characteristic)
Input		
Voltage	U _o	0.7 V
Current	I _o	7 mA
Power	P _o	5 mW (trapezoid characteristic curve)
Internal capacitance	C _i	242 nF
Internal inductance	L _i	0 mH
Galvanic isolation		
Input/power supply, internal bus	safe electrical isolation acc. to EN 60079-11:2007 , voltage peak value 375 V	
Directive conformity		
Directive 2014/34/EU	EN 60079-0:2009 EN 60079-1:2007 EN 60079-11:2012 EN 60079-26:2007	
International approvals		
INMETRO	Brazil: TÜV 14.1596X	
Marine approval		
Bureau Veritas Marine	22449/B0 BV	
General information		
System information	The module has to be mounted in appropriate backplanes and housings (FB92**) in Zone 1, 2, 21, 22 or outside hazardous areas (gas or dust). Here, observe the corresponding EC-type examination certificate.	
Supplementary information	EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see www.pepperl-fuchs.com .	

Release date 2018-09-13 14:46 Date of issue 2018-09-13 270476_eng.xml