

## Features

- Backplane for LB-System
- Fieldbus type determined by base backplane
- Max. 16 slots for I/O modules
- Mounting in Zone 2, Class I/Div.2 or in the safe area

## Technical data

### General specifications

Suitable components Backplane LB9026BP16210.0.E , LB9026BP16210.1

### Slots

Supply 2  
I/O modules (single width) max. 16  
I/O modules (dual width) max. 8

### Supply

Maximum safe voltage  $U_m$  60 V DC (SELV/PELV)  
Input voltage range  $U$  18 ... 32 V DC (SELV/PELV)  
Redundancy no

### Fieldbus interface

Fieldbus type PROFIBUS DP/DP-V1, PROFINET or MODBUS RTU/TCP, depending on the base backplane  
Redundancy no

### Directive conformity

Electromagnetic compatibility  
Directive 2014/30/EU EN 61326-1:2006

### Conformity

Electromagnetic compatibility NE 21  
Degree of protection EN 60529

### Ambient conditions

Ambient temperature -20 ... 60 °C (-4 ... 140 °F), 70 °C (non-Ex)  
Storage temperature -25 ... 85 °C (-13 ... 185 °F)  
Relative humidity 95 % non-condensing  
Shock resistance shock type I, shock duration 11 ms, shock amplitude 15 g, number of shocks 18  
Vibration resistance frequency range 10 ... 150 Hz; transition frequency: 57.56 Hz, amplitude/acceleration  $\pm 0.075$  mm/1 g; 10 cycles  
frequency range 5 ... 100 Hz; transition frequency: 13.2 Hz amplitude/acceleration  $\pm 1$  mm/0.7 g; 90 minutes at each resonance

### Damaging gas

designed for operation in environmental conditions acc. to ISA-S71.04-1985, severity level G3

### Mechanical specifications

Degree of protection IP20  
Mass approx. 1340 g  
Dimensions (W x H x D)  
440 x 127 x 80 mm (17.3 x 5 x 3.15 inch), without modules

### Data for application in connection with hazardous areas

Certificate BVS 16 ATEX E 089 X  
Marking II 3 G Ex nA IIC T4 Gc  
Directive conformity  
Directive 2014/34/EU EN 60079-0:2009  
EN 60079-15:2010

### International approvals

UL approval E106378  
Control drawing 116-0321  
Approved for cUL (Canada): CL I Zn. 2 IIC; IS circuits for CL I Zn. 0 IIC  
ULus (USA): CL I Div. 2 Grp. A, B, C, D; IS circuits for CL I, II, III Div. 1 Grp. A, B, C, D, E, F, G

IECEX approval IECEX BVS 16.0047X

Approved for Ex nA IIC T4 Gc


### Marine approval

Bureau Veritas Marine 22449/B0 BV

### General information

Supplementary information Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see [www.pepperl-fuchs.com](http://www.pepperl-fuchs.com).

Assembly

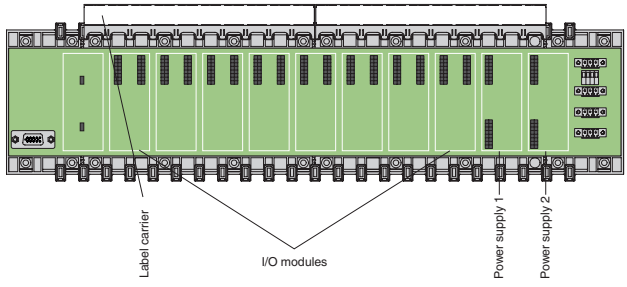

Release date 2018-07-26 13:39 Date of issue 2018-07-26 282734\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com