

Features

- Place holder for protection module or function module
- Blank module, non-functional
- Mounting on base module, pluggable

Function

The device is a place holder for a protection module or a function module. The device has no function.

The device is inserted onto the base module and protects the wired base module against contamination.


The device can be replaced without tools.

Assembly

Front view



Connection

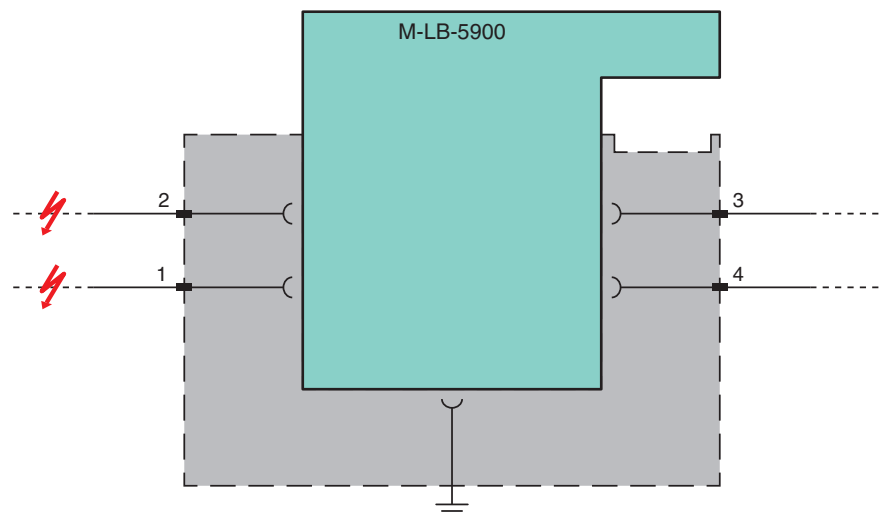

Zone 2

Conformity	
Degree of protection	IEC 60529:2013
Ambient conditions	
Ambient temperature	-40 ... 60 °C (-40 ... 140 °F)
Storage temperature	-40 ... 85 °C (-40 ... 185 °F)
Relative humidity	max. 95 % , without condensation
Mechanical specifications	
Degree of protection	IP20
Mass	approx. 20 g
Dimensions	6.2 x 77 x 74 mm
Mounting	pluggable in base module for mounting on 35 mm DIN mounting rail
General information	
Supplementary information	Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com .
Accessories	
Designation	system components: - base module with screw terminals M-LB-5000 - base module with spring terminals M-LB-5000.SP - protection module M-LB-5XXX - power feed module M-LB-5300 - fault status module M-LB-5400 - maintenance status module M-LB-5500 - Universal Power Rail M-UPR-03-S - insulation spacer M-UPR-I

Release date 2018-02-13 12:24 Date of issue 2018-02-13 286768_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com