

## Features

- 1-channel isolated barrier
- 24 V DC supply (Power Rail)
- Current input 0 mA ... 20 mA
- Voltage output 1 V ... 5 V
- Accuracy 0.1 %

## Function

This isolated barrier is used for intrinsic safety applications.

The device drives I/P converters, electrical valves, and positioners in the hazardous area.

The device has current input and voltage output.


A current limit circuit in series to terminal 9 protects the device from damage. The maximum voltage drop at the input is 4 V DC, allowing for the connection of several devices due to the low voltage drop in order to maintain multiple galvanically isolated outputs (signal duplication).

At least 20 mA is available within the allowable supply voltage range at terminals 1 and 2 which means that with 10 V output voltage, a load of at least 500  $\Omega$  must be connected.


The device is not SIL-rated, because the open circuit at the input does not output a safe state (4 mA or 1 V).

## Assembly

Front view

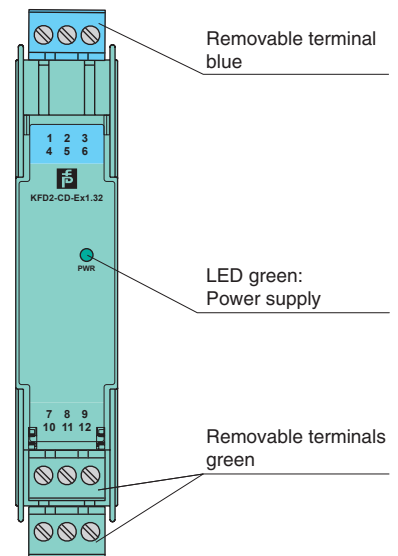

## Connection

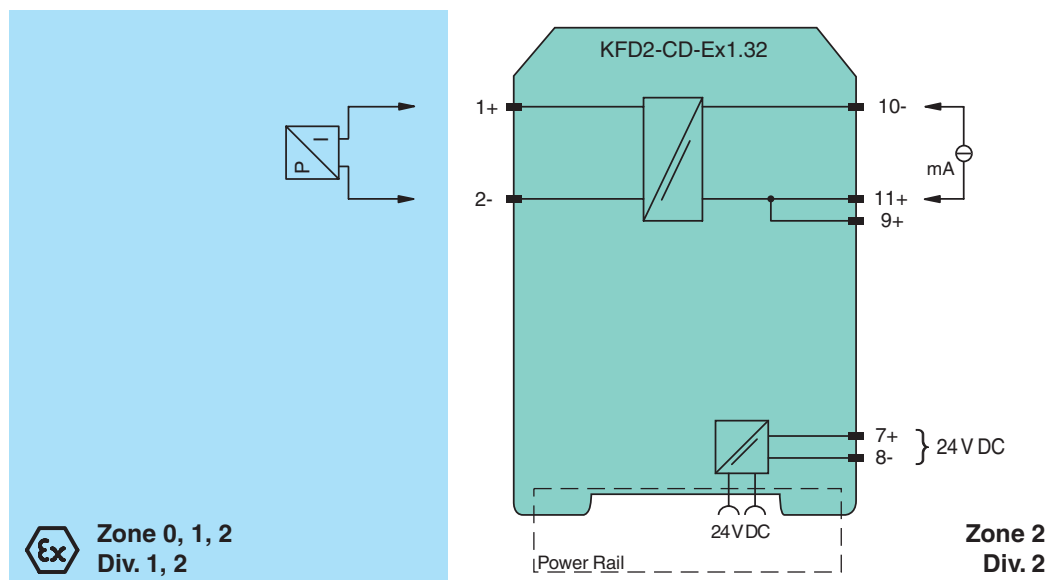

Release date 2019-01-15 08:50 Date of issue 2019-01-15 295078\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com

**PF** PEPPERL+FUCHS

<b>General specifications</b>		
Signal type		Analog output
<b>Supply</b>		
Connection		Power Rail or terminals 7+, 8-
Rated voltage	$U_r$	20 ... 35 V DC
Ripple		within the supply tolerance
Rated current	$I_r$	≤ 20 mA
Power dissipation		1.4 W
<b>Input</b>		
Connection side		control side
Connection		terminals 9+, 10-, 11+
Voltage drop		approx. 4 V at 20 mA
Input current		≤ 100 μA up to 50 °C (122 °F) at 10 V
Limit		≤ 40 mA
Transmission range		0 ... 20 mA
<b>Output</b>		
Connection side		field side
Connection		terminals 1+, 2-
Current		≤ 20 mA
Load		output resistance: ≤ 3 Ω
Voltage		1 ... 5 V
<b>Transfer characteristics</b>		
Accuracy		0.1 %
Deviation		
After calibration		≤ ± 0.1 % incl. non-linearity and hysteresis at 20 °C (68 °F)
Influence of ambient temperature		≤ ± 0.01 %/K
Rise time		< 10 ms
<b>Galvanic isolation</b>		
Input/power supply		functional insulation, rated insulation voltage 50 V AC
<b>Indicators/settings</b>		
Display elements		LED
Labeling		space for labeling at the front
<b>Directive conformity</b>		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013 (industrial locations)
<b>Conformity</b>		
Degree of protection		IEC 60529:2001
Protection against electrical shock		UL 61010-1:2012
<b>Ambient conditions</b>		
Ambient temperature		-20 ... 60 °C (-4 ... 140 °F)
<b>Mechanical specifications</b>		
Degree of protection		IP20
Connection		screw terminals
Mass		approx. 100 g
Dimensions		20 x 107 x 115 mm (0.8 x 4.2 x 4.5 inch) , housing type B1
Mounting		on 35 mm DIN mounting rail acc. to EN 60715:2001
<b>Data for application in connection with hazardous areas</b>		
EU-Type Examination Certificate		BAS 02 ATEX 7203 X
Marking		⊕ II (1)G [Ex ia Ga] IIC , ⊕ II (1)D [Ex ia Da] IIIC , ⊕ I (M1) [Ex ia Ma] I
Certificate		TÜV 99 ATEX 1499 X
Marking		⊕ II 3G Ex nA II T4
Directive conformity		
Directive 2014/34/EU		EN 60079-0:2012+A11:2013 , EN 60079-11:2012 , EN 60079-15:2010
<b>International approvals</b>		
FM approval		
Control drawing		116-0440
UL approval		
Control drawing		116-0441 (cULus)
IECEx approval		IECEx BAS 05.0041X
Approved for		[Ex ia Ga] IIC, [Ex ia Da] IIIC, [Ex ia Ma] I
<b>General information</b>		
Supplementary information		Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .

Release date 2019-01-15 08:50 Date of issue 2019-01-15 295078\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Accessories	
Optional accessories	<ul style="list-style-type: none"> <li>- power feed module KFD2-EB2(.R4A.B)(.SP)</li> <li>- universal power rail UPR-03(-M)(-S)</li> <li>- profile rail K-DUCT-BU(-UPR-03)</li> </ul>

Release date 2019-01-15 08:50 Date of issue 2019-01-15 295078\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".