

## Features

- 1 digital output, 2 digital inputs
- Inputs and output Ex ia
- Installation in suitable enclosures in Zone 1
- Module can be exchanged under voltage (hot swap)
- Positive or negative logic selectable
- Simulation mode for service operations (forcing)
- Line fault detection (LFD)
- Permanently self-monitoring
- Output with watchdog

## Function

The digital output features 1 output with 2 feedback inputs.

The device can be used to switch solenoids, sounders, or indicators (without line fault detection) in the field.


Furthermore, the device accepts digital input signals of NAMUR sensors or mechanical contacts from the field.

Open and short-circuit line faults are detected.


The intrinsically safe inputs and the output are galvanically isolated from the bus and the power supply.

## Assembly


Front view

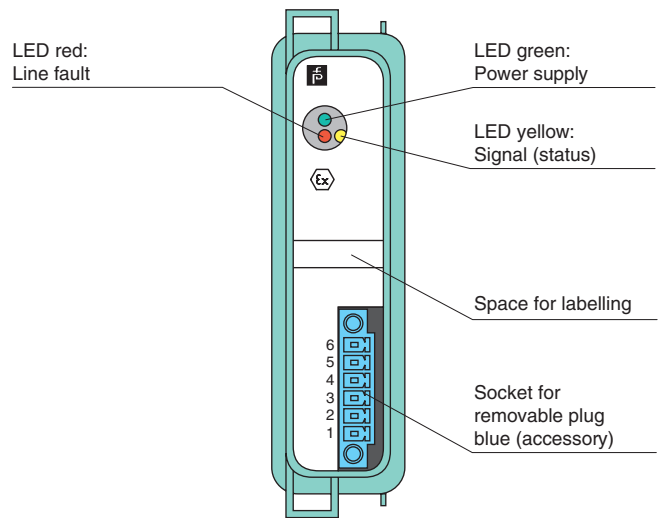

## Connection

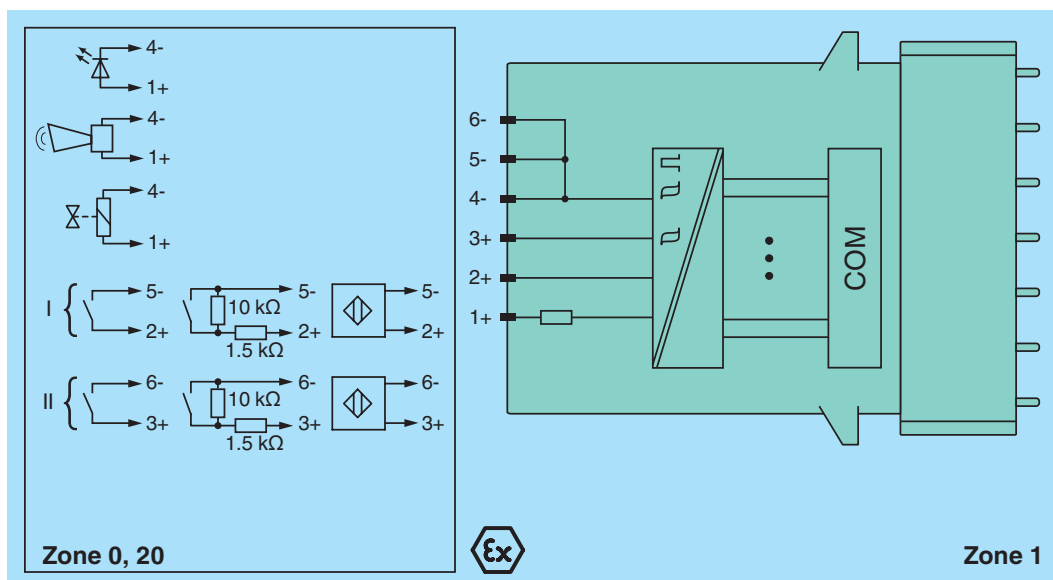


<b>Slots</b>	
Occupied slots	1
<b>Supply</b>	
Connection	backplane bus
Rated voltage $U_r$	12 V DC , only in connection with the power supplies FB92**
Power dissipation	1.5 W
Power consumption	1.5 W
<b>Internal bus</b>	
Connection	backplane bus
Interface	manufacturer-specific bus to standard com unit
<b>Digital input</b>	
Number of channels	2
<b>Sensor interface</b>	
Connection	NAMUR sensor
Connection [2]	volt-free contact
Connection [3]	active binary signal 24 V DC
Connection	channel I: 2+, 5-; channel II: 3+, 6-
Rated values	acc. to EN 60947-5-6 (NAMUR)
Switching point/switching hysteresis	1.2 ... 2.1 mA / $\pm 0.2$ mA
Internal resistor $R_i$	1 k $\Omega$
Line fault detection	can be switched on/off for each channel via configuration tool
Connection	mechanical switch with additional resistors (see connection diagram) proximity switches without additional wiring
Short-circuit	< 360 $\Omega$
Open-circuit	< 0.35 mA
Minimum pulse duration	1 ms
<b>Digital output</b>	
Number of channels	1
<b>Suitable field devices</b>	
Field device	Solenoid Valve
Field device [2]	audible alarm
Field device [3]	visual alarm
Connection	channel I: 1+, 4-
Open loop voltage $U_s$	26.7 V
Current limit $I_{max}$	40 mA
Internal resistor $R_i$	509 $\Omega$
Line fault detection	can be switched on/off for each channel via configuration tool , also when turned off (every 2.5 s the valve is turned on for 2 ms)
Short-circuit	< 200 $\Omega$
Open-circuit	> 6 k $\Omega$
Response time	20 ms (depending on bus cycle time)
Watchdog	within 0.5 s the device goes in safe state, e.g. after loss of communication
<b>Indicators/settings</b>	
LED indication	LED green: supply LED red: output line fault LED yellow: status output
Coding	optional mechanical coding via front socket
<b>Directive conformity</b>	
Electromagnetic compatibility	
Directive 2014/30/EU	EN 61326-1
<b>Conformity</b>	
Electromagnetic compatibility	NE 21
Degree of protection	IEC 60529
Environmental test	EN 60068-2-14
Shock resistance	EN 60068-2-27
Vibration resistance	EN 60068-2-6
Damaging gas	EN 60068-2-42
Relative humidity	EN 60068-2-56
<b>Ambient conditions</b>	
Ambient temperature	-20 ... 60 °C (-4 ... 140 °F)
Storage temperature	-25 ... 85 °C (-13 ... 185 °F)
Relative humidity	95 % non-condensing
Shock resistance	shock type I, shock duration 11 ms, shock amplitude 15 g, number of shocks 18

Vibration resistance		frequency range 10 ... 150 Hz; transition frequency: 57.56 Hz, amplitude/acceleration ± 0.075 mm/1 g; 10 cycles frequency range 5 ... 100 Hz; transition frequency: 13.2 Hz amplitude/acceleration ± 1 mm/0.7 g; 90 minutes at each resonance
Damaging gas		designed for operation in environmental conditions acc. to ISA-S71.04-1985, severity level G3
Mechanical specifications		
Degree of protection		IP20 (module) , a separate housing is required acc. to the system description
Connection		removable front connector with screw flange (accessory) wiring connection via spring terminals (0.14 ... 1.5 mm <sup>2</sup> ) or screw terminals (0.08 ... 1.5 mm <sup>2</sup> )
Mass		approx. 350 g
Dimensions		28 x 107 x 132 mm (1.1 x 4.2 x 5.2 inch)
Data for application in connection with hazardous areas		
EU-Type Examination Certificate		PTB 97 ATEX 1074 U
Marking		 II 2(1) G Ex d [ia Ga] IIC Gb
Input		
Voltage	U <sub>o</sub>	14.1 V
Current	I <sub>o</sub>	16 mA
Power	P <sub>o</sub>	55 mW (linear characteristic)
Internal capacitance	C <sub>i</sub>	1.65 nF
Output		
Voltage	U <sub>o</sub>	28.7 V
Current	I <sub>o</sub>	68 mA
Power	P <sub>o</sub>	485 mW
Internal capacitance	C <sub>i</sub>	1.65 nF
Galvanic isolation		
Input/power supply, internal bus		safe electrical isolation acc. to EN 60079-11, voltage peak value 375 V
Output/power supply, internal bus		safe electrical isolation acc. to EN 60079-11, voltage peak value 375 V
Directive conformity		
Directive 2014/34/EU		EN 60079-0:2009 EN 60079-1:2007 EN 60079-11:2007 EN 60079-26:2007 EN 61241-11:2006
International approvals		
ATEX approval		PTB 97 ATEX 1075 ; PTB 97 ATEX 1074 U
EAC approval		Russia: RU C-IT.MIII06.B.00129
Marine approval		
Lloyd Register		15/20021
DNV GL Marine		TAA0000034
American Bureau of Shipping		T1450280/UN
Bureau Veritas Marine		22449/B0 BV
General information		
System information		The module has to be mounted in appropriate backplanes and housings (FB92**) in Zone 1, 2, 21, 22 or outside hazardous areas (gas or dust). Here, observe the corresponding EC-type examination certificate.
Supplementary information		EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .

## Output data

## Load calculation



$R_{load}$  = Field loop resistance

$$U_e = U_s - R_i \times I_e$$

$$I_e = U_s / (R_i + R_{load})$$

## Output characteristics

