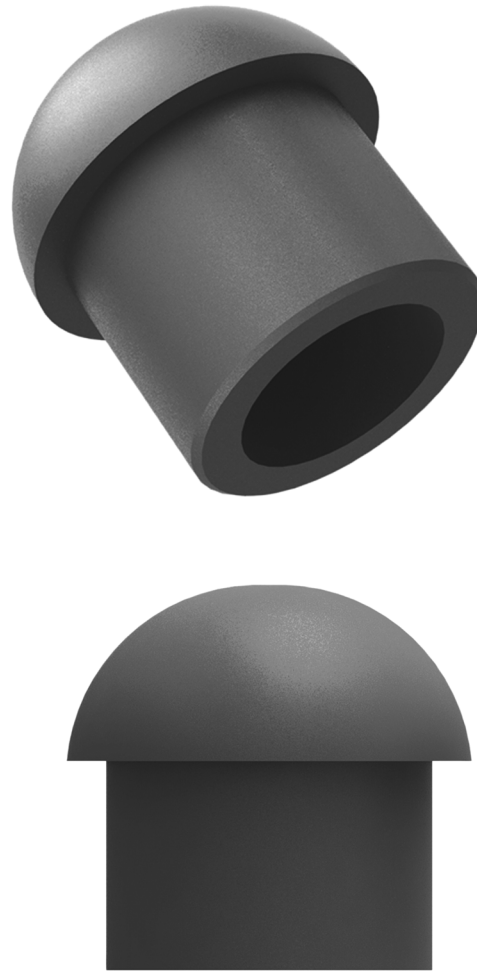


Features

- Sealing element for installation of cable glands in enclosures
- Accessory for CG.P*DS.* size M16 ... M20S cable glands plastic with double seal insert
- Polyamide
- Ex e and Ex tb certified
- Suitable for operation in Zone 1, Zone 2, Zone 21 and Zone 22
- Packaging unit: 50 pieces, without accessories


Assembly**Technical data****Mechanical specifications**

Degree of protection	IP66 / IP68
Material	Polyamide (PA)
Finish	inherent color green
Mass	
Individual component	approx. 0.9 g
Packing unit	approx. 65 g
Dimensions	
Diameter (D)	7 mm
Outer diameter (DO)	13.3 mm
Length of pin (PL)	15 mm
Total length (L)	20.7 mm

Ambient conditions

Ambient temperature	-60 ... 70 °C (-76 ... 158 °F)
---------------------	--------------------------------

Data for application in connection with hazardous areas

EU-Type Examination Certificate	IMQ 15 ATEX 006 X
Marking	 II 2 GD Ex e IIC Gb Ex tb IIIC Db

International approvals

IECEx approval	IECEx IMQ 15.0001X
----------------	--------------------

Conformity

Degree of protection	EN 60529
----------------------	----------

General information

Note	For exact reference to types and sizes of cable glands please refer to the specific datasheets
Delivery quantity	50

Scope of delivery

Sealing Plugs for plastic Cable Glands
brief instructions (1 copy)

Supplementary information

EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see www.pepperl-fuchs.com.**Dimensions**