



Model Number


IUT-F190-R4-V1-FR2-14

UHF readwrite station, Singapore and Vietnam


Features

- Flexible UHF read/write station with medium detection range
- Ready-made PLC function blocks designed for quick and easy system integration
- Compact and robust housing for harsh industrial environments
- Switchable antenna polarization guarantees reliable tag detection and enhances process flow
- Multi-tag reading of up to 40 tags ensures increased productivity
- Connection via integrated RS-485 interface

Dimensions

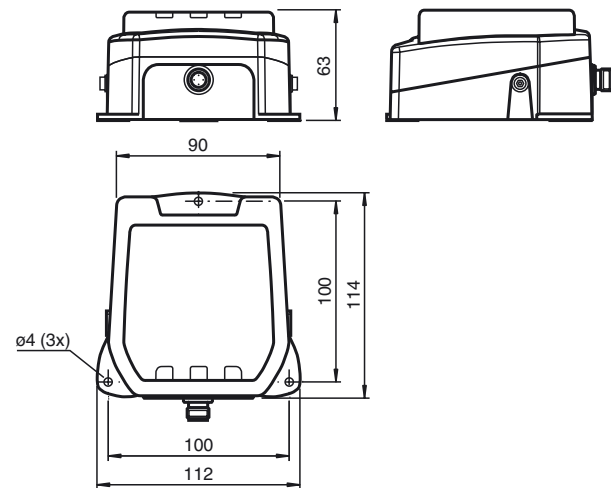

Electrical connection

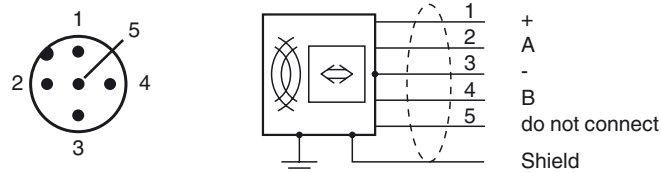

Technical data

General specifications

Operating frequency	920 MHz ... 925 MHz: Singapore, Vietnam Transmission licenses for other countries on request
Emitted power	3 ... 500 mW ERP adjustable
Operating distance	typ. 2 m

Indicators/operating means

LED green	Power on
LED yellow	Read/write operation successful
LED blue	Transmission mode

Electrical specifications

Rated operating voltage	U_e	20 ... 30 V DC, ripple 10 % _{SS}
Current consumption		≤ 450 mA
Power consumption	P_0	≤ 9 W
Surge protection		category 2

Interface

Physical	RS-485 point-to-point connection
Protocol	ASCII
Transfer rate	1200, 2400, 4800, 9600, 19200, 38400 (default) Bit/s

Standard conformity

Electromagnetic compatibility	EN 301489-1 V2.1.1:2017 EN 301489-3 V2.1.1:2017
Degree of protection	EN 60529:2000
Safety	EN 62368-1:2014+AC:2015

Ambient conditions

Classification	Environmental situation A (controlled environment)
Ambient temperature	-20 ... 70 °C (-4 ... 158 °F) (Operation with nontransmission periods, adjustable) -20 ... 60 °C (-4 ... 140 °F) (Continuous transmission mode)
Storage temperature	-40 ... 85 °C (-40 ... 185 °F)
Pollution degree	2

Mechanical specifications

Degree of protection	IP67
Connection	M12 x 1 connector
Material	
Housing	PA 6
Base	diecast aluminum
Mass	860 g

Notes

This product is a wireless device and may be operated only in the country for which a transmission license exists. Information regarding transmission licenses can be found on the datasheet for the product. If a product is released to a customer in a country for which there is no transmission license, the product may be operated only in the country for which a transmission license exists.

If a product does not correspond to the legal requirements in force in the EU but is released to a purchaser within the EU, the product is intended for use solely in the destination country of the end customer outside of the EU for which a transmission license exists. The product may therefore under no circumstances be used directly by the purchaser or released to third parties for the purpose of distribution, application or use on the market within the EU as part of a commercial activity.

In the event of an infringement, the purchaser is obliged to indemnify the supplier against any resulting damages, costs, penalty payments and other expenses.

Notes**Preferences:**

Interface transfer rate: 38400 bps

Port settings: 8 data bits, no parity, 1 stop bit, no handshake

Transpondertype: 80

Function

The compact IUT-F190-R4-V1-FR2-14 read/write station operates in the UHF frequency range and is optimized for industrial use at medium distances. The device writes and reads passive transponders according to EPC Gen2 (ISO/IEC 18000-63). The read/write station can be used in Singapore and Vietnam. The read/write station is compliant with the relevant radio regulations.

Wide range of options supported for filtering data. The read/write station has an RS-485 interface and is connected via an M12 connector. The user can monitor the status of the read/write station using the integrated LEDs.

The read/write station has a typical detection range of approximately 2 m, which is determined by the transponder used and can be adjusted by the setting of the transmission power. Other influencing factors include the setup and installation of the specific application and the surrounding materials, in particular metal. The separately specified read and write distances for the respective transponders have been determined in a test laboratory under ideal conditions. For the actual read and write distances under real conditions, the combination of read/write station and transponder must be tested in the desired application.

Accessories**V1-G-5M-PUR-ABG-V1-W**

Connecting cable, M12 to M12, PUR cable 4-pin, shielded

V1-G-10M-PUR-ABG-V1-W

Connecting cable, M12 to M12, PUR cable 4-pin, shielded

IUC72-F152-M-FR1

Data carrier

IUC76-50-FR1

Data carrier

IUC76-F157-M-FR1

Data carrier

IUC76-F203-M-FR1 10pcs

Data carrier

IUC77-F151-M-GBL

Data carrier

IUC77-25L100-GBL 1000pcs

Data carrier

IUC77-25L110-GBL 1000pcs

Data carrier

IUZ-MH12

Mounting bracket for pole and wall mounting

IUZ-MH13

Mounting bracket for wall mounting

IUZ-MH15

Mounting aid for round steel \varnothing 12 mm or sheet 1.5 mm ... 3 mm