



Model Number

OMD8000-R2100-Y317114

2-D LiDAR Sensor
with two M12 x 1 connectors

Features


- Distance measurement using object
- Two-dimensional measurement with no moving parts
- Measurement using eye-safe LED technology
- 88° scanning angle
- CANopen interface
- Measuring method PRT (Pulse Ranging Technology)

Product information


The new 2-dimensional multi-ray LED scanner uses tried-and-tested Pulse Ranging Technology and boasts a wide range of user-friendly features. The eye-safe LED technology in the sensor allows it to be used by personnel in all working areas without posing a danger. The 11 emitter elements arranged side by side span a scanning range of 88 degrees, while the emitter LEDs set themselves apart through their large light spot. Measuring on a surface rather than on a point makes it easier to measure inhomogeneous surfaces. A further highlight is the absence of any moving parts such as a motor or bearings, which makes the device less complex in its design and more resistant to mechanical stress.

Release date: 2018-05-08 08:15 Date of issue: 2018-05-14 317114_eng.xml


Dimensions

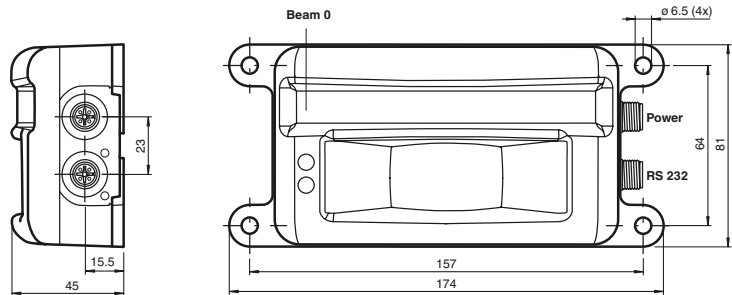

Electrical connection

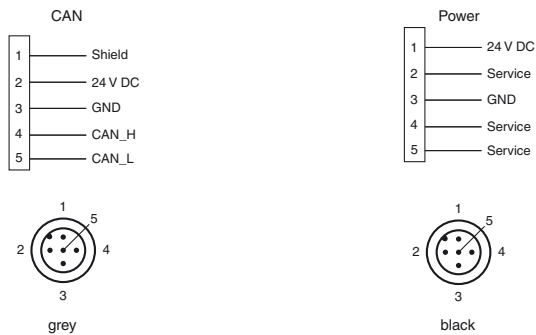

Indicators/operating means

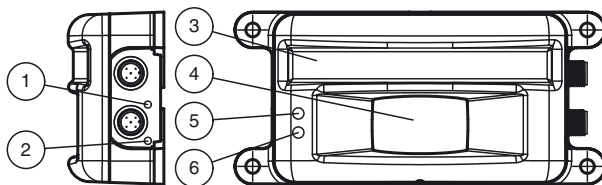

1	CAN ERROR	red
2	CAN RUN	green
3	Emitter	
4	Receiver	
5	Operating indicator	green
6	Function indicator	yellow

Technical data**General specifications**

Measurement range	0.2 ... 2 m (bw 6%) 0.2 ... 8 m (wh 90%) Max. 25 m<P>Min. echo pulse width 2500 mm from 0.2 m ... 1 m <P>
Light source	IREL
Light type	modulated infrared light , 850 nm
Measuring method	Pulse Ranging Technology (PRT)
Scan rate	50 s ⁻¹ (1 scan = 11 measurements)
Scanning angle	88°
Diameter of the light spot	550 mm at 4 m (orthogonal)
Ambient light limit	> 80000 Lux
Resolution	1 mm

Functional safety related parameters

MTTF _d	123 a
Mission Time (T _M)	20 a
Diagnostic Coverage (DC)	0 %

Indicators/operating means

Operation indicator	LED green
Data flow indicator	LED red: CAN Error LED green: CAN Run
Function indicator	LED yellow

Electrical specifications

Operating voltage	U _B	10 ... 30 V DC
Ripple		10 % within the supply tolerance
No-load supply current	I ₀	≤ 120 mA / 24 V DC
Protection class		III
Time delay before availability	t _v	< 3 s

Interface

Interface type	CAN
Protocol	CANopen, 250 kbit/s

Measurement accuracy

Measured value noise	20 mm (1 sigma, 4 m on white, orthogonal)
Angle resolution	8°
Absolute accuracy	+/- 50 mm (orthogonal)

Ambient conditions

Ambient temperature	-30 ... 60 °C (-22 ... 140 °F)
Storage temperature	-30 ... 70 °C (-22 ... 158 °F)
Relative humidity	95 % , no moisture condensation

Mechanical specifications

Housing width	81 mm
Housing height	45 mm
Degree of protection	IP67
Connection	5-pin, M12x1 connector, standard (supply; color black) 5-pin, M12x1 connector, standard (RS 232; color grey; shielded)
Material	
Housing	plastic
Optical face	Lexan (PC)
Mass	approx. 250 g

Compliance with standards and directives

Directive conformity	
EMC Directive 2004/108/EC	EN 60947-5-2:2007
Standard conformity	
Product standard	EN 60947-5-2:2007 IEC 60947-5-2:2007
Standards	EN 62471:2008

Approvals and certificates

UL approval	cULus Listed, Class 2 Power Source, Type 1 enclosure
CCC approval	CCC approval / marking not required for products rated ≤36 V

Accessories**V1-G-2M-PUR**

Female cordset, M12, 4-pin, PUR cable

V1-W-2M-PUR

Female cordset, M12, 4-pin, PUR cable

V15-G-5M-PUR-ABG

Female cordset, M12, 5-pin, shielded, PUR cable

V1-G-BK5M-PUR-U

Female cordset, M12, 4-pin, PUR cable

V1-W-BK5M-PUR-U

Female cordset, M12, 4-pin, PUR cable


V15-G-BK5M-PUR-U/ABG

Female cordset, M12, 5-pin, shielded, PUR cable

Other suitable accessories can be found at www.pepperl-fuchs.com



Curves/Diagrams

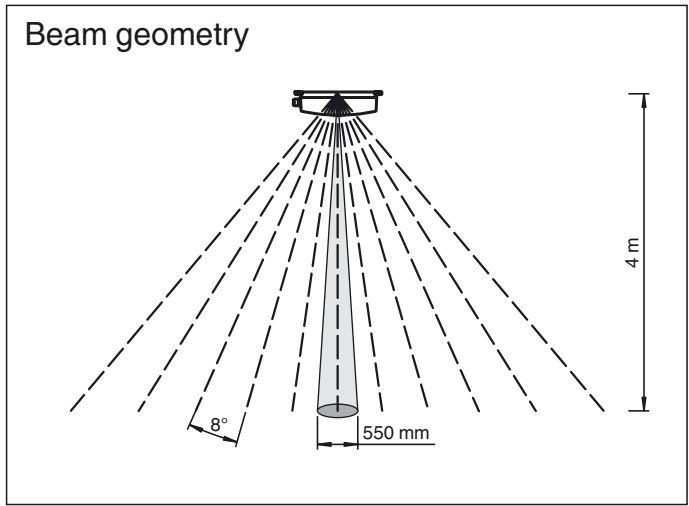

Release date: 2018-05-08 08:15 Date of issue: 2018-05-14 317114_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 4411
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com