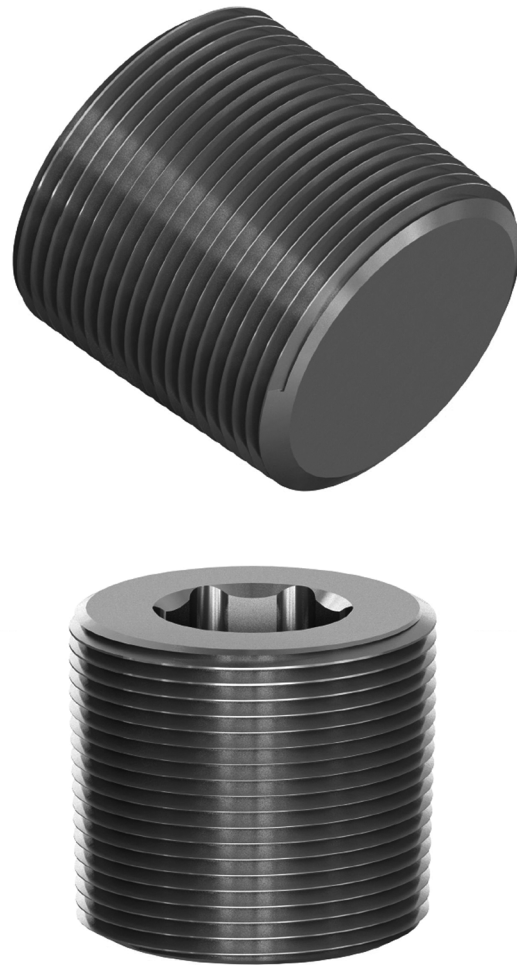


Features

- Stopping plug for unused cable entries
- Brass nickel-plated
- Thread NPT 1-1/4"
- Without head, installation by means of allen key
- Ex d, Ex e and Ex tb certified
- Suitable for operation in Zone 1, Zone 2, Zone 21 and Zone 22
- Suitable for operation in Class I, Zone 1/2/22
- Suitable for operation in Class I, Division 2 when installed in accordance with NEC501.10(B)(2)
- Degree of protection IP66 / IP68, UL Type 4X
- Packaging unit: 10 pieces, without accessories

Assembly**Technical data****Mechanical specifications**


Thread type	NPT ANSI ASME B1.20.1
Thread size (TD)	NPT 1-1/4"
Degree of protection	IP66 / IP68 , UL Type 4X
Material	
Finish	inherent color silver
Stopping plug	brass, nickel-plated
Mass	
Individual component	approx. 236 g
Packing unit	approx. 2.6 kg
Dimensions	
Diameter thru-hole (DT)	42.2 ... 42.4 mm
Thread length (TL)	25 mm
Total length (L)	25 mm
Key size (KS)	14 mm
Tightening torque	
Nut torque at enclosure (SW1)	13 Nm
Ambient conditions	
Ambient temperature	-60 ... 130 °C (-76 ... 266 °F)
Data for application in connection with hazardous areas	
EU-Type Examination Certificate	CESI 15ATEX029X
Marking	ⓧ II 2 GD Ex d IIC Gb Ex e IIC Gb Ex tb IIIC Db
International approvals	
UL approval	

Release date 2018-09-21 13:51 Date of issue 2018-09-21 400865_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

cULus	E305142 tested to UL 50E and UL 508A
CSA approval	CSA C22.2, No. 14-13
IECEX approval	IECEX CES 15.0006X
Conformity	
Degree of protection	EN 60529
General information	
Delivery quantity	10
Scope of delivery	Stopping Plugs, Metal, Hexagon Socket Head brief instructions (1 copy)
Supplementary information	EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see www.pepperl-fuchs.com .

Dimensions



Legend

1	Stopping plug
KS	Key size
L	Total length
TD	Thread size
TL	Thread length

Release date 2018-09-21 13:51 Date of issue 2018-09-21 400865_eng.xml