

Features

- 1-channel
- Input Ex ia
- Installation in suitable enclosures in Zone 1
- Module can be exchanged under voltage (hot swap)
- Converter for thermocouples and mV-signals
- Simulation mode for service operations (forcing)
- Line fault detection (LFD)
- Permanently self-monitoring

Function


The mV input accepts thermocouple or mV signals from the hazardous area.

Open circuit line fault alarms are detected.


The intrinsically safe input is galvanically isolated from the bus and the power supply (EN 60079-11).

Assembly

Front view

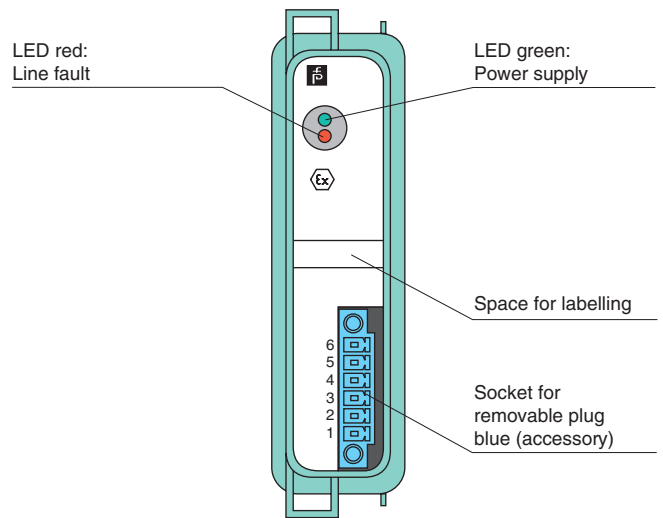

Connection

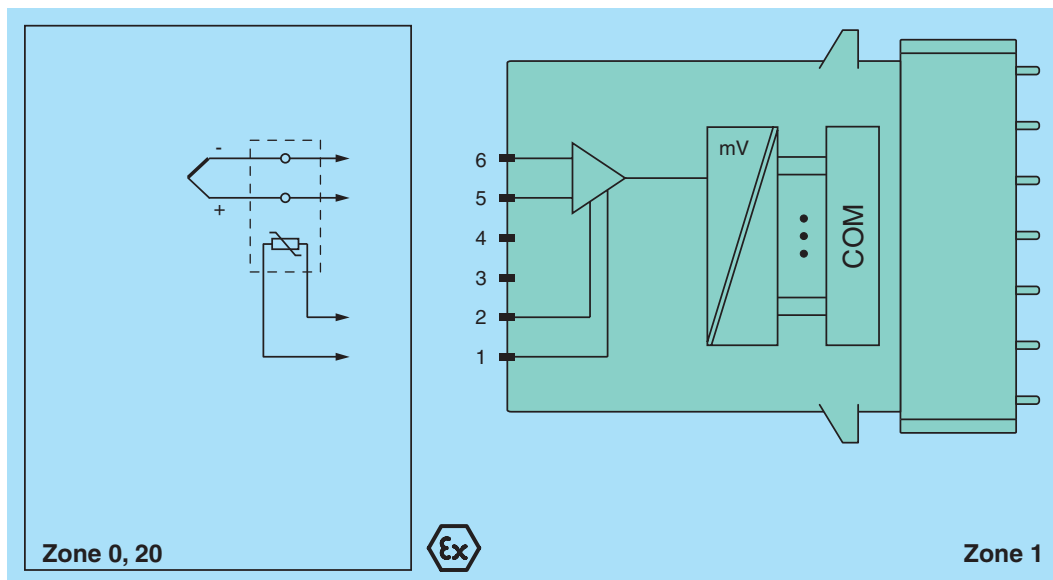

Release date 2018-10-01 14:14 Date of issue 2018-10-01 542106_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com



Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

Slots	
Occupied slots	1
Supply	
Connection	backplane bus
Rated voltage U_r	12 V DC , only in connection with the power supplies FB92**
Power dissipation	0.45 W
Power consumption	0.45 W
Internal bus	
Connection	backplane bus
Interface	manufacturer-specific bus to standard com unit
Input	
Compensation (reference junction CJC)	internal cold junction compensation or external cold junction
temperature input	
Number of channels	1
Suitable field devices	
Field device [2]	Thermocouple
Field device [4]	mV source
Suitable sensors	
Sensor	thermocouples U, B, E, T, K, S, R, L, J, N, Pallaplat and mV sources
Connection	cold junction: 1, 2 thermocouple: 5+, 6-
Measurement range	-75 ... mV ... 75 mV
Smallest span	5 mV for 0.1 % accuracy
Linearity error	0.1 %
Conversion time	internal cold junction: max. 120 ms without LFD max. 240 ms with LFD external cold junction: max. 20 ms without LFD max. 80 ms with LFD
Compensation (reference junction CJC)	internal cold junction compensation or external cold junction
Line fault detection	can be switched on/off for each channel via configuration tool ,
Open-circuit	> 1 k Ω
Transfer characteristics	
Deviation	
Influence of ambient temperature	max. 0,1 %/10 K
Indicators/settings	
LED indication	LED green: supply LED red: line fault
Coding	optional mechanical coding via front socket
Directive conformity	
Electromagnetic compatibility	
Directive 2014/30/EU	EN 61326-1
Conformity	
Electromagnetic compatibility	
Degree of protection	IEC 60529
Environmental test	EN 60068-2-14
Shock resistance	EN 60068-2-27
Vibration resistance	EN 60068-2-6
Damaging gas	EN 60068-2-42
Relative humidity	EN 60068-2-56
Ambient conditions	
Ambient temperature	-20 ... 60 °C (-4 ... 140 °F)
Storage temperature	-25 ... 85 °C (-13 ... 185 °F)
Relative humidity	95 % non-condensing
Shock resistance	shock type I, shock duration 11 ms, shock amplitude 15 g, number of shocks 18
Vibration resistance	frequency range 10 ... 150 Hz; transition frequency: 57.56 Hz, amplitude/acceleration \pm 0.075 mm/1 g; 10 cycles frequency range 5 ... 100 Hz; transition frequency: 13.2 Hz amplitude/acceleration \pm 1 mm/0.7 g; 90 minutes at each resonance
Damaging gas	designed for operation in environmental conditions acc. to ISA-S71.04-1985, severity level G3
Mechanical specifications	
Degree of protection	IP20 (module) , a separate housing is required acc. to the system description
Connection	removable front connector with screw flange (accessory) wiring connection via spring terminals (0.14 ... 1.5 mm ²) or screw terminals (0.08 ... 1.5 mm ²)
Mass	approx. 350 g
Dimensions	28 x 107 x 132 mm (1.1 x 4.2 x 5.2 inch)

Release date 2018-10-01 14:14 Date of issue 2018-10-01 542106_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Data for application in connection with hazardous areas		
EU-Type Examination Certificate		PTB 97 ATEX 1074 U
Marking		 
Input		
Voltage	U_o	1.8 V
Current	I_o	43 mA
Power	P_o	67 mW (trapezoid characteristic curve)
Galvanic isolation		
Input/power supply, internal bus		safe electrical isolation acc. to EN 60079-11, voltage peak value 375 V
Directive conformity		
Directive 2014/34/EU		EN 60079-0:2009 EN 60079-1:2007 EN 60079-11:2007 EN 60079-26:2007 EN 61241-11:2006
International approvals		
ATEX approval		PTB 97 ATEX 1075 ; PTB 97 ATEX 1074 U
EAC approval		Russia: RU C-IT.MIII06.B.00129
Marine approval		
Lloyd Register		15/20021
DNV GL Marine		TAA0000034
American Bureau of Shipping		T1450280/UN
Bureau Veritas Marine		22449/B0 BV
General information		
System information		The module has to be mounted in appropriate backplanes and housings (FB92**) in Zone 1, 2, 21, 22 or outside hazardous areas (gas or dust). Here, observe the corresponding EC-type examination certificate.
Supplementary information		EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see www.pepperl-fuchs.com .

Release date 2018-10-01 14:14 Date of issue 2018-10-01 542106_eng.xml