

**Features**

- 4-channel
- Inputs Ex ia
- Installation in suitable enclosures in Zone 1
- Module can be exchanged under voltage (hot swap)
- Converter for thermocouples and mV-signals
- Simulation mode for service operations (forcing)
- Line fault detection (LFD)
- Permanently self-monitoring

**Function**


The thermocouple converter accepts thermocouple or mV signals from the field.

Open circuit line fault alarms are detected.


The inputs are galvanically isolated from the bus and the power supply (EN 60079-11). There is a functional isolation between the channels.

**Assembly**

Front view

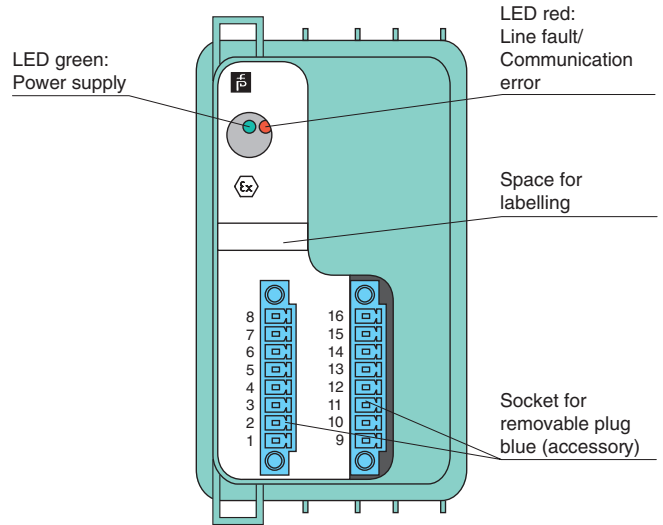

**Connection**

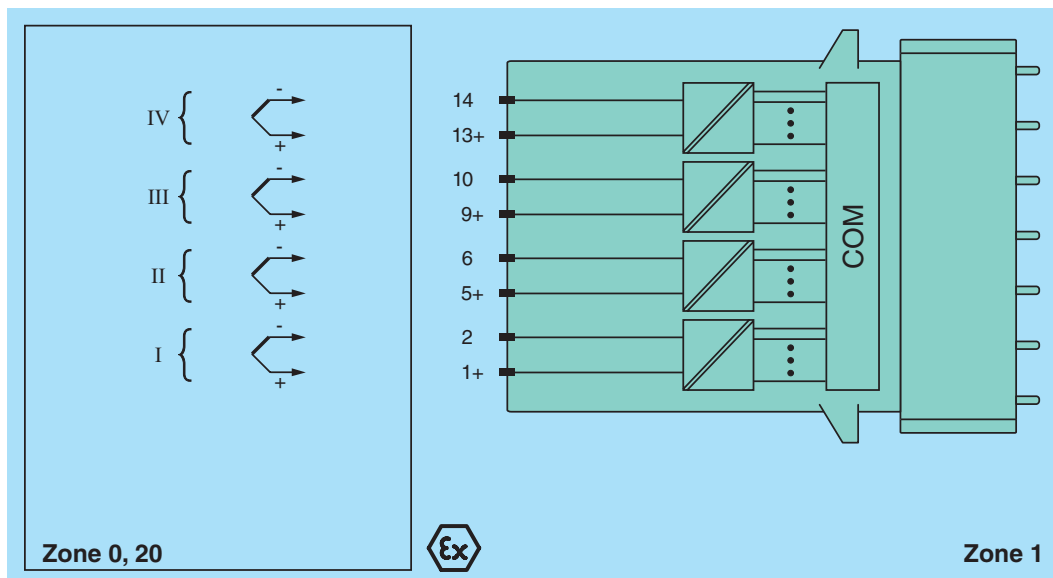

Release date 2018-09-14 09:58 Date of issue 2018-09-14 542109\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.com



Germany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com

<b>Slots</b>	
Occupied slots	2
<b>Supply</b>	
Connection	backplane bus
Rated voltage $U_r$	12 V DC , only in connection with the power supplies FB92**
Power dissipation	0.75 W
Power consumption	0.75 W
<b>Internal bus</b>	
Connection	backplane bus
Interface	manufacturer-specific bus to standard com unit
<b>Input</b>	
Compensation (reference junction CJC)	internal cold junction compensation or external cold junction
<b>temperature input</b>	
Number of channels	4
Suitable field devices	
Field device [2]	Thermocouple
Field device [4]	mV source
Suitable sensors	
Sensor	thermocouples U, B, E, T, K, S, R, L, J, N, Pallaplat and mV sources
Connection	channel I: 1+, 2-; channel II: 5+, 6-; channel III: 9+, 10-; channel IV: 13+, 14-
Measurement range	-65 ... 75 mV with LFD , -75 ... 75 mV without LFD
Smallest span	5 mV for 0.1 % accuracy
Linearity error	0.1 %
Conversion time	≤ 300 ms (4 channels) without LFD ≤ 600 ms (4-channel) with LFD
Compensation (reference junction CJC)	internal cold junction compensation or external cold junction
Line fault detection	can be switched on/off for each channel via configuration tool ,
Open-circuit	> 1 kΩ
<b>Transfer characteristics</b>	
Deviation	
Influence of ambient temperature	max. 0,1 %/10 K
<b>Indicators/settings</b>	
LED indication	LED green: supply LED red: line fault, collective alarm , flashing: communication error
Coding	optional mechanical coding via front socket
<b>Directive conformity</b>	
Electromagnetic compatibility	
Directive 2014/30/EU	EN 61326-1
<b>Conformity</b>	
Electromagnetic compatibility	
Degree of protection	IEC 60529
Environmental test	EN 60068-2-14
Shock resistance	EN 60068-2-27
Vibration resistance	EN 60068-2-6
Damaging gas	EN 60068-2-42
Relative humidity	EN 60068-2-56
<b>Ambient conditions</b>	
Ambient temperature	-20 ... 60 °C (-4 ... 140 °F)
Storage temperature	-25 ... 85 °C (-13 ... 185 °F)
Relative humidity	95 % non-condensing
Shock resistance	shock type I, shock duration 11 ms, shock amplitude 15 g, number of shocks 18
Vibration resistance	frequency range 10 ... 150 Hz; transition frequency: 57.56 Hz, amplitude/acceleration ± 0.075 mm/1 g; 10 cycles frequency range 5 ... 100 Hz; transition frequency: 13.2 Hz amplitude/acceleration ± 1 mm/0.7 g; 90 minutes at each resonance
Damaging gas	designed for operation in environmental conditions acc. to ISA-S71.04-1985, severity level G3
<b>Mechanical specifications</b>	
Degree of protection	IP20 (module) , a separate housing is required acc. to the system description
Connection	removable front connector with screw flange (accessory) wiring connection via spring terminals (0.14 ... 1.5 mm <sup>2</sup> ) or screw terminals (0.08 ... 1.5 mm <sup>2</sup> )
Mass	approx. 750 g
Dimensions	57 x 107 x 132 mm (2.2 x 4.2 x 5.2 inch)
<b>Data for application in connection with hazardous areas</b>	
EU-Type Examination Certificate	PTB 97 ATEX 1074 U

Release date 2018-09-14 09:58 Date of issue 2018-09-14 542109\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Marking	 	
Input		
Voltage	U <sub>o</sub>	1 V
Current	I <sub>o</sub>	71 mA
Power	P <sub>o</sub>	62 mW (trapezoid characteristic curve)
Galvanic isolation		
Input/input	functional insulation acc. to IEC 60664-1:2007, rated insulation voltage 50 V, testing voltage 500 V	
Input/power supply, internal bus	safe electrical isolation acc. to EN 60079-11, voltage peak value 375 V	
Directive conformity		
Directive 2014/34/EU	EN 60079-0:2009 EN 60079-1:2007 EN 60079-11:2007 EN 60079-26:2007 EN 61241-11:2006	
<b>International approvals</b>		
ATEX approval	PTB 97 ATEX 1075 ; PTB 97 ATEX 1074 U	
EAC approval	Russia: RU C-IT.MIII06.B.00129	
Marine approval		
Lloyd Register	15/20021	
DNV GL Marine	TAA0000034	
American Bureau of Shipping	T1450280/UN	
Bureau Veritas Marine	22449/B0 BV	
<b>General information</b>		
System information	The module has to be mounted in appropriate backplanes and housings (FB92**) in Zone 1, 2, 21, 22 or outside hazardous areas (gas or dust). Here, observe the corresponding EC-type examination certificate.	
Supplementary information	EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .	

Release date 2018-09-14 09:58 Date of issue 2018-09-14 542109\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com