



Model Number




SU18-40a/110/115a/126a

Fiber optic sensor
200 mm fixed cable with 4-pin, M8x1 connector


Features

- Basic line for DIN rail installation
- Sleek design
- 3 response times selectable
- High switching frequency
- Self diagnosis function

Dimensions

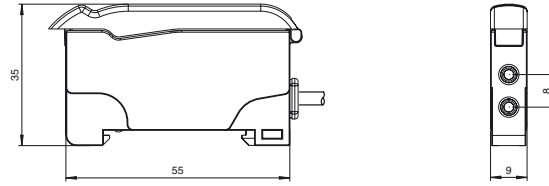

Electrical connection

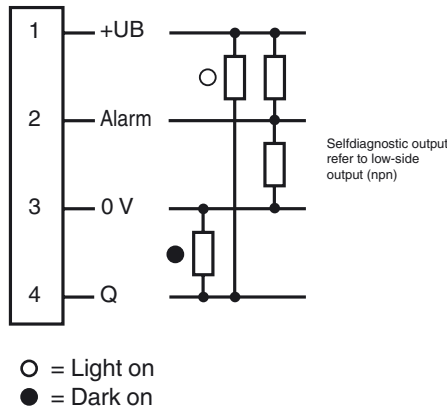

Pinout



Wire colors in accordance with EN 60947-5-2

| | | |
|---|----|---------|
| 1 | BN | (brown) |
| 2 | WH | (white) |
| 3 | BU | (blue) |
| 4 | BK | (black) |

Release date: 2018-01-15 17:07 Date of issue: 2018-01-15 805703_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 4411
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

Technical data**General specifications**

| | |
|---------------------|--------------------------------------|
| Sensor range | up to 150 mm (KLR-C02-2,2-2,0-K146) |
| Detection range | up to 450 mm (KLE-C01-2,2-2,0-K116) |
| Light source | LED |
| Light type | modulated visible red light , 660 nm |
| Ambient light limit | 10000 Lux |

Functional safety related parameters

| | |
|--------------------------------|-------|
| MTTF _d | 690 a |
| Mission Time (T _M) | 20 a |
| Diagnostic Coverage (DC) | 0 % |

Indicators/operating means

| | |
|---------------------|--|
| Operation indicator | LED green, statically lit Power on , Undervoltage indicator: Green LED, pulsing (approx. 0.8 Hz) , short-circuit : LED green flashing (approx. 4 Hz) |
| Function indicator | LED yellow: static illumination switching state, flashes when falling short of the stability control |
| Control elements | Teach-In key slide switch 2 positions: light/dark switching slide switch 3 positions: timer function - timer off, on delay 40 ms, off-delay 40 ms slide switch 3 positions: operating mode - normal, high speed , high resolution |

Electrical specifications

| | | |
|------------------------|----------------|----------------|
| Operating voltage | U _B | 10 ... 30 V DC |
| Ripple | | 10 % |
| No-load supply current | I ₀ | ≤ 30 mA |

Output

| | | |
|-----------------------------|---|---|
| Pre-fault indication output | 1 push-pull (4 in 1) output NPN/PNP , short-circuit protected | |
| Switching type | light/dark on, switchable | |
| Signal output | 1 push-pull (4 in 1) output NPN/PNP , short-circuit protected | |
| Switching voltage | max. 30 V DC | |
| Switching current | max. 100 mA , resistive load | |
| Voltage drop | U _d | ≤ 2 V DC at 100 mA ; ≤ 0.7 V at 10 mA |
| Switching frequency | f | Standard mode: 3 kHz , High speed mode: 6 kHz , High resolution: 500 Hz |
| Response time | | Standard mode: 160 μs , High speed mode: 80 μs , High resolution: 1 ms |
| Repeat accuracy | R | ≤ 0.5 % of adjusted sensor range |

Ambient conditions

| | |
|---------------------|-------------------------------|
| Ambient temperature | -10 ... 55 °C (14 ... 131 °F) |
| Storage temperature | -20 ... 70 °C (-4 ... 158 °F) |

Mechanical specifications

| | |
|----------------------|--|
| Housing width | 9 mm |
| Housing height | 34.5 mm |
| Housing depth | 62.3 mm |
| Degree of protection | IP50 |
| Connection | 200 mm, PVC cable with M8 connector, 4-pin |
| Material | |
| Housing | PC |
| Mass | 45 g |

Compliance with standards and directives

| | |
|---------------------|---|
| Standard conformity | |
| Product standard | EN 60947-5-2:2007 IEC 60947-5-2:2007 |

Approvals and certificates

| | |
|--------------|--|
| UL approval | cULus Listed, Class 2 Power Source, Type 1 enclosure |
| CCC approval | CCC approval / marking not required for products rated ≤36 V |

Accessories**HPF-D032**

KLR-C02-2,2-2,0-K146
Plastic fiber optic - diffuse

KLR-C02-2,2-2,0-K70
Plastic fiber optic - diffuse

KLR-C02-1,0-2,0-K75
Plastic fiber optic - diffuse

KLR-C09-1,25-2,0-K76
Plastic fiber optic - diffuse

KLR-C09-1,25-2,0-K74
Plastic fiber optic - diffuse

KLR-C16-2,2-2,0-K71
Plastic fiber optic - diffuse

KLR-A32-2,2-2,0-K83
Plastic fiber optic - diffuse

KHR-C02-2,2-2,0-K131
Plastic fiber optic - diffuse

KHTR-C02-2,2-2,0-K88
Plastic fiber optic - diffuse

LHR 00-0,8-1,0-20M4
Glass fiber optic - diffuse with silicon covering

KLE-C01-2,2-2,0-K116
Plastic fiber optic - thru-beam

KLE-C01-2,2-2,0-K103
Plastic fiber optic - thru-beam

KLE-C01-2,2-2,0-K102
Plastic fiber optic - thru-beam

KLE-C01-2,2-2,0-K100
Plastic fiber optic - thru-beam

KLE-C01-2,2-2,0-K101
Plastic fiber optic - thru-beam

KLE-C01-2,2-2,0-K113
Plastic fiber optic - thru-beam

KLE-C01-1,0-2,0-K120
Plastic fiber optic - thru-beam

KHE-C01-2,2-2,0-K122
Plastic fiber optic - thru-beam

KHTE-C01-2,2-2,0-K118
Plastic fiber optic - thru-beam

LHE 00-1,1-1,0-20M4
Glass fiber optic - thru-beam with silicon covering


Bracket SU
Mounting bracket for DIN rail

Other suitable accessories can be found at
www.pepperl-fuchs.com


Curves/Diagrams

Self-Diagnostic definition and operation:


5 sec. rule for light-ON (LO) and dark-ON (DO) mode

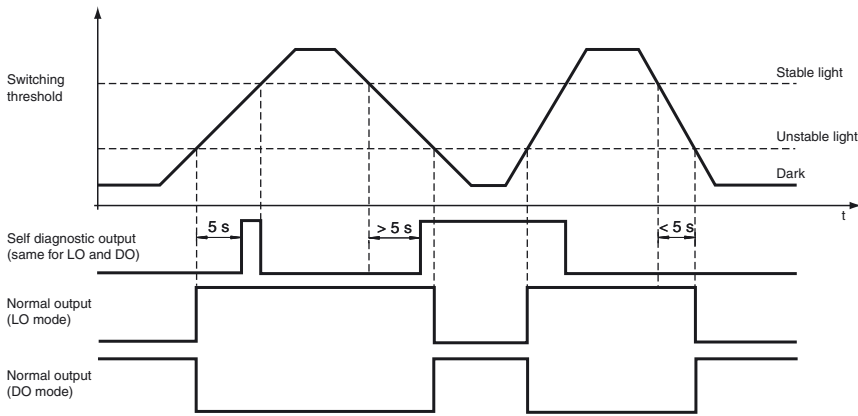

8 cyc. rule for light-ON (LO) and dark-ON (DO) mode

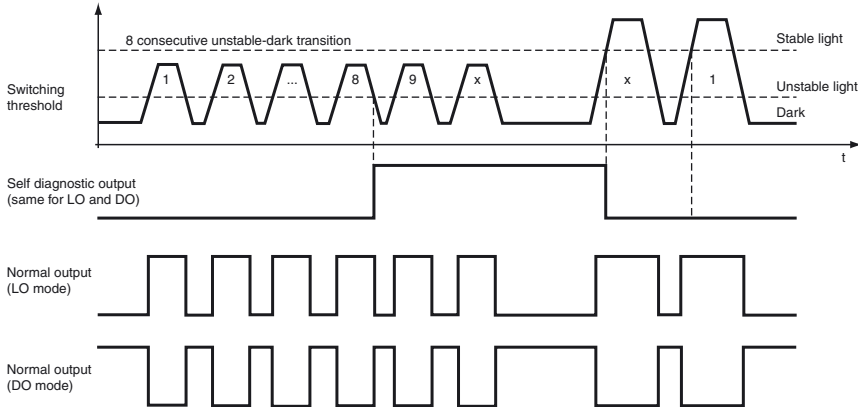

LED indicators and operating chart:

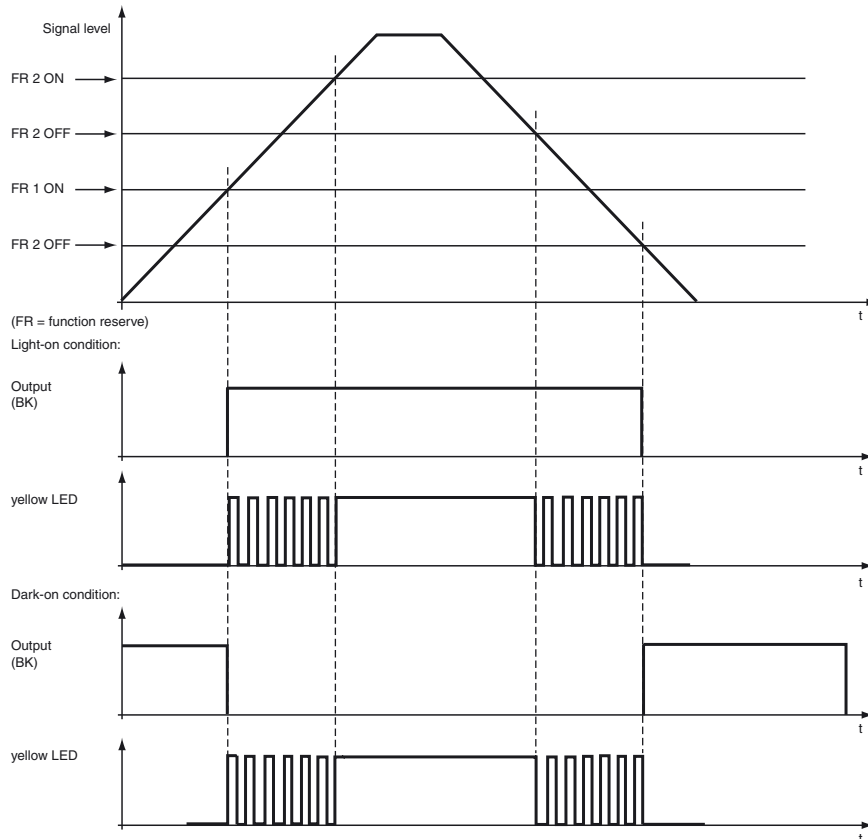

Release date: 2018-01-15 17:07 Date of issue: 2018-01-15 805703_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Teach-in procedures

(for Auto Teach version only):

Dynamic Teach in High Resolution mode:

1. Place a target
2. Press and hold the Teach button for > 2 seconds to enter Teach mode. Both LEDs will indicate fast inphase blinking follow by slow in-phase blinking. If the target is too near (strong signal), the fast blinking will last slightly longer follow by slow blinking
3. Remove target or move target further away from sensor
4. Press and hold the Teach button for < 2 seconds to end Teach mode. Both LEDs will indicate fast inphase blinking and then alternate blinking to signal end of Teach mode

Dynamic Teach in Normal mode:

1. Press and hold the Teach button for > 2 seconds to enter Teach mode. Both LEDs will indicate fast inphase blinking follow by slow in-phase blinking
2. Pass a moving target
3. Press and hold the Teach button for < 2 seconds to end Teach mode. Both LEDs will indicate alternate blinking to signal end of Teach mode

Maximum Teach:

1. Remove target
2. Press and hold the Teach button for > 2 seconds to enter Teach mode. Both LEDs will indicate fast inphase blinking follow by slow in-phase blinking
3. Press and hold the Teach button for > 2 seconds to end Teach mode. Both LEDs will indicate fast inphase blinking and then alternate blinking to signal end of Teach mode

Position Teach:

1. Place a target
2. Press and hold the Teach button for > 2 second to enter Teach mode. Both LEDs will indicate fast inphase blinking follow by slow in-phase blinking. If the target is too near (strong signal), the fast blinking will last slightly longer follow by slow blinking
3. Press and hold the Teach button for > 2 seconds to end Teach mode. Both LEDs will indicate fast inphase blinking and then alternate blinking to signal end of Teach mode

Indications for the Green and Yellow LEDs in detection mode (normal operation):

- Yellow LED is stable ON to indicate that signal received is > FR2
- Yellow LED will flash at 4 Hz to indicate function reserve, FR1 < signal level < FR2
- Green LED stable ON to indicate power supply is ON, sensor is ready.
- Green LED will flash once for each key actuation, e.g. actuation of the Teach button
- Green LED will flash at 4 Hz to indicate a short-circuit fault at the output(s)
- Green LED will flash at 0.8 Hz to indicate an under voltage fault at the power supply

Indications for the Green and Yellow LEDs in the Teach Mode:

- Yellow & Green LEDs in-phase blinking indicates that the sensor has entered the Teach Mode
- Slow Yellow & Green LEDs in-phase blinking indicates that the sensor is ready or it is waiting to learn new information about the target and/or the background
- Fast Yellow & Green LEDs in-phase blinking means that the sensor is in the progress of learning new target. When the learning is complete, slow in-phase blinking will be resumed as before
- Green & Yellow LEDs flash alternately at 8 Hz indicates there has been a Teach fault or Teach error

Selection table - thru-beam fiber optic cable

| Head shape | Moun-ting | Model number | Core | Detection distance | Fiber cross section | minimum Object size | Fiber optic length | Bend radius | Dimensions | Special features |
|-----------------------|-----------|----------------------|------|--------------------|---------------------|---------------------|--------------------|-------------|------------|---|
| Highly precise | | | | | | | | | | |
| Threaded | M3 | KLE-C01-1.0-2.0-K120 | PMMA | 20 mm | 0.25 mm | 0.05 mm | 2 m | min. 10 mm | | |
| Threaded | M4 | KLE-C01-1.0-2.0-K119 | PMMA | 20 mm | 0.25 mm | 0.05 mm | 2 m | min. 10 mm | | 4 x high Detection range with Auxiliary lens K-LA01/ 8 x high Detection range with Auxiliary lens K-LA06/ Side view / Periscope with K-LA02 |
| Threaded | M3 x 0.5 | KLE-C04-1.0-2.0-K104 | PMMA | 70 mm | 4 x 0.25 mm | 0.12 mm | 2 m | min. 15 mm | | |

Release date: 2018-01-15 17:07 Date of issue: 2018-01-15 805703_eng.xml

| Head shape | Moun-ting | Model number | Core | Detection distance | Fiber cross section | minimum Object size | Fiber optic length | Bend radius | Dimensions | Special features |
|------------------------|-----------------|----------------------|------|--------------------|---------------------|---------------------|--------------------|-------------|------------|---|
| Cylindrical | dia. 2 mm | KLE-C01-1.0-2.0-K105 | PMMA | 20 mm | 0.25 mm | 0.05 mm | 2 m | min. 10 mm | | |
| Cylindrical | dia. 1.5 mm | KLE-C01-1.0-2.0-K107 | PMMA | 20 mm | 0.25 mm | 0.05 mm | 2 m | min. 10 mm | | |
| Cylindrical | dia. 1.5 mm | KLE-C04-1.0-2.0-K108 | PMMA | 70 mm | 4 x 0.25 mm | 0.12 mm | 2 m | min. 15 mm | | |
| Cylindrical | dia. 2 mm | KLE-C04-1.0-2.0-K106 | PMMA | 70 mm | 4 x 0.25 mm | 0.05 mm | 2 m | min. 15 mm | | |
| Highly flexible | | | | | | | | | | |
| Threaded | M3 | KHE-C01-1.0-2.0-K125 | PMMA | 50 mm | 0.5 mm | 0.15 mm | 2 m | min. 1 mm | | only 1 mm Bend radius |
| Threaded | M3 | KHE-C01-2.2-2.0-K122 | PMMA | 200 mm | 1 mm | 0.25 mm | 2 m | min. 2 mm | | only 2 mm Bend radius |
| Threaded | M4 x 0.7 / M2.6 | KHE-C01-1.0-2.0-K124 | PMMA | 50 mm | 0.5 mm | 0.15 mm | 2 m | min. 1 mm | | 4 x high Detection range with Auxiliary lens K-LA01/ 8 x high Detection range with Auxiliary lens K-LA06 Side view / Periscope with K-LA02/ only 1 mm Bend radius |
| Threaded | M6 | KHE-C01-2.2-2.0-K121 | PMMA | 200 mm | 1.0 mm | 0.25 mm | 2 m | min. 2 mm | | only 2 mm Bend radius |
| Cylindrical | dia. 1.5 mm | KHE-C01-1.0-2.0-K139 | PMMA | 50 mm | 0.5 mm | 0.05 mm | 2 m | min. 1 mm | | only 1 mm Bend radius |
| Cylindrical | dia. 3 mm | KHE-C01-2.2-2.0-K126 | PMMA | 50 mm | 0.5 mm | 0.15 mm | 2 m | min. 1 mm | | only 1 mm Bend radius |
| Cylindrical | dia. 3 mm | KHE-C01-2.2-2.0-K123 | PMMA | 200 mm | 1 mm | 0.25 mm | 2 m | min. 2 mm | | only 2 mm Bend radius |

Release date: 2018-01-15 17:07 Date of issue: 2018-01-15 805703_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 4411
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

| Head shape | Moun- ting | Model number | Core | Detection distance | Fiber cross section | minimum Object size | Fiber optic length | Bend radius | Dimensions | Special features |
|-----------------------------|-------------------|------------------------------|------|-----------------------|---------------------------|------------------------|--------------------------|----------------|------------|---|
| Right angle | dia. 15 x 5 | KHE-C01- 2.2-2.0- K137 | PMMA | 35 mm | 0.5 mm | 0.15 mm | 2 m | min. 1 mm | | only 1 mm Bend radius |
| Right angle | dia. 15 x 5 | KHE-C01- 2.2-2.0- K140 | PMMA | 150 mm | 1 mm | 0.25 mm | 2 m | min. 2 mm | | only 2 mm Bend radius |
| Flexible | | | | | | | | | | |
| Threaded | M3 x 0.5 /M2.6 | KLE-C01- 1.3-2.0- K112 | PMMA | 200 mm | 1 mm | 0.25 mm | 2 m | min. 25 mm | | 4 x high Detection range with Auxili- ary lens K-LA01/ 8 x high Detection range with Auxili- ary lens K-LA06 Side view / Peris- cope with K-LA02 |
| Threaded | M3 x 0.5 | KLE-C01- 2.2-2.0- K103 | PMMA | 220 mm | 1 mm | 0.25 mm | 2 m | min. 25 mm | | |
| Threaded | M4 x 0.7 /M2.6 | KLE-C01- 2.2-2.0- K102 | PMMA | 220 mm | 1 mm | 0.25 mm | 2 m | min. 25 mm | | 4 x high Detection range with Auxili- ary lens K-LA01/ 8 x high Detection range with Auxili- ary lens K-LA06 Side view / Peris- cope with K-LA02 |
| Threaded | M6 | KLE-C01- 2.2-2.0- K100 | PMMA | 220 mm | 1 mm | 0.32 mm | 2 m | min. 25 mm | | |
| Threaded | M2.6 | KLE-C01- 2.2-2.0- K113 | PMMA | 200 mm | 1 mm | 0.25 mm | 2 m | min. 25 mm | | 4 x high Detection range with Auxili- ary lens K-LA01/ 8 x high Detection range with Auxili- ary lens K-LA06 Side view / Peris- cope with K-LA02 |
| Cylindrical | dia. 2 mm | KLE-C01- 1.3-2.0- K114 | PMMA | 220 mm | 1 mm | 0.25 mm | 2 m | min. 25 mm | | |
| Cylindrical | dia. 5 mm | KLE-C01- 2.2-2.0- K101 | PMMA | 220 mm | 1 mm | 0.32 mm | 2 m | min. 25 mm | | |
| Bendable tip | | | | | | | | | | |
| Threaded | M4 | KLE 00-2.2- 2.0-K55 | PMMA | 228 mm | 1 mm | | 2 m | min. 25 mm | | |
| High detection range | | | | | | | | | | |
| Threaded | M3 | KLE-C01- 2.2-2.0- K116 | PMMA | 450 mm | 1.5 mm | 0.35 mm | 2 m | min. 40 mm | | |

Release date: 2018-01-15 17:07 Date of issue: 2018-01-15 805703_eng.xml

| Head shape | Moun-ting | Model number | Core | Detection distance | Fiber cross section | minimum Object size | Fiber optic length | Bend radius | Dimensions | Special features |
|------------------------------------|--------------|-----------------------|------|--|---------------------|---------------------|--------------------|-------------|------------|-----------------------|
| Threaded | M6 | KLE-C01-2.2-2.0-K115 | PMMA | 450 mm | 1.5 mm | 0.35 mm | 2 m | min. 40 mm | | |
| Threaded | M8 x 1 | FEF-PLT1 | PMMA | 6000 mm calculated value related on 2 m Fiber optic length | 1 mm | | 1 m | min. 25 mm | | Narrow beam |
| Threaded | M8 x 1 | FEF-PLT1-L2 | PMMA | 6000 mm calculated value related on 2 m Fiber optic length | 1 mm | | 2 m | min. 25 mm | | Narrow beam |
| Threaded | M8 x 1 | FEF-PLT1-L5 | PMMA | 6000 mm calculated value related on 2 m Fiber optic length | 1 mm | | 4 m | min. 25 mm | | Narrow beam |
| Cylindrical | dia. 3 mm | KLE-C01-2.2-2.0-K117 | PMMA | 400 mm | 1.5 mm | 0.35 mm | 2 m | min. 25 mm | | |
| Side view / Periscope | | | | | | | | | | |
| Cylindrical | dia. 4.75 mm | KHE-C01-2.2-2.0-K136 | PMMA | 50 mm | 0.5 mm | 0.15 mm | 2 m | min. 1 mm | | only 1 mm Bend radius |
| Array | | | | | | | | | | |
| Rectangular | 3 x M2 x 0.5 | KLE-A16-2.2-2.0-K109 | PMMA | 100 mm | 16 x 0.25 mm | 0.05 mm | 2 m | min. 25 mm | | |
| Rectangular | 3 x M3 x 0.5 | KLE-A16-2.2-2.0-K110 | PMMA | 100 mm | 16 x 0.25 mm | 0.05 mm | 2 m | min. 25 mm | | |
| Rectangular | 3 x M3 x 0.5 | KLE-A16-2.2-2.0-K111 | PMMA | 100 mm | 16 x 0.25 mm | 0.05 mm | 2 m | min. 25 mm | | |
| Rectangular | 2 x 3.2 mm | KLE-A32-2.2-2.0-K142 | PMMA | 35 mm | 32 x 0.25 mm | | 2 m | min. 25 mm | | |
| High temperature resistance | | | | | | | | | | |
| Cylindrical | dia. 3 mm | KHTE-C01-2.2-2.0-K118 | PMMA | 115 mm | 1 mm | 0.35 mm | 2 m | min. 25 mm | | -55°C ... + 115 °C |
| Sturdy design | | | | | | | | | | |

Release date: 2018-01-15 17:07 Date of issue: 2018-01-15 805703_eng.xml

| Head shape | Moun-ting | Model number | Core | Detection distance | Fiber cross section | minimum Object size | Fiber optic length | Bend radius | Dimensions | Special features |
|-----------------------|----------------|-----------------------|-------|--------------------|---------------------|---------------------|--------------------|-------------|------------|--|
| Threaded | M3 | LHE 00-1.1-1.0-14M3 | glass | 195 mm | 1.1 mm | | 1 m | 4 mm static | | - 40°C ... + 180 °C |
| Threaded | M4 x 0.7 /M2.6 | LHE 00-1.1-1.0-20M4 | glass | 195 mm | 1.1 mm | | 1 m | 4 mm static | | 4 x high Detection range with Auxillary lens K-LA01/ 8 x high Detection range with Auxillary lens K-LA06 Side view / Periscope with K-LA02/ - 40°C ... + 180 °C |
| Threaded | M6 | LHE 00-1.1-1.0-G | glass | 195 mm | 1.1 mm | | 1 m | 4 mm static | | - 40°C ... + 180 °C |
| Cylindrical | dia. 1.5 mm | LHE 00-1.1-1.0-10C1.5 | glass | 195 mm | 1.1 mm | | 1 m | 4 mm static | | - 40°C ... + 180 °C |
| Cylindrical | dia. 3 mm | LHE 00-1.1-1.0-15C3 | glass | 195 mm | 1.1 mm | | 1 m | 4 mm static | | - 40°C ... + 180 °C |
| Right angle | Bar 3 mm | LHE 00-1.1-1.0-WC3 | glass | 195 mm | 1.1 mm | | 1 m | 4 mm static | | - 40°C ... + 180 °C |
| Right angle | Bar 10 mm | LHE 00-1.1-1.0-K9 | glass | 195 mm | 1.1 mm | | 1 m | 4 mm static | | - 40°C ... + 180 °C |
| Special design | | | | | | | | | | |
| Rectangular | 2 x 2.2 mm | KHE-A01-1.0-2.0-K138 | PMMA | 25 mm | 0.5 mm | 0.05 mm | 2 m | min. 1 mm | | only 1 mm Bend radius |
| Slot | 2 x 3.2 mm | KLE-C02-1.25-2.0-K134 | PMMA | 5 mm | 2 x 0.25 m | | 2 m | min. 10 mm | | |
| Slot | 2 x 3.2 mm | KLE-C02-1.25-2.0-K135 | PMMA | 10 mm | 2 x 0.25 m | | 2 m | min. 10 mm | | |

Diffuse Mode Sensor Selection Table

| Head type | Mounting | Designation | Core | Sensing range | Fiber cross-section | Length of fiber optics | Bending radius | Dimensional drawing | Special Properties |
|----------------|----------|-------------|------|---------------|---------------------|------------------------|----------------|---------------------|--------------------|
| High-precision | | | | | | | | | |

Release date: 2018-01-15 17:07 Date of issue: 2018-01-15 805703_eng.xml

| Head type | Mounting | Designation | Core | Sensing range | Fiber cross-section | Length of fiber optics | Bending radius | Dimensional drawing | Special Properties |
|----------------|-----------------|----------------------|------|---------------|--|------------------------|----------------|---------------------|--|
| Thread | M3 x 0.5 | KLR-C02-1.0-2.0-K75 | PMMA | 4 mm | 2 x 0.25 m | 2 m | At least 10 mm | | |
| Thread | M4 x 0.7 | KLR-C02-1.0-2.0-K73 | PMMA | 4 mm | 2 x 0.25 mm | 2 m | At least 10 mm | | |
| Thread | M3 x 0.5 | KLR-C04-1.25-2.0-K78 | PMMA | 8 mm | 4 x 0.25 m | 2 m | At least 15 mm | | |
| Cylindrical | Dia. 2.0 mm | KLR-C02-1.0-2.0-K91 | PMMA | 4 mm | 2 x 0.25 mm | 2 m | At least 10 mm | | |
| Cylindrical | Dia. 3.0 mm | KLR-C02-1.0-2.0-K90 | PMMA | 4 mm | 2 x 0.25 mm | 2 m | At least 10 mm | | |
| Cylindrical | Dia. 1.5 mm | KLR-C04-1.25-2.0-K80 | PMMA | 8 mm | 4 x 0.25 mm | 2 m | At least 15 mm | | |
| Cylindrical | Dia. 1.5 mm | KLR-C04-1.0-2.0-K133 | PMMA | 7 mm | 4 x 0.25 mm | 2 m | At least 15 mm | | |
| Cylindrical | Dia. 2.0 mm | KLR-C02-1.0-2.0-K87 | PMMA | 25 mm | 2 x 0.5 mm | 2 m | At least 15 mm | | |
| Cylindrical | Dia. 3.0 mm | KLR-C04-1.25-2.0-K79 | PMMA | 8 mm | 4 x 0.25 mm | 2 m | At least 15 mm | | |
| Coaxial | | | | | | | | | |
| Thread | M3 x 0.5 | KLR-C09-1.25-2.0-K76 | PMMA | 30 mm | 1 x 0.5 mm emitter 9 x 0.25 mm receiver | 2 m | At least 15 mm | | Only 0.5 mm light spot at 8 mm With auxiliary lens K-LA03 |
| Thread | M4 x 0.7 / M2.6 | KLR-C09-1.25-2.0-K74 | PMMA | 30 mm | 1 x 0.5 mm emitter 9 x 0.25 mm receiver | 2 m | At least 15 mm | | Only 0.7 mm light spot at 10 mm with auxiliary lens K-LA04/ two times higher detection range with auxiliary lens K-LA01/ three times higher detection range with auxiliary lens K-LA06 |

Release date: 2018-01-15 17:07 Date of issue: 2018-01-15 805703_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 4411
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

| Head type | Mounting | Designation | Core | Sensing range | Fiber cross-section | Length of fiber optics | Bending radius | Dimensional drawing | Special Properties |
|------------------------|-------------|----------------------|------|---------------|---|------------------------|----------------|---------------------|--------------------|
| Thread | M6 x 0.75 | KLR-C16-2.2-2.0-K71 | PMMA | 85 mm | 1 x 1.0 mm emitter 16 x 0.25 mm receiver | 2 m | At least 25 mm | | |
| Cylindrical | Dia. 1.0 mm | KLR-C06-1.25-2.0-K81 | PMMA | 20 mm | 1 x 0.25 mm emitter 6 x 0.25 mm receiver | 2 m | At least 15 mm | | |
| Cylindrical | Dia. 3.0 mm | KLR-C09-1.25-2.0-K77 | PMMA | 30 mm | 1 x 0.5 mm emitter 9 x 0.25 mm receiver | 2 m | At least 15 mm | | |
| Cylindrical | Dia. 5.0 mm | KLR-C16-2.2-2.0-K72 | PMMA | 85 mm | 1 x 1.0 mm emitter 16 x 0.25 mm Receiver | 2 m | At least 25 mm | | |
| Highly flexible | | | | | | | | | |
| Thread | M3 | KHR-C02-1.0-2.0-K96 | PMMA | 12 mm | 2 x 0.5 mm | 2 m | At least 1 mm | | |
| Thread | M4 | KHR-C02-1.0-2.0-K95 | PMMA | 12 mm | 2 x 0.5 mm | 2 m | At least 1 mm | | |
| Thread | M4 | KHR-C02-1.3-2.0-K92 | PMMA | 60 mm | 2 x 1.0 mm | 2 m | At least 2 mm | | |
| Thread | M6 | KHR-C02-2.2-2.0-K94 | PMMA | 12 mm | 2 x 0.5 mm | 2 m | At least 1 mm | | |
| Cylindrical | Dia. 3.0 mm | KHR-C02-1.3-2.0-K93 | PMMA | 60 mm | 2 x 1.0 mm | 2 m | At least 2 mm | | |
| Flexible | | | | | | | | | |
| Thread | M6 x 0.75 | KLR-C02-2.2-2.0-K70 | PMMA | 80 mm | 2 x 1.0 mm | 2 m | At least 25 mm | | |
| Cylindrical | Dia. 3.0 mm | KLR-C02-1.3-2.0-K86 | PMMA | 80 mm | 2 x 1.0 mm | 2 m | At least 25 mm | | |

Release date: 2018-01-15 17:07 Date of issue: 2018-01-15 805703_eng.xml

| Head type | Mounting | Designation | Core | Sensing range | Fiber cross-section | Length of fiber optics | Bending radius | Dimensional drawing | Special Properties |
|---------------------------------------|--------------|-----------------------|------|---------------|---------------------|------------------------|----------------|---------------------|--------------------------|
| Cylindrical | Dia. 5.0 mm | KLR-C02-2.2-2.0-K85 | PMMA | 80 mm | 2 x 1.0 mm | 2 m | At least 25 mm | | |
| | | | | | | | | | |
| Thread | M3 x 0.5 | KLR 00-1.0-2.0-K58 | PMMA | 20 mm | | 2 m | At least 15 mm | | |
| Thread | M6 | KLR 00-2.2-2.0-K57 | PMMA | 60 mm | | 2 m | At least 15 mm | | |
| Long detection range | | | | | | | | | |
| Thread | | KLR-C02-2.2-2.0-K146 | PMMA | 150 mm | | 2 m | At least 40 mm | | |
| Thread | | KLR-C10-1.25-2.0-K144 | PMMA | 30 mm | | 2 m | At least 15 mm | | |
| Lateral optical face | | | | | | | | | |
| Thread | M6 | KHR-C02-2.2-2.0-K131 | PMMA | 60 mm | 2 x 1.0 mm | 2 m | At least 2 mm | | Only 2 mm bending radius |
| Thread | Dia. 5.0 mm | KHR-C02-1.0-2.0-K132 | PMMA | 15 mm | 2 x 0.5 mm | 2 m | At least 1 mm | | Only 1 mm bending radius |
| Array | | | | | | | | | |
| Cubic | 3 x M2 x 0.5 | KLR-A18-1.3-2.0-K82 | PMMA | 25 mm | 18 x 0.25 mm | 2 m | At least 25 mm | | |
| Cubic | 3 x M3 x 0.5 | KLR-A32-2.2-2.0-K83 | PMMA | 35 mm | 10.85 mm | 2 m | At least 25 mm | | |
| Cubic | 2 x 3.2 mm | KLR-A32-2.2-2.0-K141 | PMMA | 35 mm | 16 x 0.25 mm | 2 m | At least 25 mm | | |
| Resistant to high temperatures | | | | | | | | | |

Release date: 2018-01-15 17:07 Date of issue: 2018-01-15 805703_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 4411
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

| Head type | Mounting | Designation | Core | Sensing range | Fiber cross-section | Length of fiber optics | Bending radius | Dimensional drawing | Special Properties |
|-----------------------|--------------|-----------------------|-------|---------------|---------------------|------------------------|----------------|---------------------|---|
| Thread | M6 | KHTR-C02-2.2-2.0-K88 | PMMA | 80 mm | 2 x 1.0 mm | 2 m | At least 25 mm | | - 55 °C ... + 115 °C |
| Cylindrical | Dia. 5.0 mm | KHTR-C02-2.2-2.0-K89 | PMMA | 80 mm | 2 x 1.0 mm | 2 m | At least 25 mm | | - 55 °C ... + 115 °C |
| Robust design | | | | | | | | | |
| Thread | M3 x 0.5 | LHR 00-0.8-1.0-14M3 | Glass | 40 mm | 0.8 mm | 1 m | 4 mm static | | - 40 °C ... + 180 °C |
| Thread | M4 x 0.7 | LHR 00-0.8-1.0-20M4 | Glass | 40 mm | 0.8 mm | 1 m | 4 mm static | | - 40 °C ... + 180 °C |
| Thread | M6 | LHR 00-1.1-1.0-G | Glass | 70 mm | 1.1 mm | 1 m | 4 mm static | | - 40 °C ... + 180 °C |
| Cylindrical | Dia. 4.5 mm | LHR 00-1.1-1.0-K1 | Glass | 70 mm | 1.1 mm | 1 m | 4 mm static | | - 40 °C ... + 180 °C |
| Special design | | | | | | | | | |
| Cubic | | KHR-C02-1.0-2.0-K129 | PMMA | 5 ~ 10 mm | 2 x 0.5 mm | 2 m | At least 1 mm | | Crossed light beam for background suppression Only 1 mm bending radius |
| Cubic | | KLR-C02-1.3-2.0-K130 | PMMA | 1 ~ 8 mm | 2 x 1.0 mm | 2 m | At least 25 mm | | Crossed light beam for background suppression |
| Cubic | 3 x M3 x 0.5 | KHR-A02-2.2-2.0-K127 | PMMA | 50 mm | 2 x 1.0 mm | 2 m | At least 2 mm | | Only 2 mm bending radius |
| Cubic | | KLR-C02-1.25-2.0-K128 | PMMA | 4 ~ 26 mm | 2 x 0.5 mm | 2 m | At least 15 mm | | Fill level measurement |
| Cylindrical | | KLR-C02-1.25-2.0-K147 | PMMA | | | 2 m | At least 40 mm | | Fill level detection |

Release date: 2018-01-15 17:07 Date of issue: 2018-01-15 805703_eng.xml