



### Model Number


**IQC22-22CT-T9**

Data carrier

### Features

- Operating frequency 13.56 MHz
- Conforms to ISO 15693
- 64 bit Fixcode
- 2 kBit memory available
- Readable and writable from both sides
- Degree of protection IP67 / IP68 / IP69K
- With extended temperature range up to 220 °C (428 °F)
- Potted housing

### Dimensions

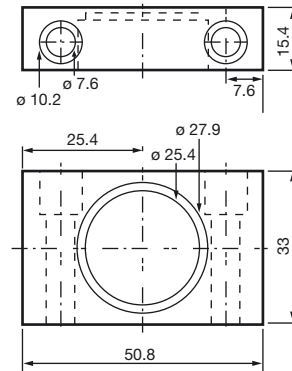

### Technical data

#### General specifications

Operating frequency	13.56 MHz
Transfer rate	26 kBit/s

#### Memory

Chip Type	Tag-it HF-I Plus (Texas Instruments)
EEPROM	2 kBit
UID	64 Bit
Memory organization	4 bytes/block
Read cycles	unlimited
Write cycles	> 100000
Data retention period	10 years at 25 °C (77 °F)

#### Standard conformity

Degree of protection	EN 60529
RFID	ISO/IEC 15693-1:2010 , ISO/IEC 15693-2:2006 , ISO/IEC 15693-3:2009 , ISO/IEC 18000-3

#### Ambient conditions

Ambient temperature	-25 ... 90 °C (-13 ... 194 °F)
Storage temperature	-25 ... 120 °C (-13 ... 248 °F) 160 °C (433 K) for 50 hours 220 °C (493 K) for 30 seconds
Climatic conditions	Isostatic water pressure: 45 bar for 10 hours
Shock and impact resistance	Oscillation (sinus): 10 g, 10 - 2000 Hz in accordance with EN 60068-2-6 Shock (semi-sinus): 100 g, 6 ms in accordance with EN 60068-2-27


#### Mechanical specifications

Degree of protection	IP68 / IP69K
Material	
Housing	Nylotron
Encapsulation compound	Epoxy
Installation	
On metal	yes
In air	yes
Mass	31 g
Construction type	Rectangular type

**Read/write distances**

- ① IQH1-18GM-V1    ② IQH1-F61-V1    ③ IQH1-FP-V1
- ④ IQH1-F15-V1

Reading range in air IQC22-22-T9

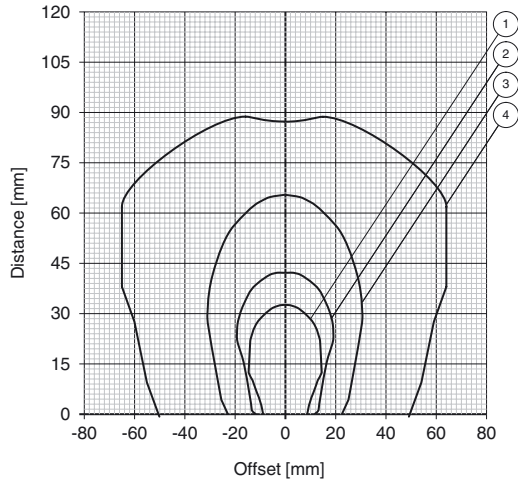

Release date: 2019-01-24 10:22 Date of issue: 2019-01-25 913213\_eng.xml