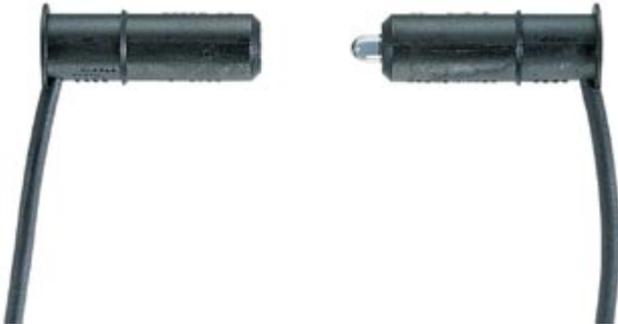


## Datasheet - SE-SET VER.2.0 3M/10.5M

Safety-related tactile sensor / Safety edges / SE-SET / SE-SET

 Preferred typ

• Transmitter + receiver

(Minor differences between the printed image and the original product may exist!)

### Ordering details

Product type description	SE-SET VER.2.0 3M/10,5M
Article number	101179373
EAN Code	4030661312064
eCl@ss	27-27-92-91

### Global Properties

Permanent light	SE-SET VER.2.0
Materials	
- Material of the housings	Polyurethane
Weight	150

### Mechanical data

Cable length	
- Transmitter	10.5
- Receiver	3
Cable section	
- Min. Cable section	
- Max. Cable section	3 x 0,14

### Ambient conditions

Ambient temperature	
- Min. environmental temperature	-25
- Max. environmental temperature	+75
Protection class	IP68

### Dimensions

## Dimensions

- Length	37 mm
- Durchmesser	11.5 mm

## Documents

---

**Operating instructions and Declaration of conformity (jp)** 263 kB, 09.09.2014

Code: mrl\_se40-70\_jp

**Operating instructions and Declaration of conformity (fr)** 218 kB, 03.12.2014

Code: mrl\_se40-70\_fr

**Operating instructions and Declaration of conformity (it)** 219 kB, 28.08.2014

Code: mrl\_se40-70\_it

**Operating instructions and Declaration of conformity (de)** 205 kB, 29.07.2014

Code: mrl\_se40-70\_de

**Operating instructions and Declaration of conformity (cn)** 258 kB, 24.06.2015

Code: mrl\_se40-70\_cn

**Operating instructions and Declaration of conformity (es)** 221 kB, 28.08.2014

Code: mrl\_se40-70\_es

**Operating instructions and Declaration of conformity (nl)** 201 kB, 16.10.2014

Code: mrl\_se40-70\_nl

**Operating instructions and Declaration of conformity (en)** 203 kB, 29.07.2014

Code: mrl\_se40-70\_en

## Images

---



Images (miscellaneous)

---

K.A. Schmersal GmbH & Co. KG, Möddinghofe 30, D-42279 Wuppertal

The data and values have been checked thoroughly. Technical modifications and errors excepted.

Generiert am 13.02.2019 - 14:40:57h Kasbase 3.3.0.F.64l