


Datasheet - IFL 15-333-11YNG

Inductive proximity switch / Housing construction form: Block / IFL 333




(Minor differences between the printed image and the original product may exist!)

- **NOTICE: Not available!**
- Design 333
- 1 Cable entry M 20 x 1.5
- Thermoplastic enclosure
- DC 4-wire
- Double-insulated 

Ordering details

Product type description	IFL 15-333-11YNG
NOTICE: Not available!	
Article number	101055048
EAN Code	4030661003160
eCl@ss	27-27-01-01

Global Properties

Permanent light	IFL - 333
Standards	IEC/EN 60947-5-2; DIN VDE 0660-208
Compliance with the Directives (Y/N) 	Yes
Operating resource protection class	Protection class 2
Materials	
- Material of the housings	Plastic
- Material of the cover	Luran
Housing coating	None
Housing construction form	Block
Weight	155

Mechanical data

Design of electrical connection	Screw connection
Conductor with strain relief	No
Cable section	

- Min. Cable section	
- Max. Cable section	2 x 1.5
mechanical installation conditions	flush
Switch distance S_n	15 mm
Reduction factor 1 met (Y/N)	No
Protection circuit	inductive interference protection, Protection against polarity reversal
Pressure resistant (Y/N)	No
• Wiring compartment	

Ambient conditions

Ambient temperature	
- Min. environmental temperature	-25
- Max. environmental temperature	+70
Protection class	IP65 to IEC/EN 60529

Electrical data

Design of control element	Normally open contact (NO) and Opener (NC) (antivalent)
Number of wire	4
Voltage type	DC, direct current
Supply voltage U_B	
- Min. supply voltage	10
- Max. supply voltage	60
Switch frequency	approx. 100 HZ
Voltage drop U_d	approx. 1.5 V (400 mA)
Operating current I_e	400 mA
No-load current I_o	approx. 5.5 mA (24 V)

Outputs

Design of control output	NPN
--------------------------	-----

LED switching conditions display

LED switching conditions display (Y/N)	Yes
- yellow LED	

ATEX

Explosion protection categories for gases	None
Explosion protected category for dusts	None


Dimensions

Dimensions of the sensor	
- Width of sensor	40
- Height of sensor	112
- Length of sensor	40

notice

By repositioning the switch 5 different actuating directions can be selected. The selected actuating direction can be marked with a sticker.

Diagram

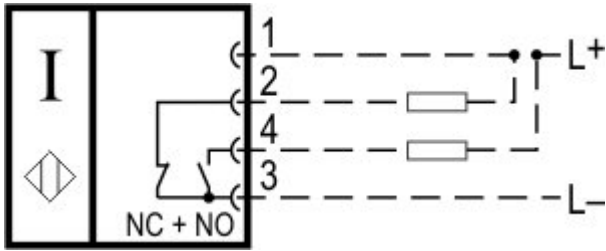


Note Diagram

- positive break NC contact
- active
- no active
- Normally-open contact
- Normally-closed contact

Ordering suffix

The applicable ordering suffix is added at the end of the part number of the safety switch.

Order example: IFL 15-333-11YNG-**1665-1**

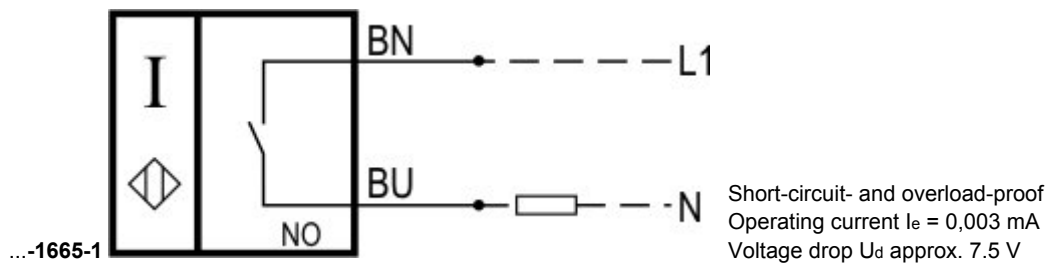

Ordering code

IFL (1)-(2)-(3)(4)(5)(6)

(1)	
15	Switch distance 15 mm
20	Switch distance 20 mm
(2)	
333	Block Design, 112 x 40 x 40 mm
(3)	
01	Opener (NC)
10	Normally open contact (NO)
10/01	Normally open contact (NO) / Opener (NC) with Wiring compartment
11	Normally open contact (NO) / Opener (NC) antivalent
(4)	
without	Cable
D	DC 2-wire
A	Alternating current/direct current AC/DC
(5)	
Y	Protection class IP65
Z	Protection class IP67
(6)	

N
P

n-type
p-type

Documents

Mounting and wiring instructions (de, en, fr) 80 kB, 27.09.2010

Code: m_fl3p01


Declaration of conformity (en) 91 kB, 13.04.2017

Code: konfi_ifl_en

Declaration of conformity (de) 96 kB, 01.07.2016

Code: konfi_ifl_de

Images

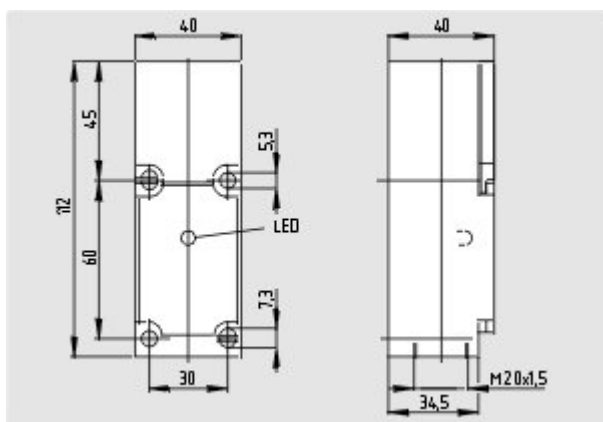

Dimensional drawing (basic component)

K.A. Schmersal GmbH & Co. KG, Mödinghofe 30, D-42279 Wuppertal

The data and values have been checked thoroughly. Technical modifications and errors excepted.

Generiert am 13.02.2019 - 13:05:57h Kasbase 3.3.0.F.64I